

# Galileo Masterclass Brazil (GMB) 2022

## Lecture 1 - Multiple Access for GNSS

Felix Antreich

# Outline

Multiple Access Schemes


Spread Spectrum Signals

Processing Gain and Interference


# Multiple Access (MA)

- ▶ Several satellites need to share the same transmission medium and broadcast to the GNSS users to enable positioning
- ▶ The satellites need to share the transmission medium such that the GNSS users can separate the different satellites, perform ranging, and receive the navigation data
- ▶ The satellites need to share the available bandwidth by using channel access or multiple access (MA) techniques
- ▶ MA techniques have the aim to ensure that signals of the different satellites will be separated or even orthogonal
- ▶ In general there are three basic MA techniques:
  - ▶ Time division multiple access (TDMA)
  - ▶ Frequency division multiple access (FDMA)
  - ▶ Code division multiple access (CDMA)


# Different Basic MA Schemes



Time division multiple access (TDMA)



Frequency division multiple access (FDMA)



Code division multiple access (CDMA)


# MA Schemes for GNSS (1)

- ▶ In principle each of these techniques can achieve the same aggregate spectral efficiency
  - ▶ Symbol rate per user of the channel (satellite)
  - ▶ Number of users per channel (satellites)
  - ▶ Sum symbol rate
- ▶ These basic MA techniques can also be combined to form hybrid combinations
  - ▶ Frequency division and time division (FD/TDMA)
  - ▶ Frequency division and code division (FD/CDMA)
  - ▶ ...
- ▶ For GNSS:
  - ▶ Number of in-view satellites (broadcast users) is quite low (around maximum 12 per system)
  - ▶ Data transmission demands (in general) do not play a prominent role
  - ▶ Mainly other performance measures have to be considered when choosing the appropriate MA technique

## MA Schemes for GNSS (2)

- ▶ Signal design properties for GNSS:
  - ▶ Synchronization accuracy
  - ▶ Synchronization robustness
  - ▶ Inter system multiple access interference (MAI-R) or spectral separation
  - ▶ Intra system multiple access interference (MAI-A)
  - ▶ Interference robustness
  - ▶ Multipath performance
  - ▶ etc.
- ▶ Most GNSS (GPS, Galileo, Beidou) use direct sequence CDMA (DS-CDMA):
  - ▶ Each satellite uses a different code for transmitting its signal
  - ▶ Spectral separation between different GNSS in the same frequency band can be achieved by usage of different modulation schemes  $\Rightarrow$  FD/CDMA
- ▶ GLONASS uses a CD/FDMA approach

# FD/CDMA (DS-CDMA) for GNSS

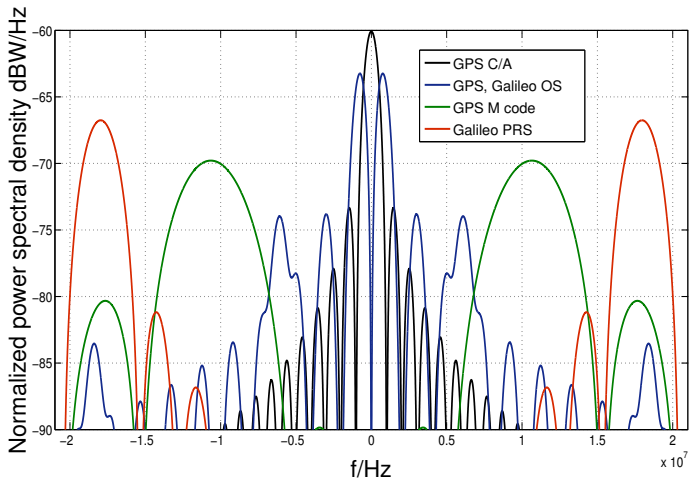

L1/E1 1575.42 MHz

# Outline

Multiple Access Schemes

Spread Spectrum Signals

Processing Gain and Interference



# Signal Model (1)

The received DS-CDMA or CD/FDMA baseband signal of one satellite is given as

$$x(t) = \sqrt{P} g(t - \tau) c(t - \tau) + n(t)$$

- ▶  $P$ : Signal power
- ▶  $c(t)$ : Pseudo random (PR) spreading sequence
- ▶  $\tau$ : Time-delay
- ▶  $g(t) \in \{-1, 1\}$ : Binary navigation message data
- ▶  $n(t)$ : White Gaussian noise with power spectral density  $\frac{N_0}{2}$

## Signal Model (2)

The PR sequence is

$$\begin{aligned}c(t) &= \sum_{m=-\infty}^{\infty} d_m \sqrt{T_c} \delta(t - mT_c) * p(t) \\ &= \sum_{m=-\infty}^{\infty} d_m \sqrt{T_c} p(t - mT_c)\end{aligned}$$

- ▶  $p(t)$ : Chip pulse shape which is not necessarily restricted to be time-limited to only one chip interval
- ▶  $T_c$ : Chip duration
- ▶ PR sequence with  $\{d_m\} \in \{-1, 1\}$
- ▶  $T_d = N_d T_c$ : PR sequence duration
- ▶  $N_d \in \mathbb{N}$ : Number of chips of the PR sequence

## Signal Model (3)

The PR sequence can be assumed (simplified) to be a zero mean

$$E[d_m] = 0$$

and wide-sense cyclostationary (WSCS) sequence with

$$\begin{aligned} E[d_m d_l^*] &= R_d[m, l - m] \\ R_d[m, l - m] &= R_d[m + pN_d, l - m], \quad p \in \mathbb{Z}. \end{aligned}$$

We also assume

$$\frac{1}{T_d} \int_{-\frac{T_d}{2}}^{\frac{T_d}{2}} c(t)c^*(t)dt = \int_{-\infty}^{\infty} \Phi_c(f)df = 1.$$

- ▶  $\Phi_c(f)$ : power spectral density (PSD) of  $c(t)$

# Autocorrelation Function

The autocorrelation of  $c(t)$  can be given as

$$\begin{aligned}R_c(\varepsilon) &= \frac{1}{T_d} \int_{-\frac{T_d}{2}}^{\frac{T_d}{2}} c(t) c^*(t + \varepsilon) dt \\&= \int_{-\infty}^{\infty} |P(f)|^2 \Phi_d(f) e^{j2\pi f \varepsilon} df \\&= \int_{-\infty}^{\infty} |P(f)|^2 e^{j2\pi f \varepsilon} df\end{aligned}$$

with

$$\int_{-\infty}^{\infty} |P(f)|^2 df = 1.$$

- ▶  $P(f)$ : Fourier transform of  $p(t)$
- ▶ The WSCS sequence  $\{d_m\}$  is not only pseudo random but random
- ▶ The power spectral density of the sequence  $\{d_m\}$  is  $\Phi_d(f) = 1$

# Design of Autocorrelation and Cross-Correlation

Based on this interesting result we can conclude:

- ▶ The problem of optimizing cross-correlation and autocorrelation properties of the PR sequence  $\{d_m\}$  can be treated separately as two different problems:
  1. Optimization of WSCS sequences and their properties
  2. Optimization of the chip pulse shape  $p(t)$
- ▶ Easy analysis and understanding of the properties of chip pulse shapes  $p(t)$  and PR sequences  $\{d_m\}$

## Correlation (1)

The receiver performs correlation with a period  $T_d$  using a replica signal based on a model. In case the time-delay  $\tau$  is known to the receiver we can write

$$\begin{aligned}y[k] &= \frac{1}{T_d} \int_{\frac{T_d}{2}(2k-1)}^{\frac{T_d}{2}(2k+1)} \sqrt{P}g(t-\tau)c(t-\tau)c(t-\tau)dt \\ &+ \frac{1}{T_d} \int_{\frac{T_d}{2}(2k-1)}^{\frac{T_d}{2}(2k+1)} n(t)c(t-\tau)dt \\ &= \sqrt{P}g[k] + \check{n}[k]\end{aligned}$$

where  $k = 0, 1, \dots, K - 1$  and  $g[k] \in \{-1, 1\}$ . The power of the signal and the noise after despreading can be given as

$$\begin{aligned}\mathbb{E} \left[ |\sqrt{P}g[k]|^2 \right] &= P \\ \mathbb{E} \left[ |\check{n}[k]|^2 \right] &= \check{\sigma}_n^2 = \frac{N_0}{2T_d}.\end{aligned}$$

## Correlation (2)


Considering the reception of  $N_{sat}$  satellites for either a DS-CDMA or CD/FDMA system we can write

$$\begin{aligned} y[k] &= \frac{1}{T_d} \int_{\frac{T_d}{2}(2k-1)}^{\frac{T_d}{2}(2k+1)} \sqrt{P} g(t - \tau) c(t - \tau) c(t - \tau) dt \\ &+ \underbrace{\sum_{i=1}^{N_{sat}-1} \frac{1}{T_d} \int_{\frac{T_d}{2}(2k-1)}^{\frac{T_d}{2}(2k+1)} \sqrt{P_i} g_i(t - \tau_i) c_i(t - \tau_i) c(t - \tau) dt}_{\approx 0} \\ &+ \frac{1}{T_d} \int_{\frac{T_d}{2}(2k-1)}^{\frac{T_d}{2}(2k+1)} n(t) c(t - \tau) dt \approx \sqrt{P} g[k] + \check{n}[k]. \end{aligned}$$

In case of DS-CDMA, the satellites are separated using different PR sequences while in case of CD/FDMA, the signals are separated spectrally (all satellites use the same PR sequence).

# Discrete Signal Model (1)

In the receiver the observations are collected at  $N$  time instances in  $K$  periods, thus  $x[kN + n] = x((kN + n) T_s)$  with  $n = 0, 1, \dots, N - 1$  and  $k = 0, 1, \dots, K - 1$ , where  $T_s = \frac{1}{2B}$  is the sampling duration. A simplified model of the received baseband signal after sampling can be given as

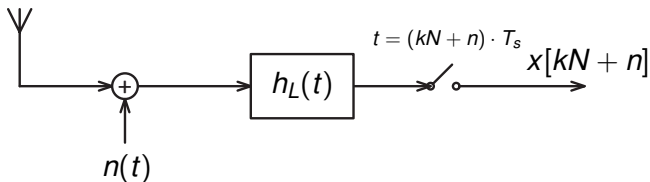

where

$$h_L(t) = 2B \frac{\sin(2\pi Bt)}{2\pi Bt}, \quad H_L(f) = \begin{cases} 1 & |f| \leq B \\ 0 & \text{else} \end{cases}.$$



## Discrete Signal Model (2)

Thus, with

$$T_d = N T_s = \frac{N}{2B}$$

we can write

$$\mathbf{x}[k] = \sqrt{P}g[k]\mathbf{c}[k; \tau] + \mathbf{n}[k], \quad \mathbf{x}[k] \in \mathbb{R}^{N \times 1}$$

where

$$\mathbf{x}[k] = [x(kNT_s), \dots, x((kN + n) T_s), \dots, x((kN + N - 1) T_s)]^T$$

$$\mathbf{n}[k] = [n(kNT_s), \dots, n((kN + n) T_s), \dots, n((kN + N - 1) T_s)]^T$$

$$\mathbf{c}[k; \tau] = [c(kNT_s - \tau), \dots, \dots, c((kN + n) T_s - \tau), \dots, \dots, c((kN + N - 1) T_s - \tau)]^T.$$

## Discrete Signal Model (3)

We assume that

$$\|\mathbf{c}[k; \tau]\|_2^2 = N$$

while in general

$$\|\mathbf{c}[k; \tau]\|_2^2 \neq N, \forall \tau.$$

However, in many cases<sup>1</sup> we can assume that

$$\|\mathbf{c}[k; \tau]\|_2^2 \approx N, \forall \tau \forall k$$

if additionally  $N \geq N_d$  and  $N/N_d \in \mathbb{N}$  we get

$$\mathbf{c}[k; \tau] = \mathbf{c}(\tau), \forall k.$$

## Discrete Signal Model (4)

The autocorrelation function of the PR sequence can be given as

$$R_c[\varepsilon] = \frac{1}{N} \mathbf{c}^T(0) \mathbf{c}(\varepsilon)$$

with

$$\frac{1}{N} \mathbf{c}^T(\tau) \mathbf{c}(\tau) = 1.$$

The receiver performs correlation with a period  $N T_s$  using a replica signal based on a model. In case the time-delay  $\tau$  is known and cross-correlation with other satellites can be neglected we can write

$$\begin{aligned} y[k] &= \frac{1}{N} \mathbf{c}^T(\tau) \mathbf{x}[k] = \frac{1}{N} \sqrt{P} g[k] \mathbf{c}^T(\tau) \mathbf{c}(\tau) + \frac{1}{N} \mathbf{c}^T(\tau) \mathbf{n}[k] \\ &= \sqrt{P} g[k] + \frac{1}{N} \mathbf{c}^T(\tau) \mathbf{n}[k]. \end{aligned}$$

# Outline

Multiple Access Schemes

Spread Spectrum Signals

Processing Gain and Interference


# Spreading Factor (1)

The multiplication of the navigation data sequence  $g(t)$  with the much faster oscillating PR sequence  $c(t)$  introduces a spreading of the spectrum of the navigation data sequence of the factor

$$S = \frac{T_d}{T_c}$$

- ▶  $S$ : Often called spreading factor
- ▶ In general  $T_c \ll T_d$
- ▶ The spread signal thus can be “hidden” below the noise in case the maximum value of the PSD of the noise  $\frac{N_0}{2}$  is larger than the maximum value of the PSD of the spread signal  $\Phi_c(f)$

## Spreading Factor (2)

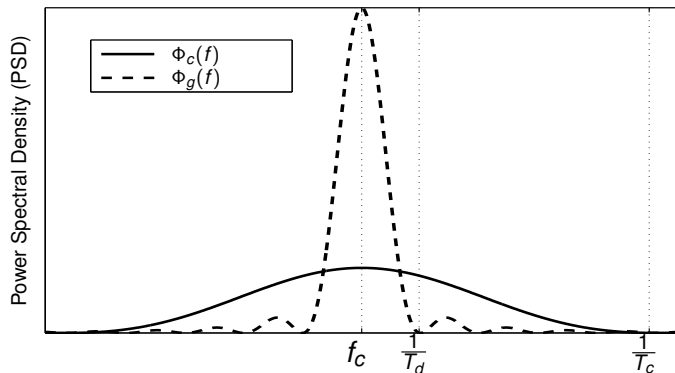

- ▶  $\Phi_g(f)$ : PSD of the navigation data sequence  $g(t)$

## Processing Gain (1)

The signal-to-noise ratio (SNR) before correlation can be given as

$$\text{SNR}_s = \frac{\text{E} \left[ \|\sqrt{P}g[k]\mathbf{c}(\tau)\|_2^2 \right]}{\text{E} \left[ \|\mathbf{n}[k]\|_2^2 \right]} = \frac{P}{\sigma_n^2} = \frac{P}{N_0B}$$

In case the time-delay  $\tau$  is known the SNR after despreading (correlation) can be given as

$$\begin{aligned} \text{SNR}_d &= \frac{\text{E} \left[ \left| \frac{1}{N} \sqrt{P} g[k] \mathbf{c}^T(\tau) \mathbf{c}(\tau) \right|^2 \right]}{\text{E} \left[ \left| \frac{1}{N} \mathbf{c}^T(\tau) \mathbf{n}[k] \right|^2 \right]} \\ &= \frac{P}{\frac{1}{N^2} \mathbf{c}^T(\tau) \underbrace{\text{E} [\mathbf{n}[k] \mathbf{n}^H[k]]}_{=\sigma_n^2 \mathbf{I}_N} \mathbf{c}^*(\tau)} = \frac{PN}{\sigma_n^2} \\ &= \frac{PT_d 2B}{N_0B} = \frac{P}{N_0B_d} = \frac{P}{\check{\sigma}_n^2} \end{aligned}$$

## Processing Gain (2)

The relation between the SNR after and before despreading can be given by

$$\text{SNR}_d = \frac{P}{N_0 B_d} = \frac{PB}{N_0 B_d B} = \frac{P}{N_0 B} \frac{B}{B_d} = \text{SNR}_s G$$

where the so-called processing gain is

$$G = \frac{B}{B_d} = 2r \frac{T_d}{T_c} = 2r S, \quad r \in \mathbb{R}^+.$$

- ▶ The processing gain  $G$  is a result of the change of the noise bandwidth and the resulting noise power
- ▶ The spreading factor  $S$  describes the spreading of  $g(t)$  by multiplication with  $c(t)$  and the processing gain  $G$  describes the gain in SNR after despreading



## Interference

The signal-to-interference-plus-noise-ratio (SINR) before despreading in case of additional interference with power  $J$  (uniformly distributed across  $B$ ) can be given as

$$\text{SINR}_s = \frac{P}{BN_0 + J}$$

The SINR after despreading is

$$\text{SINR}_d = \frac{P}{B_d N_0 + \frac{B_d}{B} J} = \frac{P}{B_d N_0 + \frac{J}{G}}$$

- ▶ For broadband interference the SINR increase after despreading is dependent on the processing gain  $G$
- ▶ System design can incorporate certain interference robustness
- ▶ For narrowband or partial band interference  $c(t)$  spreads the jamming signal so that it appears as wideband Gaussian noise at the output of the correlator