

Ref.: gLAB-SUM
Iss./Rev.: 1.15
Date: 21/10/2020

ESA GNSS Education

GNSS-Lab tool Software User Manual

	Name	Signature	Date
Originally created	P. Ramos-Bosch		
Checked	A. Rovira-Garcia		21/10/2020
Accepted	J.M. Juan		21/10/2020
Authorized	J. Sanz		21/10/2020
Updated	A. Rovira-Garcia Deimos Ibáñez		21/10/2020

File: gLAB_SUM_1.15.docx

Distribution List

Internal	Copies	External	Copies
gAGE/UPC Control	1	ESA	1

Document Change Log

Iss./Rev	Date	Section / Page	Change Description
1.0	08/09/2009	All	First version of the document
1.1	29/10/2009	All	Included RIDS comments from ESA and new screenshots from gLAB v1.2.
1.2	22/01/2010	All	General revision with new gLAB v1.3.1
1.3	08/07/2010	Section 4 - 6	Revision and update with new gLAB v1.4
1.4	31/07/2010	Section 4.1 Section 6.4	Description of Auxiliary files. Inclusion of preferences and about snapshot Removed limitation of combination measurements and to save current configuration to a file.
1.5	31/08/2010	Section 2.1.1 Section 4.2.5 Section 4.2.3	Maximum number of filter iterations added. Satellite elevation and azimuth addition in the Model message. Update according to the new DCB management

Iss./Rev	Date	Section / Page	Change Description
1.6	22/09/2010	All	Update according to the final DCB management and new gLAB v 1.4.4
1.7	1/07/2011	All	Revision and update with new gLAB v2.0.0 SATSEL message included in the output. Tropospheric model splitted into nominal and mapping.
1.8	27/06/2017	All	Revision and update with new gLAB v5.0.0
1.9	20/11/2017	All	Revision and update with new gLAB v5.1.0
1.10	05/03/2018	All	Revision and update with new gLAB v5.2.0
1.11	04/06/2018	All	Revision and update with new gLAB v5.3.0
1.12	16/11/2018	1.2, 5, 6	Added note in section 1.2 stating that this manual is a copy from the command line help (except for the usage examples and plot examples). Revision and update with new gLAB v5.4.0
1.13	15/02/2019	6	Added plotting tool options for adding together the availability percentage of several FIRs in SBAS maps.
1.14	05/03/2019	5	Added parameters for changing K factors in SBAS. Added third argument for parameter '-model:sigmpath'.
1.15	21/10/2020	4.2.3, 5	Added NeQuick ionosphere model parameters

Contents

Contents

1	INTRODUCTION.....	6
1.1	DOCUMENT SCOPE AND PURPOSES	6
1.2	DOCUMENT OVERVIEW AND STRUCTURE.....	7
1.3	APPLICABLE AND REFERENCE DOCUMENTS	7
1.3.1	Applicable documents	7
1.3.2	Reference Documents.....	8
1.3.3	Acronyms and Terms	9
2	GLAB SOFTWARE TOOL.....	11
2.1.1	Software package features	11
2.1.2	Identified limitations.....	14
2.1.3	Minimum hardware requirements	14
2.1.4	Minimum software requirements.....	14
3	INSTALLATION PROCEDURE	16
3.1	WINDOWS.....	16
3.1.1	Manual binary generation	16
3.2	LINUX.....	16
3.3	MAC.....	17
3.4	DIRECTORY STRUCTURE.....	18
4	GLAB GRAPHIC USER INTERFACE (GUI).....	19
4.1	THE BASICS.....	19
4.2	POSITIONING (DPC INTERFACE)	22
4.2.1	Input.....	23
4.2.2	Preprocess	28
4.2.3	Modelling.....	33
4.2.4	Filter	38
4.2.5	Output	46
4.2.6	Summary.....	58
4.3	ANALYSIS (DAT INTERFACE).....	61
4.4	GUI LIMITATIONS	64
4.5	PROCESSING EXAMPLE.....	65
5	GLAB DATA PROCESSING CORE (DPC)	70
5.1	PROCESSING EXAMPLE.....	107
6	GLAB DATA ANALYSIS TOOL (DAT).....	108
6.1	SETTING THE AXIS.....	146
6.2	SETTING THE CONDITIONS	146
6.3	PROCESSING EXAMPLE.....	147

List of Figures

FIGURE 4-1: INITIAL SCREEN OF THE GLAB GRAPHIC USER INTERFACE	19
FIGURE 4-2: MODE DROP-DOWN MENU	20
FIGURE 4-3: TEMPLATES DROP-DOWN MENU	20
FIGURE 4-4: CONFIGURATION DROP-DOWN MENU	21
FIGURE 4-5: PREFERENCES DROP-DOWN MENU	21
FIGURE 4-6: HELP DROP-DOWN MENU.....	21
FIGURE 4-7: SCREENSHOT OF THE INPUT SECTION.	23
FIGURE 4-8: PREPROCESS SECTION SCREENSHOT.	28
FIGURE 4-9: MODELING SECTION SCREENSHOT	33
FIGURE 4-10: FILTER SECTION SCREENSHOT.....	38
FIGURE 4-11: OUTPUT SECTION SCREENSHOT.....	46
FIGURE 4-12: ANALYSIS SCREENSHOT	61
FIGURE 4-13: GUI SPLASH SCREEN.....	65
FIGURE 4-14: <i>INPUT</i> SECTION.....	65
FIGURE 4-15: FILE OPEN DIALOG (1/3).....	65
FIGURE 4-16: FILE OPEN DIALOG (2/3).....	65
FIGURE 4-17: FILE OPEN DIALOG (3/3).....	66
FIGURE 4-18: UPDATED <i>INPUT</i> SECTION.....	66
FIGURE 4-19: ALL INPUT FILES ARE SELECTED	67
FIGURE 4-20: <i>FILTER</i> SECTION	67
FIGURE 4-21: <i>OUTPUT</i> SECTION	67
FIGURE 4-22: FILE OPEN DIALOG FOR SELECTING THE OUTPUT FILE	67
FIGURE 4-23: OUTPUT SELECTED	68
FIGURE 4-24: DPC HAS BEEN EXECUTED	68
FIGURE 4-25: <i>ANALYSIS</i> TAB	68
FIGURE 4-26: RECEIVER NEU POSITION ERROR CONFIGURATION	68
FIGURE 4-27: PLOT SAMPLE	69
FIGURE 4-28: PLOT SAMPLE (ZOOM)	69
FIGURE 5-1: COMMAND LINE SCREENSHOT.....	107
FIGURE 6-1: DAT SCREENSHOT. IT CAN BE SEEN THE POSITION ERROR FOR A PPP KINEMATIC POSITIONING FOR A SINGLE-FREQUENCY RECEIVER.....	108

1 INTRODUCTION

The GNSS-Lab Tool suite (gLAB) is an interactive educational multipurpose package to process and analyse GNSS data. The first release of this software package allowed processing only GPS data. The current release has been expanded to SBAS and differential processing (DGNSS). It is prepared to incorporate future module updates, such as an expansion to Galileo and GLONASS systems.

This software package is targeting the following groups of users:

- Education professionals aiming to teach GNSS from both a theoretical and practical points of view.
- Standalone students and professionals with basic knowledge on GNSS as a self-learning tool.
- Professionals with more in deep knowledge on GNSS who want an easy and user-friendly tool with precise positioning capability.

From an operative point view, this tool is conceived as a software package to support a practical GNSS course, where the fundamentals introduced in the theory are experimented through guided exercises. In this way, the tool is conceived for being used:

- as part of a GNSS course with practical exercises integrated following a manual, or
- experimenting around with contextual help with hyperlinks for more information, or
- to process RINEX data and obtain a standalone or differential positioning

The gLAB tool is distributed within a learning material package containing the following components:

- **Software:** A binary which will be able to read RINEX data, process it and show the results in the form of data files and graphics. The processing options will be fully parametrizable through a GUI that will ease to understand the tool and its different options. The software is able to work in Windows, Linux and Mac Operating Systems.
- **Tutorial:** A book RD-15 containing the GNSS fundamentals and several practical exercises covering from the basics of data processing, such as reading standard RINEX format to more complex processes, as positioning a rover and analysing the results.
- **Data:** The data sets files used in the exercises.

1.1 DOCUMENT SCOPE AND PURPOSES

This document contains the information related to the use of the gLAB software package component of the gLAB suite, and its purpose is to provide an overall overview to the end user of the software. In particular, how to install it and use it, with different options that the software has.

1.2 DOCUMENT OVERVIEW AND STRUCTURE

This document is split in sections, which describe:

- A generic description on the different software modules included in the package (Section 2).
- A detailed description of the installation procedure (Section 3).
- How to use the Graphic User Interface (GUI) component (Section 4).
- How to use the Data Processing Core (DPC) component (Section 5).
- How to use the Data Analysis Tool (DAT) component (Section 6).

IMPORTANT NOTE: All parameters, options and output messages are copied from the command line help of the processing and plotting tools. Therefore, the command line help always has preference over this manual (and may sometimes be more complete), except for the command line usage examples and the plot examples, which are not in the command line help. The command line help can also be accessed through the GUI in the menu: Help->User manuals.

1.3 APPLICABLE AND REFERENCE DOCUMENTS

1.3.1 Applicable documents

The following documents refer to the applicable documents for the project.

AD-01	RINEX-2.10 format: http://igsceb.jpl.nasa.gov/igsceb/data/format/rinex211.txt
AD-02	RINEX-3.00 format: ftp://epncb.oma.be/pub/data/format/rinex300.pdf
AD-03	IONEX format: http://igsceb.jpl.nasa.gov/igsceb/data/format/ionex1.pdf
AD-04	SP3 format: http://igsceb.jpl.nasa.gov/igsceb/data/format/sp3.txt
AD-05	RINEX clock format: http://igsceb.jpl.nasa.gov/igsceb/data/format/rinex_clock.txt
AD-06	ANTEX format: ftp://igsceb.jpl.nasa.gov/igsceb/station/general/antex13.txt
AD-07	RTCA-MOPS, December 2006.
AD-08	PEGASUS Interface Control Document. PEG-ICD-02

1.3.2 Reference Documents

- RD-1 Python Programming Language, <http://www.python.org>
- RD-2 Guide to Applying the ESA Software Engineering Standards to small Software Projects Doc.-No. ESA BSSC (96)2 Issue 1, 199.
- RD-3 Gnuplot: <http://www.gnuplot.info>
- RD-4 Architecture Design Document for gLAB, gAGE/UPC 2009.
- RD-5 ANTEX file: <http://igsceb.jpl.nasa.gov/igsceb/station/general/igs05.atx>
- RD-6 SP3 files: <http://igsceb.jpl.nasa.gov/igsceb/product>
- RD-7 GIPSY OASIS-II, Mathematical description, 1986
- RD-8 A. E. Niell, Global mapping functions for the atmosphere delay at radio wavelengths, Journal of Geophysical Research, Vol. 101, No. B2, p. 3227-3246, 1996.
- RD-9 RTCA, 2001. Minimum Operational Performance Standards For Global Positioning System/Wide Area Augmentation System Airborne Equipment. RTCA/DO-229C. Prepared by SC-159. November 28, 2001. Supersedes DO-229B. Available at <http://www.rtca.org/doclist.asp> . pp. 338-340 of 586 in PDF.
- RD-10 D. McCarthy and G. Petit, IERS Conventions, International Earth Rotation and Reference Systems Service (IERS), 2003
- RD-11 S. Malsys, M. Larezos, S. Gottschalk, S. Mobbs, B. Winn, W. Feess, M. Menn, E. Swift, E. Merrigan and W. Mathon, The GPS accuracy improvement initiative, ION GNSS 1997, Kansas City, USA, pp. 375-384, 1997.
- RD-12 GPSConstellationStatus.txt file, available at:
<http://gge.unb.ca/Resources/GPSConstellationStatus.txt>
- RD-13 ICD-GPS-200, Navstar GPS Space Segment / Navigation User Interfaces, 1993.
- RD-14 Global Positioning System Standard Positioning Service Signal Specification. U.S. Department of Defense, DOD 4650.5/SPSSP V3, 3rd Edition, August 1, 1998.
- RD-15 J. Sanz Subirana, J.M. Juan Zornoza and M. Hernández-Pajares, "GNSS Data Processing" Vol. 1: Fundamentals and Algorithms and Vol. 2: Laboratory exercises. ESA Communications. Noordwijk, the Netherlands. ISSN 1013-7076, ISBN 978-92-9221-886-7 (two volumes plus CD)

1.3.3 Acronyms and Terms

AD	Applicable Document
AWGN	Additive White Gaussian Noise
CRC	Cyclic Redundancy Check
DAT	Data Analysis Tool
DOP	Dilution of Precision
DoY	Day of Year
DPC	Data Processing Core
EGNOS	European Geostationary Navigation Overlay Service
EMS	EGNOS Message Server
ESA	European Space Agency
FIR	Flight Information Region
FTP	File Transfer Protocol
gAGE	Research Group of Astronomy and Geomatics
gLAB	GNSS-Lab tool
GDOP	Geometric Dilution of Precision
GEO	GEostationary
GLONASS	GLObal NAVigation Satellite System
GNSS	Global Navigation Satellite System
GUI	Graphic User interface
GPS	Global Positioning System
HDOP	Horizontal Dilution of Precision
HE	Horizontal Error
HPE	Horizontal Positioning Error
HMI	Hazardous Misleading Information
HPL	Horizontal Protection Level
HWIR	Horizontal Worst Integrity Ratio
ICD	Interface Control Document
IGS	International GNSS Service
IGP	Ionospheric Grid Point
IALA	International Association of marine aids to navigation and Lighthouse Authorities
IMO	International Maritime Organization
IOD	Issue of Data
IODE	Issue of Data Ephemeris
IODF	Issue of Data Fast Correction
IODI	Issue of Data Ionospheric
IODP	Issue of Data PRN mask
IODS	Service Issue of Data
IONEX	IONosphere map Exchange format
IPP	Ionospheric Pierce Point
LTC	Long Term Corrections
MI	Misleading Information
MT	Message Type
MOPS	Minimum Operational Performance Standards

NPA	Non Precision Approach
OS	Operative System
PA	Precision Approach
PDOP	Position Dilution of Precision
PL	Protection Level
PEGASUS	Prototype EGNOS and GBAS Analysis System Using SAPPHIRE
PPP	Precise Point Positioning
PRC	Pseudo Range Correction
PRN	PseudoRandom Noise
RD	Reference Document
RINEX-B	Receiver Independent EXchange format Binary
RRC	Range Rate correction
RSS	Root Sum Square
SAPPHIRE	Satellite and Aircraft Data Base for System Integrity Research
SBAS	Satellite Based Augmentation System
SIS	Signal In Space
SNR	Signal to Noise Ratio
SOW	Statement Of Work
S/W	Software
TBC	To Be Confirmed
TBD	To Be Determined
TBW	To Be Written
TGD	Total Group Delay
TOW	Time of Week
UD	User Domain
UDRE	User Differential Range Error
UDREI	User Differential Range Error Indicator
UIVE	User Ionospheric Vertical Error
UPC	Technical University of Catalonia
URA	User Range Accuracy
URL	Uniform Resource Locator
VDOP	Vertical Dilution of Precision
VE	Vertical Error
VPE	Vertical Positioning Error
VPL	Vertical Protection Level
VWIR	Vertical Worst Integrity Ratio
WIR	Worst Integrity Ratio

2 gLAB SOFTWARE TOOL

The gLAB software tool is able to run under Linux and Windows operating systems (OS). It is programmed in ANSI C, Python and Qt languages and contains three main software modules:

- Data Processing Core (DPC) [gLAB.exe in Windows, gLAB_linux for Linux, gLAB_mac for Mac]
- Graphic User Interface (GUI) and [gLAB_GUI.exe in Windows, gLAB_GUI in Linux and Mac]
- Data Analysis Tool (DAT) [graph.exe in Windows, graph.py in Linux, graph in Mac].

The DPC implements all the data processing algorithms and can be executed either, in command line or with the GUI. The GUI consists in different graphic panels for a user friendly managing of the SW and the tool configuration. They provide all the options to configure the model and navigation. The Data Analysis Tool provides a user friendly environment for the data analysis and results visualizing.

The tool contains a precise modelling of the GNSS observables (code and phase) at the centimetre level, allowing both standalone positioning and PPP. The current release has been expanded to SBAS and differential processing (DGNSS). The software is ready to incorporate future updates to Galileo or GLONASS systems.

2.1.1 Software package features

- Graphic User Interface (GUI) to ease the utilisation of the tool with most of the capabilities of the DPC. The GUI allows a high customisation interface to process a wide range of options.
- Tooltips in the GUI, which allow understanding and using the different options.
- Capable to read:
 - Station measurements from Observation RINEX standard version 2.11 and 3.00.
 - Broadcast message from Navigation RINEX standard version 2.11 and 3.00.
 - Satellite clocks from Clocks RINEX standard.
 - Satellite orbits and clocks from SP3 standard.
 - Ionospheric maps from IONEX standard.
 - Constellation status (with information between Satellite Vehicle Number (SVN) and PRN) of the satellite.
 - Antenna Phase Center information from ANTEX standard.
 - Differential Code Biases from precise .DCB files.
 - Receiver type information from GPS Receiver File Types.

- The DPC is able to work both with command-line parameters and a configuration file.
- Automatically detects if the format is RINEX 2.11 or 3.00.
- Fully capable to read Galileo (and other constellations) from RINEX.
- Able to process both pseudorange and carrier phase.
- Detection of cycle-slips in carrier phase measurements for GPS with three different methods:
 - Geometric-free carrier phase combination.
 - Melbourne-Wübbena combination.
 - Code-Phase difference (for single-frequency receivers),
- Time handling routines (The native time format of the software is Modified Julian Day and seconds of day).
- Prealignment of carrier phase to pseudorange measurements. This is done to avoid large differences between both kinds of measurements, and allow a more direct comparison. The alignment is done keeping the integer part of the carrier phase.
- Pseudorange jump checking. Some receivers have an inconsistent set of pseudorange and carrier phase measurements when they adjust their own clock (doing one or more leap milliseconds). Their pseudorange measurements are consistent with this change in clock, but carrier phases do not show it. This creates an inconsistency and a general cycle-slip for all satellites if not handled properly. gLAB detects and corrects this problem.
- Decimation capabilities. gLAB can decimate the input RINEX to increase computation speed if a high sampling rate is not needed. The decimation comes after the cycle-slip detection to take full profit of the input data rate.
- Able to individually select/deselect each satellite for processing.
- Able to set an elevation mask to ignore low satellites for processing.
- Able to specifically mark which frequencies are available (to simulate single-frequency receivers from dual-frequency RINEX data).
- Pseudorange smoothing option.
- Orbit interpolation of SP3 data.
- Broadcast message support (orbit estimation, clock correction, TGD correction).
- Orbit/Clock comparison mode (it can compare the orbit and clocks from 2 different sources, i.e. broadcast, SP3 and clocks files).
- Sun approximate positioning (for satellite orientation).
- Models implemented (all of them can be enabled or disabled):
 - Satellite clock error correction.
 - Transmission time computation.
 - Earth rotation in flight time of the signal.

- Satellite phase center correction.
 - Receiver phase center correction.
 - Receiver Antenna Reference Point (ARP) correction.
 - Relativistic correction.
 - Ionospheric correction: Klobuchar, BeiDou, SBAS or IONEX.
 - Tropospheric correction [one simple model and the more refined Niell mapping model]
 - P1 – P2 Differential Code Bias (DCB) correction.
 - P1 – C1 Differential Code Bias (DCB) correction.
 - Wind up effect.
 - Solid tides correction.
 - Gravitational delay correction [an effect of general relativity due to the gravity field gradient between receiver and transmitter].
- Able to choose different measurements (1 or more) for the filter estimation (both carrier phase and pseudorange). It could even work with a set of different pseudorange measurements from different signals. This can be useful in the future Galileo scenario, where some processing with different measurements can be desired.
 - Able to assign different weights for different measurements.
 - Able to assign elevation dependant weights.
 - Able to translate from cartesian (native of the software) to geodetic coordinates.
 - Orientation estimation of both the satellites and the receiver (and thence the azimuth/elevation of the receiver-satellite pair).
 - Standalone processing using broadcast and C/A code (fully configurable to be able to used also carrier phase if required).
 - Precise Point Positioning (PPP) with precise orbit and clocks, precise models and Pc/Lc measurements (ionospheric-free combinations). It is also fully configurable.
 - Able to create different plots to visualise the data processed.
 - Detection and warning of convergence problems.
 - Able to read a reference position file (in columnar text file format, in SP3 format or RTKlib output file format) for comparing gLAB position with the reference position.
 - Able to read a user defined error file (a columnar text file) in order to add error to measurements.
 - Able to read a sigma multipath file (a columnar text file) in order to make a user defined sigma multipath in function of elevation or SNR (for SBAS mode).
 - Provides a built in Date format and coordinate system convertors.

2.1.2 Identified limitations

The current version gLAB only implements full processing capabilities for GPS data. Nevertheless, the reading of RINEX-3.00 Galileo and GLONASS data functionality is also included, allowing performing some exercises on data analysis with real or simulated Galileo and GLONASS measurements.

2.1.3 Minimum hardware requirements

gLAB requires the following computer minimum hardware requirements in order to be properly executed:

- 1GB of RAM memory.
- CPU with at least 1GHz.
- 1GB of hard disk free space.
- Screen resolution of at least 1024x768 is recommended, but the program window can be resized at will.

2.1.4 Minimum software requirements

The program runs under Windows (XP, Vista, 7, 8, 10) and Linux (Ubuntu 10.04 and above) Operating systems (in both 32 and 64 bit systems). It also works in Mac, from version 10.11 (El Capitan) and onwards.

2.1.4.1 Windows

No specific software is required to execute the program in Windows.

2.1.4.2 Linux

For Linux users, the following programs are required:

- make 3.81
- gcc 4.4.3
- Python v2.5.4
- Python matplotlib v0.98.5.4
- Python Tkinter v5.4.0
- Python Basemap v1.0.7
- Python Numpy v1.3.0

These programs can be installed by executing the following command line instructions:

```
sudo apt-get install make gcc
```

```
sudo apt-get install python python-wxtools python-matplotlib python-tk python-  
mpltoolkits.basemap python-mpltoolkits.basemap-data python-numpy
```

In order to use the plotting tool with Python 3, the following packages must be installed:

```
sudo apt-get install python3-matplotlib python3-tk python3-mpltoolkits.basemap python-  
mpltoolkits.basemap-data python3-numpy
```

2.1.4.3 Mac

No specific software is required to execute the program in Mac, as all binaries are precompiled.

3 INSTALLATION PROCEDURE

The gLAB software package can be downloaded from the following URL:

<http://www.gage.es/gLAB/>

In this web page it is possible to download the last version of gLAB in Windows, Linux and Mac.

3.1 WINDOWS

The installation of the Windows version is initiated by executing the installation program. During the installation process you have several configurable options, such as the installation directory (by default, C:\Program Files\gLAB), and the possibility to create shortcuts.

The installation will create a gLAB group in the start menu with the following elements:

- *gLAB on the Web*, will forward to the webpage of gLAB.
- *Uninstall gLAB*, to completely remove gLAB from the computer.
- *gLAB_GUI*, the Graphic User Interface of gLAB.
- *Command line in directory*, which will open a new command line window in the directory gLAB was installed.

Executing the gLAB_GUI option will run the GUI program.

3.1.1 Manual binary generation

All the binaries of the Windows version of gLAB have been precompiled, so no need to compile them again would be required.

For the manual binary generation the following programs need to be installed (other versions may also work):

- MinGW v5.1.4 (<http://sourceforge.net/projects/mingw/files/>)
- Python(x,y) v2.1.14 (<http://www.pythonxy.com>). During its installation please select as "type of install": *Full*.

Once these programs have been installed, the script "createEXE.bat" can be executed. This script can be found in the installation directory of gLAB, and will compile everything and create the proper binaries.

3.2 LINUX

gLAB has been successfully tested under Ubuntu, but should work in other Linux distributions.

The Linux version of gLAB has to be decompressed to a directory, using the following command:

```
tar -xvzf glab_vx.x.tgz
```

This will create a directory called 'gLAB' with all the program structure. Next, it is necessary to compile the DPC, for this:

```
cd gLAB
```

```
make
```

This will create the binary for the DPC of gLAB (gLAB_linux).

In order to be able to launch the python programs (GUI and DAT), it is necessary to have the following packets installed in the system (other versions may also work):

- Python v2.5.4
- Python matplotlib v0.98.5.4
- Python Tkinter v5.4.0
- Python Basemap v1.0.7
- Python Numpy v1.3.0

In Ubuntu, this can easily be done by using the following command:

```
sudo apt-get install python python-matplotlib python-tk python-mpltoolkits.basemap python-mpltoolkits.basemap-data python-numpy
```

NOTE: For executing graph.py program in Python3, the following additional packages have to be installed:

```
sudo apt-get install python3-matplotlib python3-tk python3-mpltoolkits.basemap python-mpltoolkits.basemap-data python3-numpy
```

3.3 MAC

gLAB has been successfully tested under OS X 10.11 and OS X 10.12. It should work for future OS X versions.

To install, simply double click on the ".dmg" file, and drag the "gLAB_GUI" icon to the "Applications" folder.

To open gLAB, open Mac launcher and click on "gLAB_GUI".

3.4 DIRECTORY STRUCTURE

gLAB

gLAB/LICENSES

gLAB/source

gLAB/test

gLAB/win

The *gLAB* directory contains all the binaries, python programs and other files.

The *gLAB/LICENSES* directory contains the licenses of the *gLAB* (Apache, GPL and LGPL).

The *gLAB/source* directory contains the source code of the different *gLAB* components (DPC, GUI and plotting tool).

The *gLAB/win* (only available in the windows distribution) directory contains all the required data for the GUI and DAT binaries. This directory can be fully generated by the “Manual binary generation” procedure set above.

The *gLAB/test* directory contains a set of test files to be used with the *gLAB* program.

4 gLAB GRAPHIC USER INTERFACE (GUI)

4.1 THE BASICS

The GUI is an interface between the other two components, the DPC and the DAT. It will allow the user changing different parameters, and execute the other two programs with the proper arguments. The initial screen of the GUI can be seen in Figure 4-1.



Figure 4-1: Initial screen of the gLAB Graphic User Interface

The menu in the top-bar can be found with different drop-down sub-menus. The following sections will provide in-deep information on the different options of the GUI. Most of the information here can also be found with the inline tooltips.

- **Mode:** Selects the different functions of the gLAB:
 - Positioning: The interface with the DPC, allows selecting all the different processing options to be performed.
 - Analysis: The interface with the plotting, and allows selecting all the different plotting options.
 - Converter: The interface to convert SBAS and RTCM formats to RINEX, EMS and Pegasus formats, see AD-08.
 - Compare Orbits & Clocks: Mode to compare the orbit and clocks from 2 different sources, i.e. broadcast, SP3 and clocks files.
 - Show Orbits & Clocks: Mode to calculate satellite coordinates, velocities and clocks.

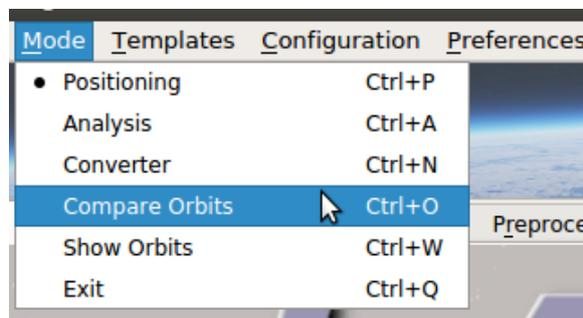


Figure 4-2: Mode drop-down menu

- **Templates:** Configure all the options of the program for a specific processing
 - SPP: to perform a Standard Positioning Service (SPS) processing.
 - PPP: to perform a Precise Point Positioning (PPP) processing for the computation of precise satellite coordinates.
 - SBAS: to use the differential corrections from SBAS.
 - DGNS: to perform a differential processing from a reference station.

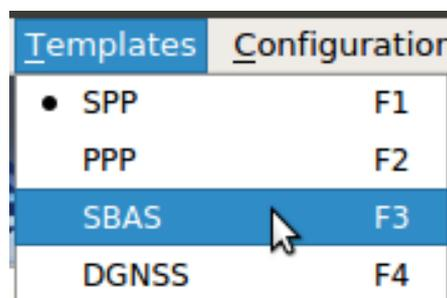


Figure 4-3: Templates drop-down menu

- **Configuration:** Allows saving and loading the configuration of the tool. By default it generates the minimum set of instructions to change the defaults of the DPC, but all options can be saved if desired. In addition, the command line instruction generated by the GUI to be executed by the DPC can be displayed.

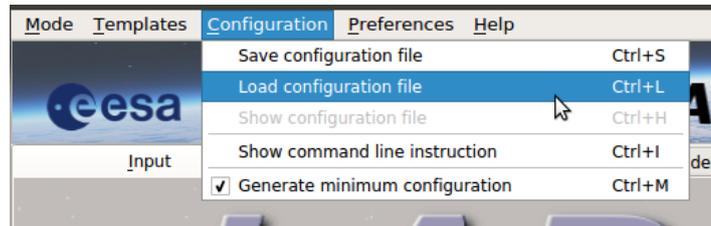


Figure 4-4: Configuration drop-down menu

- **Preferences:** Allows to select/deselect explanatory tooltips (selected by default), and to show the header of the GUI (selected by default).

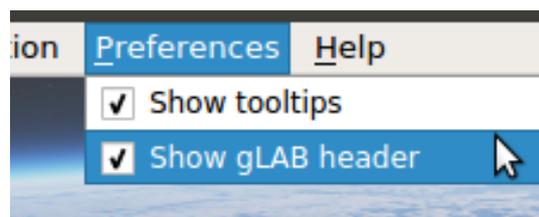


Figure 4-5: Preferences drop-down menu

- **Help:** This section contains useful information about gLAB such as the manuals, the release notes, credits, a date and coordinate convertor and the possibility to check for new updates. It also includes links to ftp sites to download data and the gLAB website, among others.

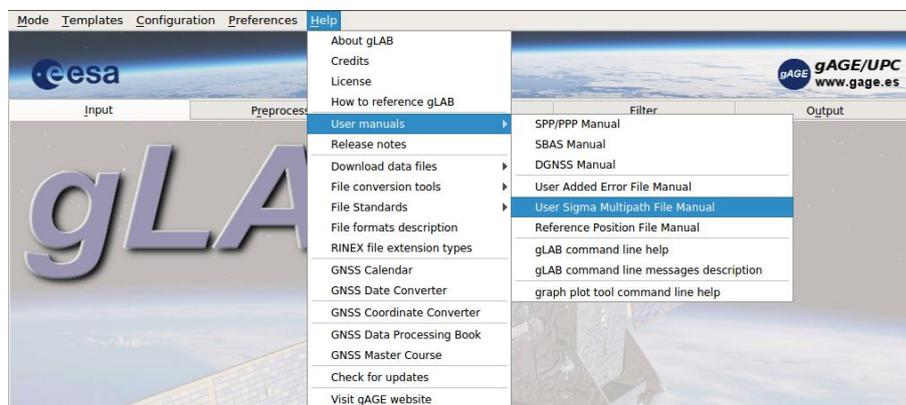


Figure 4-6: Help drop-down menu

4.2 POSITIONING (DPC INTERFACE)

The positioning mode is split into 5 different sections, which correspond to 5 different modules inside the DPC (see the Architecture Design Document for gLAB RD-4). The different modules of the DPC are:

- *INPUT module*: It can be understood as a "driver" between the input data and the rest of the program. This module implements all the input reading capabilities and stores it in structures defined in the DATAHANDLING module.
- *PREPROCESS module*: This module processes the data before the MODEL. It checks for cycle-slips, pseudorange-carrier phase inconsistencies and decimates the data (if required).
- *MODELLING module*: This module has all the functions to fully model the receiver measurements. As said, it implements several kinds of models, which can be activated or deactivated.
- *FILTER module*: This module implements an Extended Kalman Filter (EKF) fully configurable, and obtains the estimations of the required parameters.
- *OUTPUT module*: This module outputs the data obtained from the FILTER.

4.2.1 Input

This section provides all the configuration options to select the input files for gLAB.

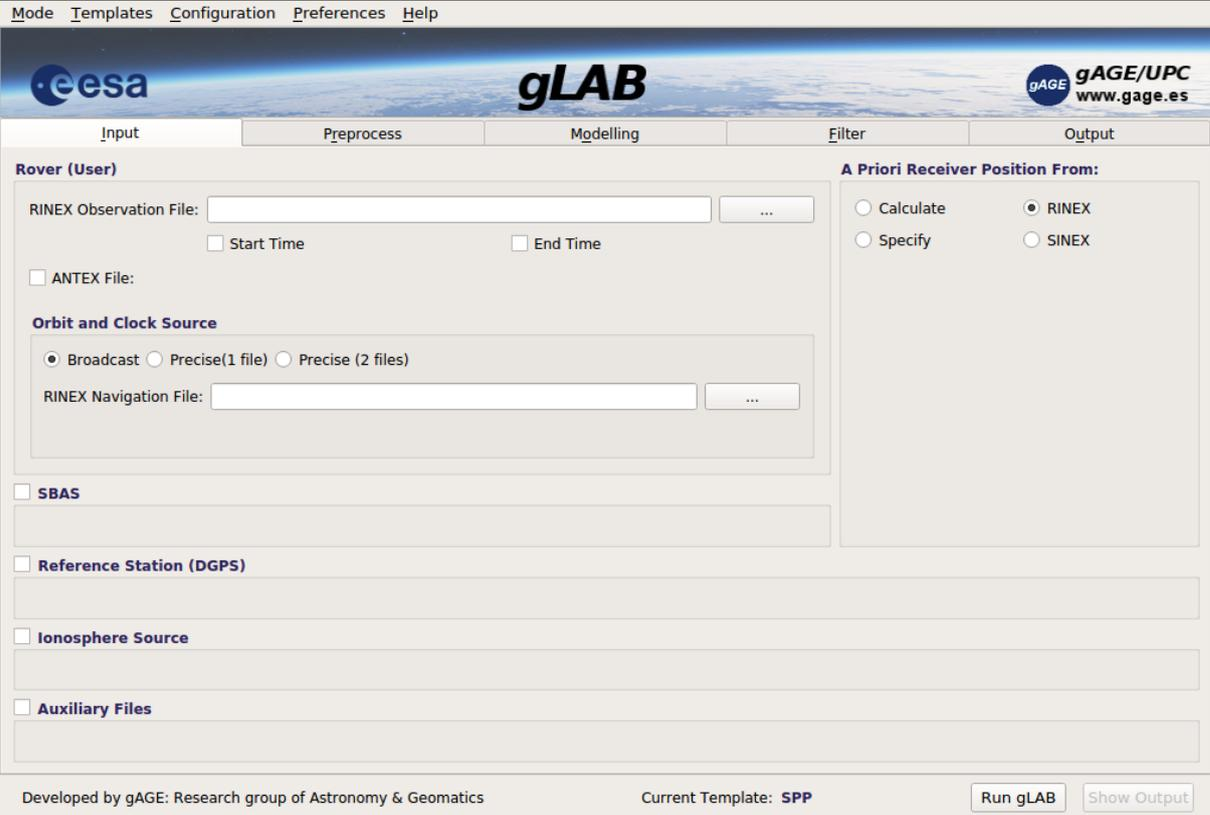


Figure 4-7: Screenshot of the INPUT section.

- Input files: Section to include all the files required for the proper functioning of the program.
 - RINEX Observation File: Source GNSS measurements data file in RINEX format (version 2.11 or 3.00).
 - ANTEX File: Antenna phase center information for both GNSS satellites and receiver antennas¹.

¹ The last ANTEX files can be found in: [RD-5]. The gLAB suite includes two different ANTEX files: igs05.atx and igs_pre1400.atx. The first file is directly downloaded from [RD-5], and should be used for data sets after GPS week 1400 (5th of November of 2006). The second one should be used before this date. This is because there was a change in the way that Satellite Phase Centers were obtained. Thence using Precise files for navigation with the incorrect set of ANTEX file will be translated in higher than expected errors.

- Orbit and Clock Source: Origin of the orbit and clock products. The option selected here must be consistent with the *Navigation Mode* in the Filter section: Broadcast => Standalone, Precise (1 file) or Precise (2 files) => PPP
 - Broadcast: RINEX navigation file with the broadcasted message [Standalone option must be marked in the Filter section].
 - Precise (1 file): SP3 format file with the position/clock errors of GNSS satellites for a set of specific timestamps [PPP option must be marked in the Filter section]².
 - Precise (2 files): The source of orbits will be an SP3 format file, and the clocks will be a RINEX clock format. While orbit data can be interpolated without much data degradation, clocks cannot be. The RINEX clock format allows providing clocks at a high rate, while reading the orbits at a lower rate from the SP3 file [PPP option must be marked in the Filter section].
 - Orbits SP3 File: Source of orbit data.
 - Clocks Rinex File: Source of clock data.
- Ionosphere Source: Origin of the ionosphere data when correcting it (see the

² SP3 files can be found at the IGS site: [RD-6].

Modelling section (4.2.3) for more information).

- Broadcast (same as navigation): For Klobuchar ionospheric model, use the same broadcasted file as for the orbits and clocks for the Klobuchar parameters.
- Broadcast (specify): For Klobuchar ionospheric model, specify a different broadcasted file to use for the Klobuchar parameters. This option is also useful when using SP3 and correcting ionosphere.
- A priori Receiver Position: Initial receiver position. This is used to linearize the filter and to obtain the values for the models. The OUTPUT message type gives the position obtained by the filter differenced with this a priori position. So if this position is accurate enough, the difference can be used as a direct measure of the error.
 - Specify:
 - Specify the receiver position in XYZ components (in meters) or geodetic components (in degrees and meters).
 - Provide a reference position file. The position of this file will be used as a priori position and for computing the differential fields in the OUTPUT message.
 - Use RINEX Position: Use the *APROX POSITION XYZ* field of the RINEX of measurements.

- Calculate: Do not provide a priori position, gLAB will calculate it, and adjust it as necessary (useful for moving receivers, or when the approximate receiver position is unknown) with three different initial options:
 - Earth's surface: gLAB will automatically calculate the a priori receiver position, starting from Earth's surface (6378137,0,0).
 - RINEX Header: gLAB will automatically calculate the a priori receiver position, but starting from the RINEX observation header record APPROX POSITION XYZ. If these coordinate are (0,0,0), then the Earth's surface (6378137,0,0) will be used as initial coordinates.
 - Specify: gLAB will automatically calculate the a priori receiver position, but starting from the user coordinates. These coordinates cannot be (0,0,0).

A reference position file can also be provided. If it is given, the differential fields of the OUTPUT message will be compared with the position from the reference file. If no reference position file is given, this fields will be zero.

- Use SINEX File: Match the observation RINEX header record MARKER NAME with the marker position present in the SINEX file.
- Baseline (DGNSS mode only): gLAB will compute a priori receiver position. The differential fields of the OUTPUT message will be compared with the reference station coordinates, which is read from the reference station observation file or RTCM file.
- User Baseline (DGNSS mode only): Same as “Baseline” mode, but reference station coordinates are provided by user (in XYZ or geodetic).
- RINEX Rover (DGNSS mode only): gLAB will compute a priori receiver position. The differential fields of the OUTPUT message will be compared with the rover coordinates read from the Rover observation file. Reference station coordinates are read from the reference station observation file or RTCM file.
- User RINEX Rover (DGNSS mode only): Same as “RINEX Rover” mode, but reference station coordinates are provided by user (in XYZ or geodetic).
- Specify Rover (DGNSS mode only): gLAB will compute a priori receiver position. The differential fields of the OUTPUT message will be compared with the rover coordinates provided by the user (in XYZ or geodetic) or with coordinates read from a reference position file. Reference station coordinates are read from the reference station observation file or RTCM file.
- User Ref & Rover (DGNSS mode only): Same as “Specify Rover”, but reference station coordinates are provided by user (in XYZ or geodetic).

In the Help menu, section “User manuals”, there is a description on how to generate a reference position file.

- Auxiliary files: User can provide different auxiliary files: to get information about the receiver and to correct the Differential Code Biases (DCB) which are the delays due to electronic, antennas and cables of receiver and transmitter devices which directly affect the measurements with a bias. This effect can be corrected using the information extracted from: The RINEX Navigation file or Precise .DCB files.

- P1 – P2 DCB Source files:
 - Broadcast (same as navigation): Use the same RINEX navigation file for the DCB computations than the orbit and clock product source.
 - Broadcast (specify): Specify a different RINEX broadcasted file to obtain the codes (P1 – P2) digital bias.
 - Precise .DCB file: Specify a .DCB file for the (P1 – P2) biases for all satellites.
- P1 – C1 DCB Source files:
 - Receiver Type file: Specify a file with the receiver type information: Receivers, Antennas, Radomes, and Antenna+Radome manufacturer's name, model and code.
 - Precise .DCB files Specify a .DCB file for the (P1 – C1) biases for all satellites.
- User added error files: Columnar text file which indicates the user defined error that gLAB must add to measurements. In the Help menu, section “User manuals”, there is a description on how to generate this file.
- User defined SBAS sigma multipath file: Columnar text file for a user defined SBAS sigma multipath in function of the satellite’s elevation or SNR. In the Help menu, section “User manuals”, there is a description on how to generate this file.
- Save Config button: Stores all the GUI configuration into a .cfg file, which can afterwards be read by the processing core by means of the ‘-input:cfg’ parameter.
 - In Linux:
`./gLAB_linux -input:cfg gLAB.cfg`
 - In Windows:
`gLAB.exe -input:cfg gLAB.cfg`
- RUN button: Execute the DPC program with all the configured parameters of the *Calculus* tab. This button can be used in all Input, Preprocess, Modeling, Filter and Output sections.
- Show Output button: Opens a text editor of the output of the last execution of gLAB.

4.2.2 Preprocess

This section provides all the configuration options to preprocess the input data. In particular, it allows changing the decimation rate, the elevation mask, the cycle-slip detection, and selecting individual satellites for the processing. Figure 4-8 shows a screenshot of the PREPROCESS section.

Figure 4-8: Preprocess section screenshot.

- Station Data.
 - Data Decimation [s]: This option will decimate the input data at the specified rate [in seconds]. If this option is unchecked, every time an epoch is found in the input RINEX observation file, all the processing takes place. If this option is checked, the data is decimated and not even modeled. Even in decimated data, all the epochs are used for cycle slip detection, and arc length computations, but the process is stopped just before the modeling. This option is meant to be used to reduce computation time.
 - Check for jumps in code measurements: Some receivers do not output a set of physically consistent measurements, when they adjust their clock, a "jump" should appear both in pseudorange and carrier-phase measurements, but it only appears in pseudorange. This creates a massive cycle-slip for all satellites in this epoch if it is not corrected.

- If this option is enabled, gLAB will detect and correct this behaviour, providing a set of consistent observables.
- Satellite options.
 - Elevation Mask [Degrees]: The elevation mask parameter is used to discard all the satellites below the specified elevation. Low elevation satellites should be discarded for geodetic processing as they may contain increased errors due to low signal-to-noise ratio and multipath.
 - SNR Mask [dBHz]: This parameter allows to discard satellites below a SNR (Signal to Noise Ratio) threshold, which is included in the measurements of the RINEX observation file (in the last character of the measurement or as a separate measurement).
 - Align carrier phase measurement with code: In the first sample of each arc, for each couple of code and carrier phase measurements, compute the difference between them. During the same arc, add this constant difference to the carrier phase measurement. Therefore, the carrier phase measurement is at the same scale (aligned), and the scale of the ambiguities are reduced.
 - Discard satellites under eclipse condition: This option allows to activate the discard of satellites if they are under eclipse conditions:
 - They do not have direct visibility of the Sun or
 - They have been in the former condition at some time of the last 30 minutes.
 - Discard unhealthy satellites (Broadcast only): This parameter allows discarding satellites based upon the healthy flag of the broadcasted navigation message.
- Cycle-slip Detection: This section provides all the configuration options for cycle-slip detection. This is only used for carrier phase measurements, and in the present version of the software for GPS only. Each cycle-slip detection method can be enabled/disabled individually.
 - Data Gap: This parameter sets the maximum period of time (in seconds) allowed between two consecutive data samples. Therefore, a larger period of time between data samples will automatically declare a cycle-slip.
 - Loss of Lock Indicator (LLI): The LLI parameter is included in the carrier phase measurements of the RINEX observation file (in the penultimate character). When it is odd (i.e. 1, 3, 5 or 7), indicates that the measurement may contain cycle-slip.
 - N Consecutive Samples: When there is a data gap between samples smaller than the maximum allowed, wait until there are **N consecutive sample** to use again data from this satellite. It is not a cycle-slip detector, but it his is useful for discarding measurements of satellites which are constantly appearing and

disappearing (they usually have measurements with large error). The minimum value for N consecutive is 2 samples (wait until the second consecutive sample). Smaller values will disable this option.

- Geometric-free CP Combination [F1-F2]: This cycle-slip detector for dual-frequency receivers uses only carrier phase measurements. The detection is based on fitting a second-degree polynomial with the the geometry-free combination within a sliding window of **N-sample**. Note that this combination may be affected by ionosphere. A cycle-slip is declared when any of the two following statements (OR) is fulfilled:

1. If the expected value is larger than the measured one by more than a specific threshold (Th) **AND** also larger than 2 times the residual (res) of the Least Square (LS) used to fit the second-degree polynomial. The threshold is obtained as:

$$Th = \text{maximum threshold} / (1 + \exp(-\text{Data Gap} / \text{Time constant}))$$

Therefore, the conditions to fulfill a cycle-slip are:

$$| LIt - LIEstimated | > Th$$
$$| LIt - LIEstimated | > 2 * res$$

2. The jump between two consecutive geometry-free combinations (LI) is larger than the **maximum jump threshold** (MaxJumpTh). That is,

$$| LIt - LI_{t-1} | > \text{MaxJumpTh}$$

N-sample is the number of epochs used to fit the second-degree polynomial. Notice that **N-sample** will be overridden by **n**, where:

$$n = \text{maximum}(\text{N-sample of L1-C1 [if enabled]}, \text{N-sample of Melbourne-Wübbena [if enabled]}, \text{N-sample of Geometry-free [if enabled]})$$

NOTE: When a cycle-slip is detected, the sample will be set as an outlier and ignored. If in the next sample a cycle-slip is also detected, a cycle-slip will be declared. Otherwise, the arc will be maintained.

- Melbourne-Wübbena Combination [F1-F2]: This cycle-slip detector for dual-frequency receivers uses the Melbourne-Wübbena combination (geometry-free ionosphere-free). This combination uses pseudorange measurements, and thence, can be very affected by high noise and multipath effects. This combination is basically a constant with noise and jumps due to the cycle-slips. In this sense, the mean, the standard deviation and a mobile mean over the sliding **window** (last seconds) is computed. A cycle-slip is declared when all

these three conditions are fulfilled:

1. The mean is compared with the measured value, and it must be larger than a specified threshold. The threshold depends on the standard deviation from the last cycle-slip, and is computed as: $Th = \mathbf{k-factor} \cdot \mathbf{stdDev}$

2. The mobile mean over the **window** is compared with the measured value, and it must be larger than the wave length of the Melbourne-Wübbena combination (~0.8 m).

3. The standard deviation must be equal or larger than the **minimum stdDev** (configurable parameter) set as default to the wave length of the Melbourne-Wübbena combination (~0.8 m).

N-sample is the number of epochs needed before the detection function is active. Notice that **N-sample** will be overridden by **n**, where:

$n = \text{maximum}(\text{N-sample of L1-C1 [if enabled]}, \text{N-sample of Melbourne-Wübbena [if enabled]}, \text{N-sample of Geometry-free [if enabled]})$

NOTE: When a cycle-slip is detected, the sample will be set as an outlier and ignored. If in the next sample a cycle-slip is also detected, a cycle-slip will be declared. Otherwise, the arc will be maintained.

- L1-C1 Difference [F1]: This cycle-slip detector for single-frequency receivers uses the difference between L1 and C1 (L1P and C1C). This difference contains basically noise coming from C1, sudden jumps coming from cycle-slips, and a ionospheric divergence with time, due to the different effects that the ionosphere causes in carrier phase and pseudorange measurements. This detector computes the mean and standard deviation of L1-C1 along the epochs, proving a sliding window to limit the divergence. The expected mean value is compared against the obtained one, and if it is larger than a specific threshold, a cycle-slip is declared.

The threshold is obtained as:

$$Th = \mathbf{k-factor} \cdot \mathbf{stdDev}$$

The sigma is inflated with an **initial stdDev** during the first iteration and after every cycle-slip to avoid noisier or unrealistic sigma estimates.

N-sample is the number of epochs needed before the detection function is active. Being **k**, **initial stdDev**, **window size** and the **N-sample** configurable

parameters.

Notice that **N-sample** will be overridden by **n**, where:

$n = \text{maximum}(\text{N-sample of L1-C1 [if enabled]}, \text{N-sample of Melbourne-Wübbena [if enabled]}, \text{N-sample of Geometry-free [if enabled]})$

- GNSS Satellite Selection: The buttons allow to individually select/deselect each satellite for processing. A deselected satellite shall not be taken into account when processing. Green color marks selected satellites and red deselected satellites.

4.2.3 Modelling

This section provides the configuration options to set/unset each individual model that is used by gLAB. Figure 4-9 shows a screenshot of the MODEL section.

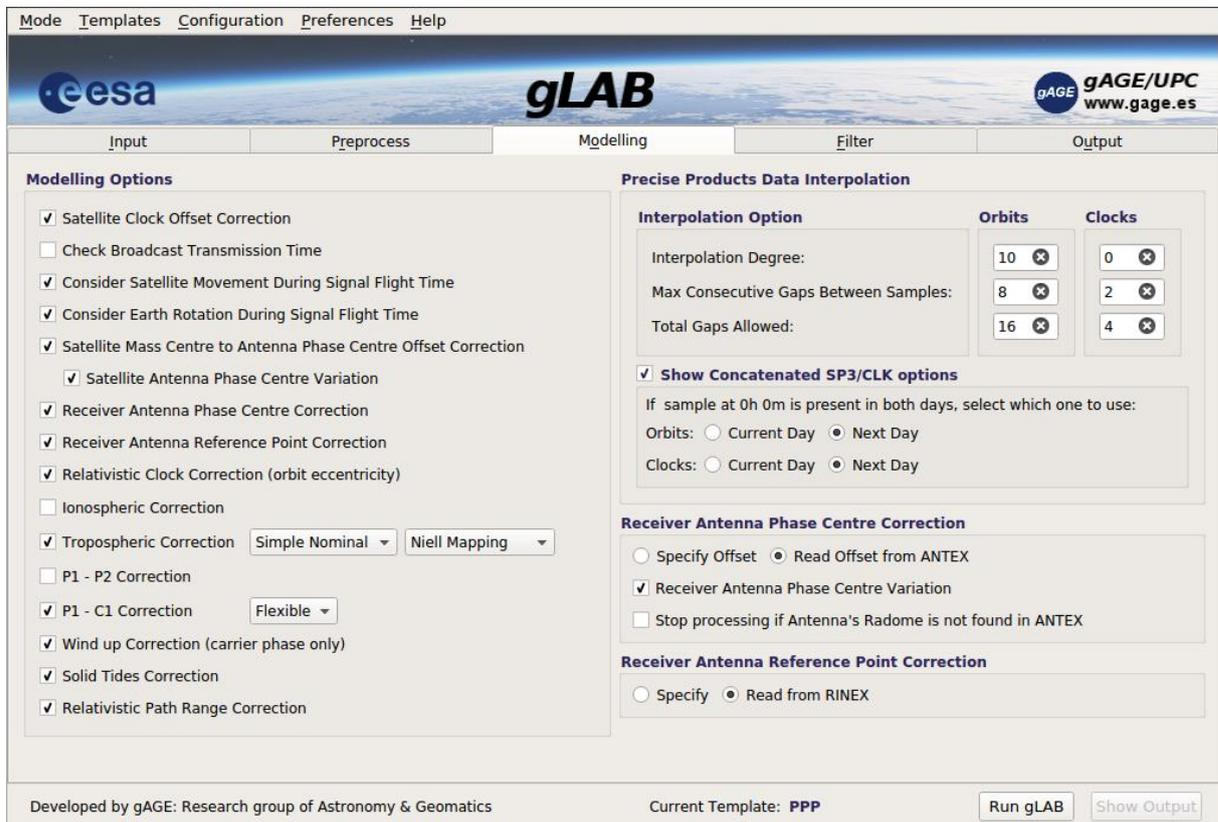


Figure 4-9: Modeling section screenshot

- Modeling Options: The following options allow to enable/disable the different models included in the processing.
 - Satellite clock offset correction: The satellite clock errors correspond to the clock synchronism errors of the satellite clocks in relation to the GNSS system time scale. These errors depend heavily on the type of oscillator of the satellite and are quite unpredictable. They can only be obtained by some kind of estimation. The typical source for estimations of these errors are the own navigation message, or some kind of external estimation, such as SP3 files. The effect of these clock errors can reach up hundreds of kilometers.
 - Consider satellite movement during signal flight time: Due to the distance between satellites and receivers (between 20000 and 26000 Km for GPS), the signal travel time is not despicable (about 70 ms for GPS). Thence the receiver is obtaining the measurement after it has been emitted by the satellite. This fact should be taken into consideration, as the position of the satellite must be computed in the transmission time, not in the reception time. This effect can impact on the measurements up to hundreds of meters.

- Consider Earth rotation during signal flight time: Besides the satellite movement during signal flight time, the Earth also moves [rotates]. If this effect is not taken into consideration, an error of about 30 m in the east direction would be seen.
- Satellite mass center to antenna phase center correction: Each data source of satellite orbits (in general the navigation message or an SP3 file) provides these orbits in its specific reference. In particular, the SP3 files provide the positions of the satellite referred to its mass center (which is different than the antenna phase centers). In order to properly correct the GNSS measurements with the satellite position, a correction between these two centers must be done. Usually these corrections can be obtained from an ANTEX file. This error can be up to 1-2 m. The positions computed from the navigation message do not require any additional corrections, as they are referred to the antenna phase center.
- Receiver antenna phase center correction: Normally the positions of the stations are given in relation to the base of the station. The difference between this point and the antenna phase center should be taken into account. This effect depends on the frequency, and can reach up to some decimetres.
- Receiver antenna reference point correction: Additionally to the Antenna Phase Center, the position of a station can be given in relation to a specific point (such as a geodetically positioned point in the ground). This correction allows to give a specific correction to the position in North/East/Up components.
- Relativistic clock correction: The rate of advance of two identical clocks, one placed in the satellite and the other on the terrestrial surface, will differ due to the difference of the gravitational potential (general relativity) and to the relative speed between them (special relativity). The special relativity difference can be broken into (Hofmann-Wellenhof): 1) A constant component that only depends on the nominal value of the semi-major axis of the satellite orbit, which is adjusted modifying the clock oscillating frequency of the satellite. 2) A periodical component due to the orbit eccentricity (that must be adjusted by the user receiver) equal to:

$$rel = 2*(r \cdot v)/c$$

This effect can reach up to 13 m.

- Ionospheric correction: The ionosphere is the zone of the terrestrial atmosphere that extends itself from about 60 km until more than 2000 km high. Due to the interaction with free electrons, electromagnetic signals that go through it suffer a delay/advancement in relation to the propagation in a vacuum. This effect is a dispersive effect (frequency dependent), and can be removed in multi-frequency receivers (with a specific combination of measurements). The ionosphere is hard to model, and the Klobuchar model (the one defined in the GPS/SPS-SS [RD-14] and available in the navigation message) can only reduce its impact between a 50% and a 60%. The ionosphere effect can reach up to 50 m in turbulent ionospheric environments. In the current update, the ionospheric correction of NeQuick, SBAS and IONEX are implemented.
- Tropospheric correction: At the frequency which the GPS signal is emitted, the troposphere behaves like a non dispersive media, being its effect independent

of the frequency. The tropospheric delay can be modelled in an approximate way (approximately about 90%-95%) using the following expression:

$$T = d_{\text{dry}} \cdot m_{\text{dry}}(e/ev) + d_{\text{wet}} \cdot m_{\text{wet}}(e/ev)$$

where d_{dry} corresponds to the vertical delay due to the dry component of the troposphere and d_{wet} corresponds to the vertical delay associated with the wet component (due to the water vapor of the atmosphere). These two different nominals can be computed as

- Using a simple nominal described in GIPSY-OASIS [RD-7]:

$$d_{\text{dry}} = 2.3 \exp(-0.116 \cdot 10^{-3} \cdot H)$$

$$d_{\text{wet}} = 0.1$$

where H is the height over the ellipsoid.

- Computing a nominal from the receiver's height and estimates of five meteorological parameters: pressure, temperature, water vapour pressure, temperature lapse rate and water vapour lapse rate. It is adopted by SBAS systems (AD-07).

Finally $m_{\text{dry}}(\text{elev})$ and $m_{\text{wet}}(\text{elev})$ are the slant factors in order to project the vertical delay in the direction of the satellite observation for the dry and wet components. Two models can be chosen to compute these $m(\text{elev})$:

- A simple mapping model (used in SBAS [RD-9]). This mapping only depends on satellite elevation and it is common for wet and dry components.
- The more refined Niell mapping model [RD-8]. This mapping considers different obliquity factors for the wet and dry components.

The main part of the troposphere which has not been properly modelled (about 10%) corresponds mainly to the wet component. The total effect of troposphere can range up to 10 m.

- P1 – P2 correction: Differential Code Biases (DCB) are the delays due to electronic, antennas and cables of receiver and transmitter devices which directly affect the measurements with a bias. This effect depends on the frequency and can be corrected using the information extracted from:
 - The RINEX Navigation file, where the (P2-P1) bias are given as the Total Group Delay (TGD).
 - Precise .DCB files, where the International GNSS Service (IGS) gives an accurate estimation of the (P1-P2) bias. This file contains a monthly estimation of this bias for all Satellites
- P1 – C1 DCB correction: Differential Code Biases (DCB) are the delays due to electronic, antennas and cables of receiver and transmitter devices which directly affect the measurements with a bias. Because the code generation depends on the Receiver Type, this receiver-related information has to be given together with the corrections. gLAB works in two different modes:

- Flexible: gLAB will use whichever C1 or P1 measurement is available in the receiver, without correcting DCB. If both code measures are available, P1 will be used as default. Used when receiver provides C1 but P1 is missing (or viceversa).
- Strict: gLAB Data Processing Core (DPC) stops if both files are not provided:
 - Receiver Type File: To identify how codes are generated in the receiver, and how to remove these C1-P1 biases.
 - P1-C1 DCB File : Containing the P1-C1 DCB corrections.
- Wind up correction (Carrier phase only): The wind up only appears in carrier phase measurements and is due to the rotation of the Line-of-sight vector in relation to the antenna. The wind-up has an accumulative effect, and for fixed antennas can reach up to half the wave length of the measurement.
- Solid tides correction: The attraction of Sun and Moon and the inelasticity of the Earth's mantle cause variations to the positions of ground receivers. This effect can reach up to some decimetres (the model used is described in [RD-10], and is implemented up to degree 3).
- Relativistic path range correction: As introduced in the *Relativistic clock correction* section, the difference of the gravitational potential (general relativity) affects the measurement. This is a small effect that has elevation dependence, and has a total effect of about 4 cm.
- Precise Products Data Interpolation: This is the degree of the interpolation polynomial for the precise orbit and clocks (this option has no effect when using broadcasted products).
 - Orbit Interpolation Degree: By default, the interpolation is done with a polynomial of degree 9, but this value can be adjusted with this parameter. Excessively low values would strongly affect the precision of the position obtained.
 - Clock Interpolation Degree: By default, no interpolation is done ("degree" 0), but you can chose to activate the interpolation by providing a number different than 0. Due to the unpredictability of clocks, and its non-smoothed nature, the interpolation of low sampling rate clocks (i.e., $t > 30$ secs) would strongly affect the precision of the clocks obtained. Only clocks with sampling rate higher than 1/30s should be interpolated with a polynomial of degree 1.
- Receiver Antenna Phase Center:
 - Specify: Specify in North/East/Up components the receiver antenna phase center. Different values can be specified for different frequencies.
 - F1/F2: Frequency selector.
 - North/East/Up [m]: Each of the components expressed in meters.
 - Read from ANTEX: Read the Phase Center data of the receiver from the ANTEX file specified in the Input section. It tries to obtain the name of the

antenna using the RINEX header record *ANT #/TYPE*, and seeks for that name in the ANTEX file.

- Receiver Antenna Reference Point:
 - Specify: Specify in North/East/Up components the receiver Antenna Reference Point.
 - Read from RINEX: Read the receiver Antenna Reference Point from the RINEX file. It seeks for the *ANTENNA: DELTA H/E/N* RINEX header record.

4.2.4 Filter

This section provides all the configuration options to specify the behaviour of the Kalman Filter. In particular, the selection of measurement and the parameters to be estimated can be chosen in this section. Figure 4-10 shows a screenshot of the FILTER section.

The screenshot shows the 'Filter' section of the gLAB software. The interface is divided into several panels:

- Measurements:**
 - Selection:** Radio buttons for 'Pseudorange' (selected) and 'Pseudorange + Carrier phase'.
 - Smoothing:** A checkbox for 'Pseudorange Smoothing'.
 - Measurement Configuration and Noise:** A dropdown menu set to 'C1C', radio buttons for 'Fixed StdDev' (selected) and 'Elevation StdDev', and a text input field set to '1' with a unit '(m)'.
- Parameters:** A table for parameter estimation:

	Phi	Q	Po
Coordinates	0	1e8 (m ²)	1e8 (m ²)
Receiver Clock	0	9e10 (m ²)	9e10 (m ²)
- DOP Filters:** Three checkboxes: 'Max. HDOP', 'Max. PDOP', and 'Max. GDOP'.
- Available Frequencies:** Radio buttons for 'Single-frequency' (selected) and 'Dual-frequency'.
- Troposphere:** A checkbox for 'Estimate wet troposphere residual'.
- Ionosphere:** A checked checkbox for 'Use Sigma Ionosphere'.
- Receiver Kinematics:** Radio buttons for 'Static' and 'Kinematic' (selected).
- Other Options:** Checkboxes for 'Backward Filtering', 'Prefit Outlier Detector', and 'Threshold (m)'.

At the bottom, it says 'Developed by gAGE: Research group of Astronomy & Geomatics', 'Current Template: SPP', and buttons for 'Run gLAB' and 'Show Output'.

Figure 4-10: Filter section screenshot

- Estimate wet troposphere residual: Activates the estimation of the wet troposphere residual. This estimation tries to remove the part of the wet troposphere delay not removed by the nominal modeling (see

Modelling section). The estimation depends on the model chosen to compute the $m_{\text{wet}}(e/lev)$ function (Niell mapping should be used for more realistic results).

IMPORTANT: Reliable troposphere estimation can only be obtained following options:

Navigation Mode: PPP Template

Measurements: Pseudorange + Carrier phase

Available frequencies: Dual Frequency

Outside this specific case, the troposphere estimation should be disabled.

- Available Frequencies: Select which frequencies are available.
 - Single Frequency: Use this option to force the receiver to be understood as a single-frequency one. Discarding all the measurements in the F2. For conditions with the rest of the values of this window, see *SPP/PPP Navigation Mode Templates*.
 - Dual Frequency: Use this option to have the measurements for both frequencies (F1 and F2) available. For conditions with the rest of the values of this window, see *SPP/PPP Navigation Mode Templates* tooltips.
- Receiver Kinematics: Select which is the supposed movement of the receiver.
 - Static: Select this option to do a processing supposing that the receiver is static. This modifies the filter parameters **Phi** (propagation) and **Q** (process noise) for the positions to: **Phi** = 1 and **Q** = 0.
 - Kinematic: Select this option to do a processing supposing that the receiver is in movement. This modifies the filter parameters **Phi** (propagation) and **Q** (process noise) for the positions to: **Phi** = 0 and **Q** = inf.
- Measurement configuration and noise: Section to specify the input measurements used in the filter, and its corresponding standard deviation noise (to be used for the filter weights).
 - Selection:
 - Pseudorange: Use only pseudorange measurements for the processing. The ambiguity estimation in the filter will be disconnected with this option set. For conditions with the rest of the values of this window, see *SPP/PPP Navigation Mode Templates*.
 - Pseudorange + Carrier phase: Use both pseudorange and carrier phase measurements for the processing. For conditions with the rest of the values of this window, see *SPP/PPP Navigation Mode Templates*.
 - Pseudorange smoothing [epochs]: Use the Hatch filter to smooth the pseudorange measurements with carrier phase one. This option will reduce the noise of the measurements included in the filter. This should only be activated when processing with pseudorange only (no carrier phase), as the carrier phase is better included in the filter in that other way better than using smoothing. The use of smoothing allows to enhance the pseudorange without the cost of the increased filter complexity for carrier phase ambiguities estimations. The Hatch filter is defined as:

$$P_{i,\text{smoothed}} = \text{mean}(P-L)_i + L_i$$

Being the mean() a function that computes the mean of pseudorange and carrier phase measurements. This mean at epoch i is obtained:

$$\text{mean}(P-L)_i = ((n-1) * \text{mean}(P-L)_{i-1} + (P-L)_i) / n$$

being n the arc length at epoch i limited to a maximum value. This limitation is to reduce the effect of the ionospheric divergence between pseudorange and carrier phase measurements. If both measurements

do not have ionospheric divergence (i.e. P_c and L_c), the parameter can be as high as desired.

- Configuration.
 - [Grayed option]: Selected measurements for the filter.
 - Fixed stdDev [m]: This sets the standard deviation of the corresponding measurement to be used as weight in the filter. The weight is computed as:

$$W = 1/(\text{stdDev})^2$$

- Elevation stdDev: This sets the standard deviation of the corresponding measurement to be used as weight in the filter as a function of the elevation. The standard deviation is computed as:

$$\text{stdDev} = \mathbf{a} + \mathbf{b} \cdot e^{(\text{elev}/\mathbf{c})}$$

Being \mathbf{a} , \mathbf{b} and \mathbf{c} the three parameters, and $elev$ the elevation in degrees of the satellite. The filter weight is finally computed as:

$$W = 1/(\text{stdDev})^2$$

- Parameters:
 - **Phi:** **Phi** sets the propagation of parameters between epochs (transition state matrix). '1' means that the value estimated in the epoch $i+1$ is used as apriori value in the epoch i , '0', means that the apriori value is always '0'.
 - **Q:** The process noise parameter (**Q**) sets the stability of a parameter along time. The process noise is included after the estimation when propagating the parameters to the next epoch, and is an increase in the covariance of the parameter. A process noise of '0' means that the parameter is a constant.
 - **P₀:** The Kalman filter requires initial values for all its parameters:
 - Position:* The *Apriori receiver position* in the Input section is used.
 - Clock:* A '0' value is assigned due to its high variability.
 - Troposphere:* Due to the fact that about 90% of the troposphere is corrected by a proper modeling, and only about a 10% has to be estimated (and is usually around 10 cm), a '0' value is used for apriori.
 - Carrier phase ambiguities:* As carrier phase is prealigned with code, the ambiguities are not far from '0', thence this value is used as apriori.

The parameter \mathbf{P}_0 sets the initial uncertainty of these apriori values.

- **Position:** This comprises the 3 parameters with the 3D position [XYZ] of the receiver. Typical values:
 - Apriori value:* Apriori receiver position, configured in Input section.
 - Phi:* '1' [Static positioning], '0' [Kinematic positioning].
 - Process noise:* '0' [Static positioning], 'inf' [Kinematic positioning].

Initial covariance: 'inf' (A smaller value for the initial covariance will increase the convergence time, but would require a good initial position).

- **Receiver Clock:** This parameter is the receiver clock synchronism error referring to GPS time scale. Typical values:

Apriori value: '0'.

Phi: '0'.

Process noise: 'inf'.

Initial covariance: 'inf'.

- **Troposphere:** This parameter estimates part of the troposphere not taken into account in the nominal model (see Modeling section). This 10% is mostly associated with the wet component of the troposphere, which is due to the water vapor of the atmosphere. The mapping $m_{\text{wet}}(e/lev)$ function described in the Modeling section is used in the troposphere estimation. Typical values:

Apriori value: '0'.

Phi: '1'.

Process noise: '1e-4' in units of [m²/h]. Contrary to the rest of parameters, troposphere process noise is given as increase of **Q** per time unit.

Initial covariance: '0.025' (equivalent to 0.5 meters of uncertainty).

- **Phase ambiguities:** Carrier phase ambiguities are the parameters which estimates the ambiguities of the carrier phase measurements (or combinations) used in the filter. Each epoch, there is one parameter for each satellite. Additionally, when a cycle-slip is detected, the carrier phase ambiguity is reset (by providing a new initial value and covariance). Typical values:

Phi: '1'

Process noise: '0'.

Initial covariance: '400' (equivalent to 20 meters in relation to the pseudorange measurement used to prealign the carrier phase).

- DOP Filters:

- **Max. HDOP:** Set the maximum value for the HDOP (Horizontal Dilution of Precision) factor. The HDOP factor is an approximate ratio factor between the precision in the measurements due to satellites geometry (in respect to the user) and the precision in the horizontal positioning. A very high HDOP will mean that the solution will have a great error, so it is better to skip the epoch. In gLAB, the HDOP is computed before entering the filter, so if HDOP is greater than the exceeds the maximum value, the following actions will be done:

- In SPP or PPP modes, the epoch will be skipped.

- In SBAS mode, if GEO or SBAS navigation mode switching are enabled, a GEO or SBAS navigation mode switching will be done. If the HDOP after doing the switch is under the maximum, the navigation solution is computed. Else, the epoch is skipped.
- In DGNSS mode, navigation mode will be switched to SPP. If HDOP in SPP is under the maximum, the navigation solution is computed in SPP mode. Else, the epoch is skipped.

NOTE: If an epoch is skipped due to high threshold, an INFO message will be shown.

- **Max. PDOP:** Set the maximum value for the PDOP (Position Dilution of Precision) factor. The PDOP factor is an approximate ratio factor between the precision in the measurements due to satellites geometry (in respect to the user) and the precision in the positioning. A very high PDOP will mean that the solution will have a great error, so it is better to skip the epoch. In gLAB, the PDOP is computed before entering the filter, so if PDOP is greater than the exceeds the maximum value, the following actions will be done:
 - In SPP or PPP modes, the epoch will be skipped.
 - In SBAS mode, if GEO or SBAS navigation mode switching are enabled, a GEO or SBAS navigation mode switching will be done. If the PDOP after doing the switch is under the maximum, the navigation solution is computed. Else, the epoch is skipped.
 - In DGNSS mode, navigation mode will be switched to SPP. If PDOP in SPP is under the maximum, the navigation solution is computed in SPP mode. Else, the epoch is skipped.

NOTE: If an epoch is skipped due to high threshold, an INFO message will be shown.

- **Max. GDOP:** Set the maximum value (in metres) for the GDOP (Geometry Dilution of Precision) factor. The GDOP factor is an approximate ratio factor between the precision in the measurements due to satellites geometry (in respect to the user) and the precision in the positioning and timing (receiver clock estimation). A very high GDOP will mean that the solution will have a great error, so it is better to skip the epoch. In gLAB, the GDOP is computed before entering the filter, so if GDOP is greater than the exceeds the maximum value, the following actions will be done:
 - In SPP or PPP modes, the epoch will be skipped.
 - In SBAS mode, if GEO or SBAS navigation mode switching are enabled, a GEO or SBAS navigation mode switching will be done. If the GDOP

after doing the switch is under the maximum, the navigation solution is computed. Else, the epoch is skipped.

- In DGNSS mode, navigation mode will be switched to SPP. If GDOP in SPP is under the maximum, the navigation solution is computed in SPP mode. Else, the epoch is skipped.

NOTE: If an epoch is skipped due to high threshold, an INFO message will be shown.

- Other options:
 - Backward filtering. This kind of processing reverses the input observation RINEX file when it reaches the end of the file, and processes it backwards. This is also called smoothing and it allows to have good estimation of the parameters (such as the troposphere, and the position in a kinematic receiver) in the beginning of the file, what would be the convergence period.
 - Prefit Outlier Detector: Sometimes, for some satellites (typically the ones with very low elevation or not a clear line of sight), the pseudorange measurements written in the RINEX observation file can be with a great amount of bias (sometimes of than a hundred metres). This biased measurements can last for a noticeable amount of time (more than 6 minutes), and during this period of time they are consistent (so no cycle-slip is detected), and therefore are eligible to be used in the filter, therefore introducing an important error in the navigation solution.

A method to detect this cases is comparing the prefits (the measured pseudorange minus the modelled pseudorange). The prefits for all satellites should be very similar between them (typically less than 10 metres of difference for fixed receivers), so if a satellite has a prefit value much more different than the rest, then that satellite should be discarded.

In gLAB, it is implemented with the following algorithm:

- 1. Compute the median of all prefits.
- 2. For each satellite:
 - 2a. Compute the absolute value of the difference between the satellite's prefit and the median.
 - 2b. If the difference is higher than the threshold, unselect the satellite.

NOTES:

If the number of discarded satellites is more than half of the initially available satellites, then no satellites will be discarded at all. This last check is to account for receivers in movement and for receiver solution convergence time, which in both cases will produce satellite prefits very different from each other.

The prefit outlier detector threshold only works with pseudorange measurements, as carrier phase measurements will have very different prefit values due to the ambiguities.

If the computed navigation solution error is very high, enabling this option may fix it (this option is not enabled by default due to it would interfere with the gLAB GNSS courses).

4.2.5 Output

This section provides all the configuration options to select which messages are output. Figure 4-11 shows a screenshot of the OUTPUT section.

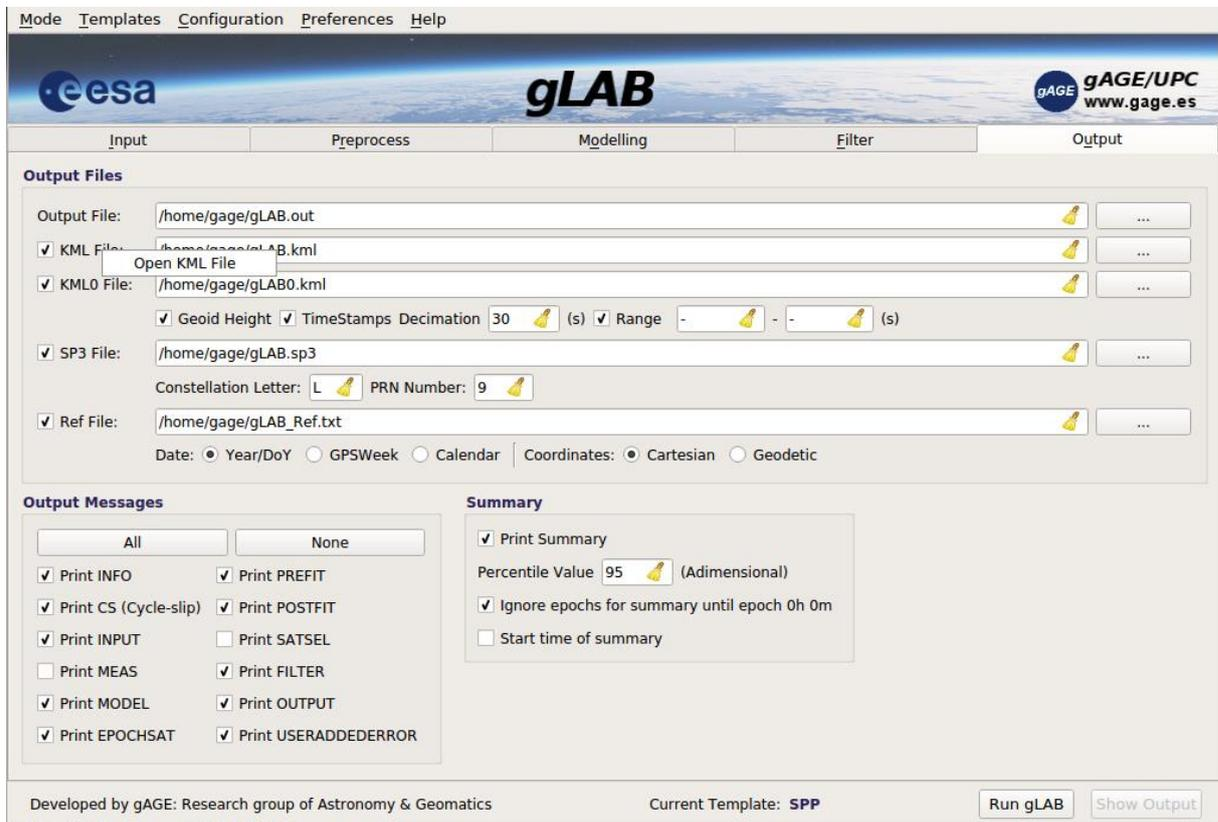


Figure 4-11: Output section screenshot

- Output Destination:
 - Sets the output file where all messages will be written. If a right click is done in the “Output File” text, a menu appears with an option to open the selected file.
 - KML File: set the output KML file which will be generated with gLAB's solution at the same rate as the Data Decimation parameter in the PREPROCESS section. Optionally, it can apply EGM96 geoid height model, and it may include also timestamps. If a right click is done in the “KML File” text, a menu appears with an option to open the selected file.
 - KML0 File: Same as KML file, but projected to the ground (i.e. the height will be 0). The same options for a KML file are applied to the KML0 file. If a right click is done in the “KML0 File” text, a menu appears with an option to open the selected file (see figure 4-11).
 - SP3 File: Set the output SP3 file which will be generated with gLAB's solution. The SP3 will include the computed coordinates and receiver clock at the same

rate as the Data Decimation parameter in the PREPROCESS section. If a right click is done in the “SP3 File” text, a menu appears with an option to open the selected file.

- Ref File: A text file containing only the solution. This file is useful for using it as a reference position for another processing (e.g compute a PPP solution and use to compare it with a SPP solution). The timestamps can be in Year/DoY/SoD, GPSWeek/SoW or calendar format, and the coordinates can be in XYZ or Geodetic formats.
- Messages: Individually select which messages are printed.
 - Print INFO Messages: INFO messages are shown at several points in the program and provide information on the program configuration, events and problems it may encounter, which are:
 - At the start of the file, information about gLAB configuration.
 - An inconsistent clock update on the receiver.
 - A data gap in the RINEX observation file.
 - A change in the a priori receiver coordinates (only when receiver coordinates are computed by gLAB).
 - The new position to be used from the reference position file (only when a reference file is provided).
 - No solution was computed, along with the reason for not being able to compute the solution (not enough satellites available, singular geometry matrix or GDOP too high).
 - In SBAS processing, a GEO or mode switch.
 - In DGNSS processing, a switch from DGNSS to SPP solution mode.
 - In DGNSS processing, a data gap in the reference station RINEX observation file.
 - Print CS (Cycle-Slip) Messages: Cycle-slip message information. It is shown when a cycle-slip is found by any detector. A line will be printed for each CS detector that has found a CS. The first 6 fields are common, afterwards, there are five possible different CS messages depending on the cycle-slip detector activated.
 - Field 1: 'CS' or 'CS_USER' for Rover Station (user)
 - Field 1: 'CS_REF' for Reference Station
 - Field 2: Year
 - Field 3: Doy
 - Field 4: Seconds of day
 - Field 5: GNSS System (GPS, GAL, GLO or GEO)

Field 6: PRN satellite identifier

If cycle-slip detector is Data gap:

Field 7: 'DATA_GAP'

Field 8: '='

Field 9: Delta time between usable epochs

Field 10: 'THRESHOLD'

Field 11: '='

Field 12: Data gap threshold

Sample CS 2014 288 44997.00 GPS 32 DATA_GAP = 45.000000
THRESHOLD = 40.000000

If cycle-slip detector is Loss of Lock Indicator:

Field 7: 'LLI'

Sample: CS 2014 288 44942.00 GPS 32 LLI

If cycle-slip detector is Geometry-free carrier phase:

Field 7: 'LI'

Field 8: '='

Field 9: LI value

Field 10: 'THRESHOLD'

Field 11: '='

Field 12: LI threshold

Sample: CS 2014 288 42092.00 GPS 7 LI = 0.119386 THRESHOLD =
0.052861

If cycle-slip detector is Melbourne-Wubben:

Field 7: 'LI'

Field 8: '='

Field 9: Bw value

Field 10: 'THRESHOLD'

Field 11: '='

Field 12: Bw threshold

Sample: CS 2014 288 42092.00 GPS 7 Bw = 1.992188 THRESHOLD =
1.839927

If cycle-slip detector is L1-C1 difference:

Field 7: 'LI'

Field 8: '='

Field 9: L1C1 value

Field 10: 'THRESHOLD'

Field 11: '='

Field 12: L1C1 threshold

Sample: CS 2014 365 55344.00 GPS 7 L1C1 = 747.078356 THRESHOLD = 0.876845

- Print INPUT Messages: Input data message. It is shown after an epoch is read, decimated and added user-defined error. It contains the measurements for each satellite for this epoch³.

Field 1: 'INPUT'

Field 2: Year

Field 3: Day

Field 4: Seconds of day

Field 5: GNSS System (GPS, GAL, GLO or GEO)

Field 6: PRN satellite identifier

Field 7: Arc length (number of undecimated epochs after the last cycle-slip)

For GPS:

Field 8: C1 [C1C]

Field 9: P1 [C1P]

Field 10: P2 [C2P]

Field 11: L1 [L1P] (prealigned, in metres)

Field 12: L2 [L2P] (prealigned, in metres)

For Galileo (GAL):

Field 8: C1A

Field 9: C1B

Field 10: C1C

Field 11: C7Q

Field 12: C8Q

Field 13: L1A (prealigned, in metres)

Field 14: L1B (prealigned, in metres)

³ These measurements are the ones that are shown in the INPUT message. Nevertheless all the measurements included in the RINEX are read and stored by gLAB for its later use, in case of need, even if they are not printed in the INPUT message.

Field 15: L1C (prealigned, in metres)

Field 16: L7Q (prealigned, in metres)

Field 17: L8Q (prealigned, in metres)

For GLONASS (GLO):

Field 8: C1 [C1C]

Field 9: C2 [C2C]

Field 10: L1 [L1P](prealigned, in metres)

Field 11: L2 [L2P](prealigned, in metres)

For GEO:

Field 8: C1 [C1C]

```

Sample: INPUT      2006 200      0.00 GPS 19      1 23119003.9020
23119002.6110 23119004.0750 23119002.7507 23119004.0925
  
```

- Print MEAS Messages: Information of the input measurements in a variable format, and azimuth/elevation of the satellite. It is written after modelling the message.

Field 1: 'MEAS'

Field 2: Year

Field 3: Doy

Field 4: Seconds of day

Field 5: GNSS System (GPS, GAL, GLO or GEO)

Field 6: PRN satellite identifier

Field 7: Elevation of the satellite [degrees]

Field 8: Azimuth of the satellite [degrees]

Field 9: Number of measurements

Field 10: List of measurements included

Field 11-: Each following column is the value of the measurement specified in Field 10

If there is no data available on azimuth and elevation, the fields 7 and 8 will be fixed to zero.

```

Sample: MEAS      2006 200      0.00 GPS 19      26.66 -79.62 6
C1C:L1C:C1P:L1P:C2P:L2P 23119003.9020      0.0000 23119002.6110
23119002.7507 23119004.0750 23119004.0925
  
```

- Print MODEL Messages: Model break down message. It is shown when a model can be fully computed for each measurement.

Field 1: 'MODEL' (if the satellite is used in the computation) or 'MODEL*' (if it is not)

- Field 2: Year
- Field 3: Doy
- Field 4: Seconds of day
- Field 5: GNSS System (GPS, GAL, GLO or GEO)
- Field 6: PRN satellite identifier
- Field 7: Measurement identifier (as string)
- Field 8: Signal flight time [sec]
- Field 9: Measured value [m]
- Field 10: Full model value [m]
- Field 11: Satellite X position [m]
- Field 12: Satellite Y position [m]
- Field 13: Satellite Z position [m]
- Field 14: Satellite X velocity [m]
- Field 15: Satellite Y velocity [m]
- Field 16: Satellite Z velocity [m]
- Field 17: Satellite-receiver geometric distance [m]
- Field 18: Satellite clock correction [m]
- Field 19: Satellite phase centre projection [m]
- Field 20: Receiver phase centre projection [m]
- Field 21: Receiver Antenna Reference Point (ARP) projection [m]
- Field 22: Relativity correction [m]
- Field 23: Wind-up correction [m] (for carrier phase measurements)
- Field 24: Troposphere nominal correction [m]
- Field 25: Ionosphere correction [m]
- Field 26: Gravitational delay correction [m]
- Field 27: Total Group Delay (TGD) correction [m]
- Field 28: Solid tides correction [m]
- Field 29: Satellite elevation [degrees]
- Field 30: Satellite azimuth [degrees]
- Field 31: Satellite SNR (Signal to Noise Ratio) [dbHz]

The satellite coordinates (fields 11-16) are given in the transmission epoch if the model of the signal transmission time is enabled (if it is disabled, they are given in the reception time). The coordinates are relative to the antenna phase centre or satellite mass centre, depending on the products input:

- Broadcast: Antenna Phase Centre
- Precise: Satellite Mass Centre

Field 9 is the direct measurement (as in the RINEX file), but scaled to metres for carrier phase measurements. Field 10 is the model computed for this measurement. Field 10 is the direct sum of fields 17 to 28. When the '*' appears in field 1, it is due to smoothed code of the satellite has not reached steady-state, a SBAS processing mode switch or SBAS GEO switch. When a mode or GEO switch occurs, the SBAS corrections have to be computed again.

```

Sample: MODEL 2006 200 0.00 GPS 19 L1P 0.07712 23119002.7507
23119008.7501 8811456.7780 -21033910.1687 13675922.8867
1828.7339 2353.7679 2467.3576 23119457.7652 -456.31787 0.00000
-0.04936 -0.01140 2.32333 0.10671 4.85412 -0.00000 0.01544 0.00000
0.06394 9.164 79.274
  
```

- Print EPOCHSAT Messages: Message with the satellites used to compute the solution. It is shown when the filter is run, and is given for each measurement.

Field 1: 'EPOCHSAT'

Field 2: Year

Field 3: Doy

Field 4: Seconds of day

Field 5: Measurement identifier (as string)

Field 6: Number of satellites used in solution computation

Field 7-: Each following column is the identifier of a satellite

```

Sample: EPOCHSAT 2006 200 300.00 PC 7 15 3 19 16 18 21 22
  
```

- Print SATSEL Messages: Message with debug information of the reason why a satellite has been discarded (or selected) for processing.

Field 1: 'SATSEL' (if navigation solution will be computed), 'SATSEL*' (if model parameters will be recomputed before the navigation solution, only in SBAS mode)

Field 2: Year

Field 3: Doy

Field 4: Seconds of day

Field 5: GNSS System (GPS, GAL, GLO or GEO)

Field 6: PRN satellite identifier

Field 7: 'selected' if satellite is used or 'discarded:' if satellite is not used

Field 8: Discard reason if satellite is not used

```

Sample: SATSEL 2006 200 0.00 GPS 7 discarded: Elevation too low ( 3.04
)
  
```

The possible values for field 8 are:

- Arc too short (<arclength>)
- Pre-Check; measurements missing for CS detection
- Not enough consecutive samples (current <value>, minimum <value>)
- Unconsistency of measurements
- Outlier in LI detector
- Outlier in Bw detector
- Cycle-slip
- Measurement unavailable (<meas>)
- Deselection forced
- SNR too low (<value>)
- Steady-state operation not reached. <value> epochs passed, still <value> epochs to achieve <value>
- No code measurement available
- C1C measurement unavailable
- Ephemerides unavailable
- Satellite phase center corrections unavailable
- DCBs unavailable (strict TGD treatment)
- SBAS corrections unavailable
- Elevation too low (<value>)
- Satellite under eclipse
- Satellite was under eclipse <value> seconds ago
- URA value (<value>) is equal or greater than the threshold (<threshold>)
- Missing IONEX data
- Missing FPPP data
- SBAS iono unavailable
- STEP detected (jump of <value> greater than <threshold>)
- Prefit too high in comparison with other satellites
- Prefit too high in comparison with other satellites (threshold <threshold> metres)
- Prefit too different (<value>) with respect to the prefit median (<median>), threshold <threshold> metres
- No DGNSS corrections
- No DGNSS corrections: Time out

- No DGNSS corrections: Excluded during the smoother conversion in the Reference Station
- No DGNSS corrections: IODE from BRDC and RTCM do not match
- No DGNSS corrections: Excluded due to differential correction is too large
- Invalid GNSS System: <system>
- Print PREFIT Messages: Prefilter values message. It provides the measurement-model values. It is shown in each filter execution.
 - Field 1: 'PREFIT' (if the satellite is used in the computation) or 'PREFIT*' (if it is not)
 - Field 2: Year
 - Field 3: Doy
 - Field 4: Seconds of day
 - Field 5: GNSS System (GPS, GAL, GLO or GEO)
 - Field 6: PRN satellite identifier
 - Field 7: Measurement identifier (as string)
 - Field 8: Measurement-model value (prefit) [m]
 - Field 9: Measurement value [m]
 - Field 10: Model value [m]
 - Field 11: X-partial derivative (-X component of the satellite line-of-sight vector)
 - Field 12: Y-partial derivative (-Y component of the satellite line-of-sight vector)
 - Field 13: Z-partial derivative (-Z component of the satellite line-of-sight vector)
 - Field 14: T-partial derivative
 - Field 15: Elevation of the satellite [degrees]
 - Field 16: Azimuth of the satellite [degrees]
 - Field 17: Standard deviation of the measurement (for the filter) [m]
 - Field 18: Troposphere wet mapping
 - Field 19: Arc number

In general Field 8 = Field 9 - Field 10, but this is no longer true when using smoothing, as the Field 9 is the raw measurement without smoothing, but the Field 8 computation takes smoothing into account.

```

Sample: PREFIT  2006 200  300.00 GPS 19 LC   -7.3029 22982271.7155
22982279.0184 28.28  0.3931 -0.4834  0.7822  1.0000 77.912 130.010
17.883  2
  
```

- Print POSTFIT Messages: Postfilter values message. It provides the corrected prefits with the filter estimation. It is shown in each filter execution.

Field 1: 'POSTFIT'

Field 2: Year

Field 3: Doy

Field 4: Seconds of day

Field 5: GNSS System (GPS, GAL, GLO or GEO)

Field 6: PRN satellite identifier

Field 7: Measurement identifier (as string)

Field 8: Measurement-corrected model value (postfit) [m]

Field 9: Measurement value [m]

Field 10: Corrected model value with the filter estimations[m]

Field 11: Elevation of the satellite [degrees]

Field 12: Azimuth of the satellite [degrees]

Field 13: Only given for carrier phase measurements. It is the estimated carrier phase ambiguity. [m]

As with PREFIT messages, Field 8 is not necessary Field 9 - Field 10 when using smoothing.

```
Sample: POSTFIT 2006 200 300.00 GPS 19 LC 0.0000 22982271.7155  
22982271.7155 77.912 130.010 0.3029
```

- Print FILTER Messages: Filter solution message. This message provides direct information on the filter estimates. It is shown in each filter execution.

Field 1: 'FILTER'

Field 2: Year

Field 3: Doy

Field 4: Seconds of day

Field 5-: Filter estimates. The order is: 3D estimated position, clock, troposphere and ambiguities

The number of fields is variable in this message. With a full filter (troposphere and ambiguities estimation), the fields are as follows:

Field 5: Receiver X position [m]

Field 6: Receiver Y position [m]

Field 7: Receiver Z position [m]

Field 8: Receiver clock [m]

Field 9: Zenith Tropospheric Delay [m]

Field 10: Carrierphase ambiguities [m]

```
Sample: FILTER      2006 200    300.00  4849203.0770  -360328.5730
4114913.9184      -7.4867    2.1946  -0.0001    1.1079   -1.1073
0.3029    0.4555    0.0897    0.0001    0.3845    0.2136
```

- Print OUTPUT Messages: Receiver solution message. This message provides the estimated receiver position. It is shown in each filter execution.

Field 1: 'OUTPUT'

Field 2: Year

Field 3: Doy

Field 4: Seconds of day

Field 5: Square root of the sum of the covariance matrix. This is a measure of the convergence of the filter

Field 6: Receiver X position [m]

Field 7: Receiver Y position [m]

Field 8: Receiver Z position [m]

Field 9: Receiver X position - Nominal a priori X position [m]

Field 10: Receiver Y position - Nominal a priori Y position [m]

Field 11: Receiver Z position - Nominal a priori Z position [m]

Field 12: Receiver X formal error [m]

Field 13: Receiver Y formal error [m]

Field 14: Receiver Z formal error [m]

Field 15: Receiver latitude [degrees]

Field 16: Receiver longitude [degrees]

Field 17: Receiver height [m]

Field 18: Receiver North difference in relation to nominal a priori position [m]

Field 19: Receiver East difference in relation to nominal a priori position [m]

Field 20: Receiver Up difference in relation to nominal a priori position [m]

Field 21: Receiver formal error in North direction [m]

Field 22: Receiver formal error in East direction [m]

Field 23: Receiver formal error in Up direction [m]

Field 24: Geometric Dilution of Precision (GDOP)

Field 25: Positioning Dilution of Precision (PDOP)

Field 26: Time Dilution of Precision (TDOP)

Field 27: Horizontal Dilution of Precision (HDOP)

Field 28: Vertical Dilution of Precision (VDOP)

Field 29: Zenith Tropospheric Delay (including nominal value) [m]

Field 30: Zenith Tropospheric Delay (excluding nominal value) [m]

Field 31: Zenith Tropospheric Delay formal error [m]

Field 32: Number of satellites used in the navigation solution

Field 33: Processing mode indicator

The fields 29, 30 and 31 will be zero if troposphere is not estimated (only estimated in PPP mode)

Processing mode indicator in field 33 may have the following values:

0 -> SPP

1 -> PPP

2 -> SBAS

3 -> DGNSS

The nominal a priori position is a prerequisite of the processing, and can be specified or read from the RINEX input file. See the option '`pre:setrecpos`' in the help ('-help') for more details.

```
Sample: OUTPUT 2006 200 300.00 2.6219 4849203.1236 -360328.5229
4114913.9535 0.7693 0.4145 0.7580 1.9353 0.6998 1.6246
40.429162956 -4.249653155 830.480629026 0.0993 0.4704 1.0522
1.1365 0.6772 2.2637 0.9572 12.2743 5.0975 7.2205 3.5866
3.0880 0.0097 0.4995 6 1
```

Providing a nominal a priori position is optional for the processing, but if it is given, fields 9, 10, 11, 18, 19 and 20 will be related to this a priori position. See the option *A priori Receiver Position* in the INPUT section.

Print INPUT Messages: Input data message. It is shown after an epoch is read, decimated

- Print Summary: Print a statistical summary with the number of epochs processed, the number of epochs without solution and error percentiles (the latter only if receiver position is fixed). See section below.

4.2.6 Summary

The summary has the following fixed format for SPP /PPP:

```
INFO ----- SPP/PPP Summary -----
INFO HDOP Threshold:    4.00
INFO PDOP Threshold:    6.00
INFO GDOP Threshold:   30.00
INFO First epoch of summary: 27/10/2016 00:00:00.00 / 2016 301      0.00 /
1920 345600.00
INFO Last  epoch of summary: 27/10/2016 23:59:59.00 / 2016 301 86399.00 /
1920 431999.00
INFO Total epochs processed: 86293
INFO Total epochs processed with solution: 85932 ( 99.582% )
INFO Total epochs processed with solution and position from reference file:
85932 ( 99.582% )

INFO Total epochs omitted in summary due to no position from reference file:
0 ( 0.000% )
INFO Total epochs skipped due to no position from reference file for
modelling: 0 ( 0.000% )
INFO Total epochs skipped due to less than 4 valid satellites available:
361 ( 0.418% )
INFO Total epochs skipped due to singular geometry matrix: 0 ( 0.000% )
INFO Total epochs skipped due to any DOP exceeding the threshold:      0 (
0.000% )
INFO Total epochs skipped due to HDOP exceeding the threshold:      0 (
0.000% )
INFO Total epochs skipped due to PDOP exceeding the threshold:      0 (
0.000% )
INFO Total epochs skipped due to HDOP and PDOP exceeding the threshold: 0 (
0.000% )
INFO Total epochs skipped due to GDOP exceeding the threshold:      0 (
0.000% )
INFO Total epochs skipped (any reason): 361 ( 0.418% )
INFO Total epochs missing in observation file (during summary period and
not decimated):    1
INFO Total epochs missing in observation file (during summary period and
decimated):        4
INFO Total epochs missing in observation file (during summary period):
5
```

```
INFO Total epochs missing in observation file (all the file):
7
INFO Number of data gaps in observation file (during summary period): 4
INFO Number of data gaps in observation file (all the file): 7
INFO Maximum data gap size in observation file (during summary period): 2
at epoch 26/01/2018 23:50:04.00 / 2018 026 85804.00 / 1985 517804.00
INFO Maximum data gap size in observation file (all the file): 6
at epoch 25/01/2018 23:46:36.00 / 2018 025 85596.00 / 1985 431196.00
INFO PDOP 95 Percentile: 2.33
INFO GDOP 95 Percentile: 2.69
INFO TDOP 95 Percentile: 1.34
INFO HDOP 95 Percentile: 1.30
INFO VDOP 95 Percentile: 1.98
INFO Maximum PDOP 3.04 at epoch 26/01/2018 23:52:30.00 / 2018 026 85950.00
/ 1985 517950.00
INFO Maximum GDOP 3.57 at epoch 26/01/2018 23:52:30.00 / 2018 026 85950.00
/ 1985 517950.00
INFO Maximum TDOP 1.87 at epoch 26/01/2018 23:52:30.00 / 2018 026 85950.00
/ 1985 517950.00
INFO Maximum HDOP 1.60 at epoch 26/01/2018 02:20:30.00 / 2018 026 8430.00
/ 1985 440430.00
INFO Maximum VDOP 2.66 at epoch 26/01/2018 23:52:30.00 / 2018 026 85950.00
/ 1985 517950.00
INFO First epoch of summary for computing percentiles: 27/10/2016
00:00:00.00 / 2016 301 0.00 / 1920 345600.00
INFO Last epoch of summary for computing percentiles: 27/10/2016
23:59:59.00 / 2016 301 86399.00 / 1920 431999.00
INFO Total samples in Stanford-ESA processed: 111056799
INFO Total samples in Stanford-ESA processed with solution: 111056798 (
99.999% )
INFO Total samples in Stanford-ESA skipped due to singular geometry matrix:
1 ( 9.004E-07% )
INFO Horizontal 95 Positioning Error Percentile: 0.80 metres
INFO Vertical 95 Positioning Error Percentile: 1.73 metres
INFO Maximum Horizontal Positioning Error: 4.26 metres at epoch 27/10/2016
17:40:32.00 / 2016 301 63632.00 / 1920 409232.00
INFO Maximum Vertical Positioning Error: 7.53 metres at epoch 27/10/2016
17:40:32.00 / 2016 301 63632.00 / 1920 409232.00
```

```
INFO Station: helg Lon: 7.89309376 Lat: 54.17448223 Height: 48.4689
HPE_Percentile: 95 0.80 VPE_Percentile: 95 1.73 MaxHPE: 0.00 MaxVPE:
0.00 Avail%: 0.000 PDOP_Percentile: 95 2.33 Max_PDOP: 3.04
GDOP_Percentile: 95 2.69 Max_GDOP: 3.57 TDOP_Percentile: 95 1.34
Max_TDOP: 1.87 HDOP_Percentile: 95 1.30 Max_HDOP: 1.60
VDOP_Percentile: 95 1.98 Max_VDOP: 2.66 Epochs_missing_Sum: 5
Epochs_missing_All_file: 13 Num_DataGaps_Sum: 4 Num_DataGaps_All_file:
7 MaxSize_DataGap_Sum: 2 MaxSize_DataGap_All_file: 6
Station_Network_Name: Other
```

NOTES:

- If observation file starts at 22 hours or later, gLAB will automatically assume that all the epochs until the start of the next day (midnight) are for convergence time. During this convergence time, all the epochs computed will not be taken into account for the summary and the Stanford-ESA computation will be skipped. This behaviour can be disabled with the parameter '--summary:waitfordaystart'. If rover position is not provided, the percentile lines will not appear.
- If rover position is not provided, the percentile lines will not appear.
- If user provides a reference file for comparing the solution and if at a certain epoch the reference file position is not available, the epoch will be skipped from the summary.
- If rover position is not provided, the station coordinates will be the solution from the last computed epoch.
- The last line of the summary contains all the values of the previous lines along with the station coordinates.
- The last line is useful for plotting world maps with data from each station.
- Stanford-ESA messages will not appear if Stanford-ESA computation has not been enabled.
- HDOP, PDOP and GDOP threshold messages will not appear if HDOP, PDOP or GDOP thresholds have not been enabled
- The lines referring to a reference file will only appear if a user sets a reference file.

4.3 ANALYSIS (DAT INTERFACE)

The analysis mode allows configuring all the visualization options for the DAT. Figure 4-12 shows a screenshot of the Analysis interface.

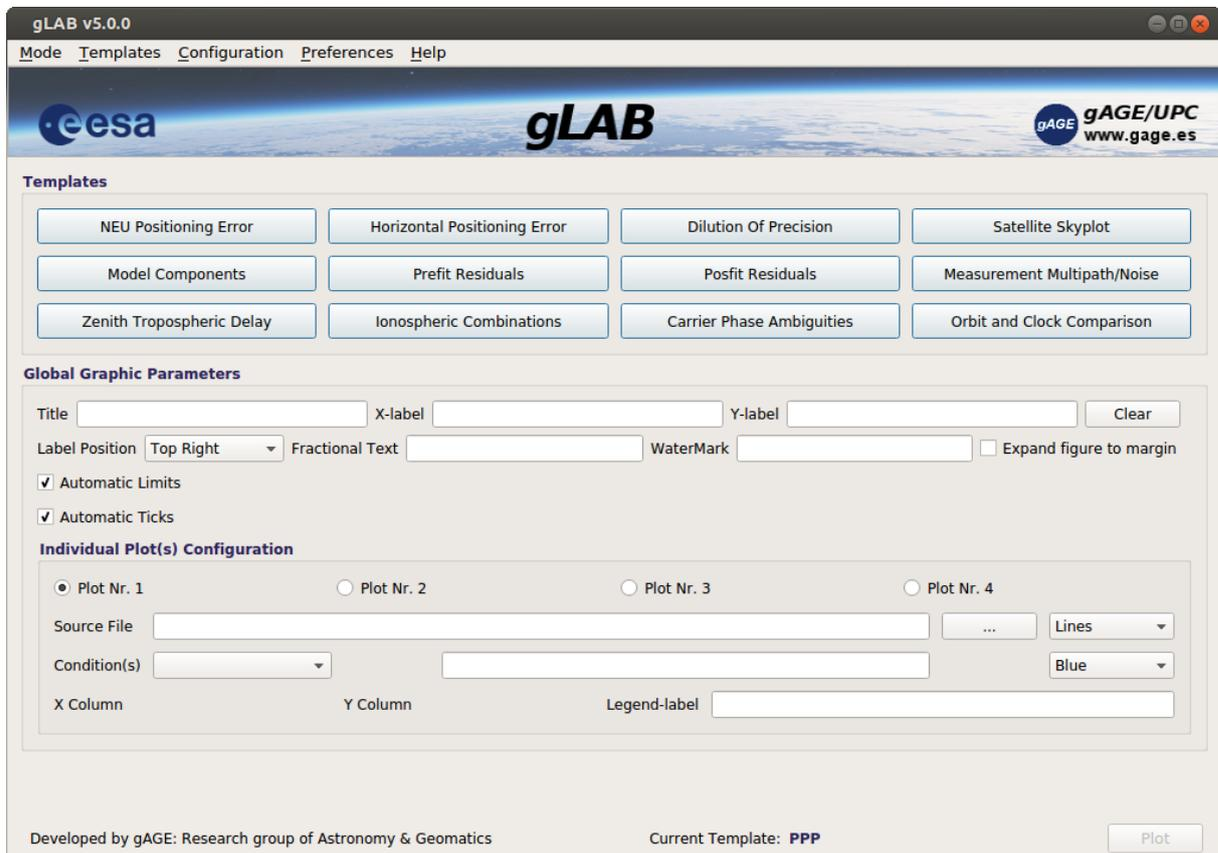


Figure 4-12: Analysis screenshot

- **Templates:** The templates are a set of preconfigured plotting options for the *Graphic Details* section. Clicking on any button will load the options in that section, allowing modifying or plotting them directly.
 - **NEU position error:** The NEU position error template sets the options to print the three components (North, East and Up) of the error of the receiver positioning obtained by the filter. This error is computed by the difference between the direct filter estimation and the Apriori Receiver Position in the Input section of Calculus. Thence to obtain a reliable error estimation, this apriori position should be precise.

If you do not have any precise position of the receiver, you can obtain it by doing a PPP processing (*SP3/Static/Dual frequency/Pseudorange+Carrier phase*). The XYZ position (fields 6 to 8 of OUTPUT message) of the last epoch should have an accuracy in the order of the centimeter, and can be used as a good reference position.

- North-East dispersion: The North-East dispersion template sets the options to print the North vs East position error components. This provides an insight of the horizontal dispersion and bias of the errors.
- Model components: The Model components template sets the options to print a component of the model as a function of time. By default, it selects the Relativity effect, but it can easily be chosen which model to print, by selecting it in the Y Column option.
- Ionospheric combinations: The Ionospheric combinations template sets the options to print the two ionospheric (geometric-free) combinations: P_1 (P2-P1) [pseudorange] and L_1 (L1-L2) [carrier phase].
- Zenith Tropospheric Delay: The Zenith Tropospheric Delay template sets the options to print the tropospheric estimations as a function of time. It includes the nominal part corrected in the modelling and the estimated part computed in the filter.
- Postfit residuals: The Postfit residuals template sets the options to print the filter residuals (postfits) as a function of the satellite elevation. It prints both pseudorange and carrier phase postfits. This plot allows observing the dependence of residuals from elevation. In general, carrier phase residuals will be quite independent from elevation, and pseudorange residuals can have a large dependence on elevation.
- Satellite skyplot: The Satellite skyplot template sets the options to print the elevation/azimuth of the satellites in a skyplot, being the center of the plot the zenith of the satellite, and the extremes, the lower elevations. This is a special plot which makes use of sin and cos in the X column and Y column to obtain a polar plot.
- Carrier phase ambiguities: The Carrier phase ambiguities template sets the options to print the estimation of carrier phase measurements in the filter. This is only possible in a processing with the *Pseudorange + carrier phase* measurements (in the Filter section).
- Global Graphic Parameters: Specify the different options of the graphic.
 - Title: Sets the title of the graphic.
 - X-label: Sets the X label of the graphic.
 - Y-label: Sets the Y label of the graphic.
 - Clear: Clear all the options in the *Graphic Details* section.
 - Automatic Plot Limits: The limits of the graphic axis can be automatically or user set:
 - Xmin & Xmax
 - Ymin & Ymax
 - Individual Plot(s) Configuration: Options for the different plots that can contain a graphic (up to four plots).

- Plot 1/2/3/4: Selector for each plot. The options below this one are plot-dependent.
- Source File: Selects the source input file for the plot.
- Lines/Dot list: Allows changing the style of the plot, using Lines or Dots among many plot marker styles.
- Color Selection: Allows changing the color of the plot.
- Condition: The condition is a way to insert one or more conditions in order to select which lines of the source file will be used in the plotting. This has a space to write the required conditions and two comboboxes, which automatically sets the condition text. The text is the only that matters and the combo boxes only configure the text.

To specify a column, it should be done as '\$x' being x the number of the column. For example if you would like to specify the condition that the sixth column must be greater or equal than 10, you should do it as: ($\$6 \geq 10$)

You can specify a set of conditions by using AND [&] and OR [[]] operators, such as: ($\$6 \geq 10$) & ($\$6 \leq 20$) | ($\$8 == 2$)

You can specify that a column matches a specific string by surrounding the string by "\", such as: ($\$1 == \text{"OUTPUT"}$)

You can specify mathematical operations and constants, as: math.pi, math.e, math.sin() and math.cos(), as example: ($\$1 == \text{"POSTFIT"}$) & ($\text{math.cos}(\$11 + 5) > 0.707$)

You can specify a specific character inside a column, by using \$x[y], being x the column and y the character position beginning by 0, such as: ($\$1 == \text{"POSTFIT"}$) & ($\$7[0] == \text{"P"}$) [First character of seventh column is 'P']

You can also operate between columns, such as: ($(\$9 - \$11) < 2$)

- X Column: This allows specifying the column for the x values for the selected plot. The combo box will be updated by the First condition, but the text part is the one that matters. As in the conditions, you can specify several things. In general if it is required to plot a column it can be done by putting its column position, such as: 4. It can also be used the \$4 to plot the fourth column. As before, operations between scalars and columns can be done (and even use functions), such as: ($\$9 * 2 - \$11 * 3 - 1.5$).
 - Y Column: This allows specifying the column for the y values for the selected plot. The format is the same as in *X Column*.
 - Label: Sets the label for the selected plot.
- Plot button: This button executes the plotting tool of gLAB with the specified options.

4.4 GUI LIMITATIONS

For an increased easiness in use, the GUI does not include all the different options that the DPC is able to cope. In order to use these GUI-excluded features, the command-line DPC program should be used instead (see section 5 *gLAB* Data Processing Core (DPC)). In particular, the GUI does not cover the following cases:

- Besides from ANTEX, the DPC can also read the `GPSConstellationStatus.txt` file (which can be found in [RD-12]), compiled and updated by Richard B. Langley. This file provides a dictionary between satellite PRN and SVN, and its corresponding GPS Block. This allows correcting the phase centres of the satellites.
- The GUI *Available Frequencies* option of Filter section, can only take two different values: Single or Dual Frequency. With the DPC it is possible to specify availability of each frequency (for example setting as available F1 and F2 of GPS) by means of the '-pre:availf' option.
- In the current version, SBAS processing and Stanford/Stanford-ESA plots are available in the GUI, but the world maps, integrity ratio maps and the SBAS availability maps (for both processing and plotting) are only available through command line.
- SNR threshold in the GUI is set for all satellites, but through command line, a different SNR threshold can be set for each satellite.
- Only one timestamp range in the output KML file can be set through the GUI, but in command line, any number of timestamp ranges can be set.
- There are only two filter weights computation modes in the GUI (fixed weight and exponential elevation weight), but in command line there are also the following weight modes: Inverse of the sinus of the elevation, SNR weight and SNR divided by the sinus of the elevation.
- Filter weights in the GUI are applied to all satellites for a specific measurement, but in the command line each satellite can have a different weight.
- URA value from broadcast message can be used as the constant term in all weight modes, but only on command line.
- SBAS and DGNSS weights can not be overridden in the GUI, but in the command line they can be replaced by any weight type or combining both values. This option can be applied for each satellite individually.
- Weights involving SNR for dual frequency measurements can be set to use only the SNR of one of the measurements, or the highest value, or the smallest, or the mean of both values. This option is only on command line and can be set each satellite individually.
- There is an option to filter GPS satellites that have an URA value (from the navigation message) equal or higher than a user defined threshold. This option is only available in command line.
- In the GUI, only three GEO can be unselected. In command line there is no limit.

4.5 PROCESSING EXAMPLE

The next example gives an overview of a simple processing using gLAB, following all the steps from selecting input files to generating plots to analyse the data. The sample will cover a precise static positioning to obtain the precise coordinates of a station.

After opening the gLAB, the splash screen is shown (Figure 4-13). Clicking the *Input* tab will open the *Input* section (Figure 4-14). Clicking the *PPP Template* in the drop-down menu will preconfigure the GUI for a basic PPP. Clicking the *Examine* button for the *RINEX Observation File* will allow selecting which RINEX observation file will be used.



Figure 4-13: GUI Splash screen

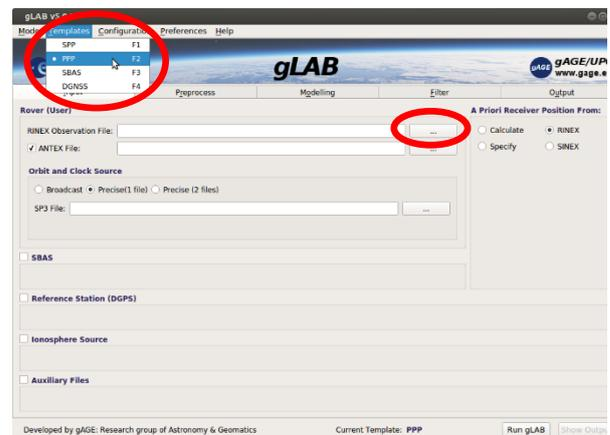


Figure 4-14: Input section

A file dialog will open (Figure 4-15), in order to go to the test directory (where all sample data files are found), the “Go Back one directory” button should be pressed, and afterwards doubleclick in “test” (Figure 4-16).

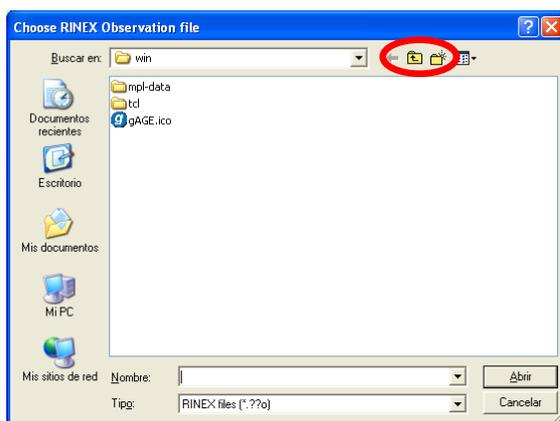


Figure 4-15: File Open dialog (1/3)

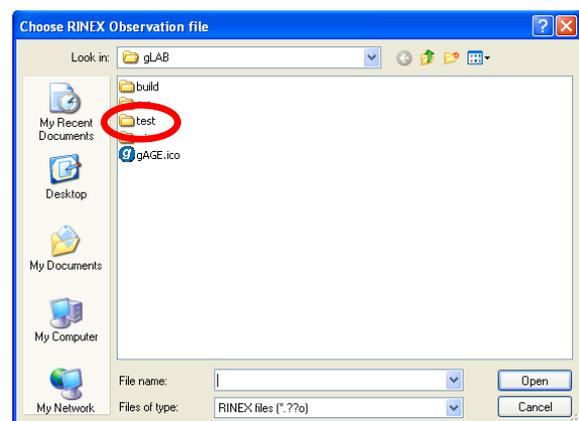


Figure 4-16: File Open dialog (2/3)

The directory where all the data is stored will be the one active (Figure 4-17). Double clicking on “madr2000.06o” will select this file and include it in the *Input* section (Figure 4-18). In order to include the rest of the required files, it should be clicked the *Examine of ANTEX File* (selecting the file “igs_pre1400.atx”), and the *Examine of SP3 File* (selecting the file “igs13843.sp3”).

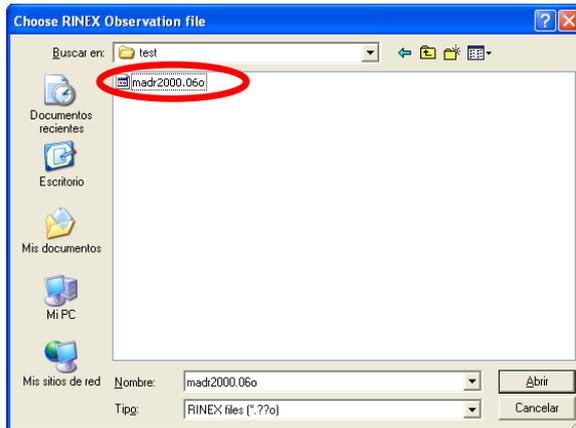


Figure 4-17: File Open dialog (3/3)

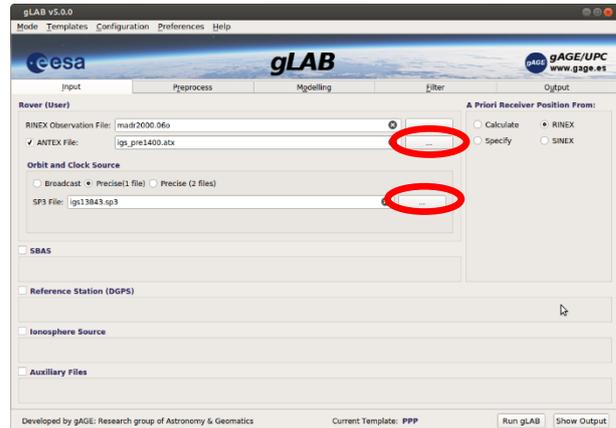


Figure 4-18: Updated *Input* section

Once input files are selected (Figure 4-19), *Filter* section button should be clicked in order to configure all the filter parameters. Once in this screen (Figure 4-20), the following parameters should be used (if not already checked):

- Navigation mode: PPP Template
- Estimate wet tropospheric residual: Yes
- Available frequencies: Dual frequency
- Receiver Kinematics: Static
- Measurement selection: Pseudorange + Carrier phase

All these parameters are the default ones, so no special change should be done if the program has just started. After being sure all parameters are properly selected, the output file should be selected by clicking in the *Output* section.

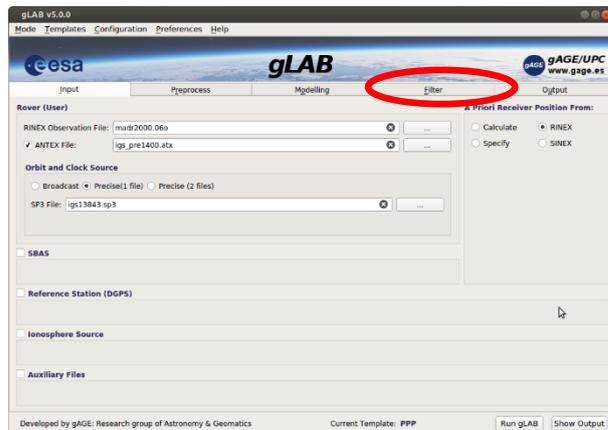


Figure 4-19: All input files are selected

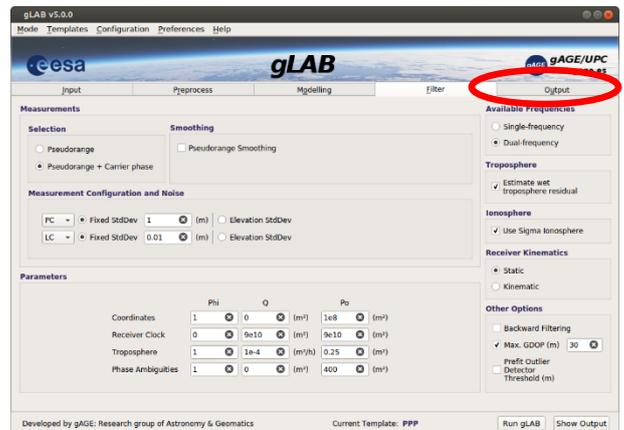


Figure 4-20: Filter section

In the *Output* section (Figure 4-21), the *Examine* button can be clicked to select the output file, Figure 4-22 shows the File Open dialog that will open. Writing “gLAB.out” and clicking enter will select this file name as output for the processing.

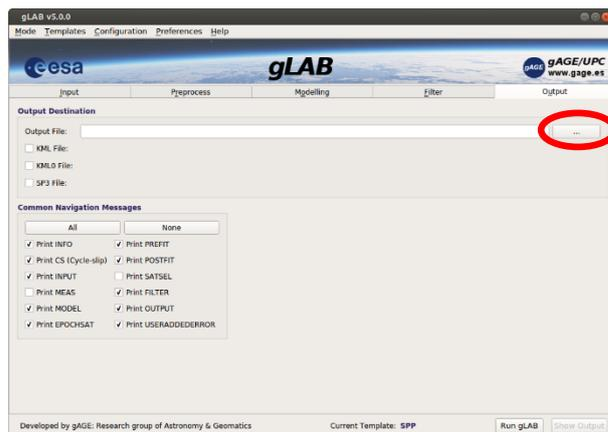


Figure 4-21: Output section

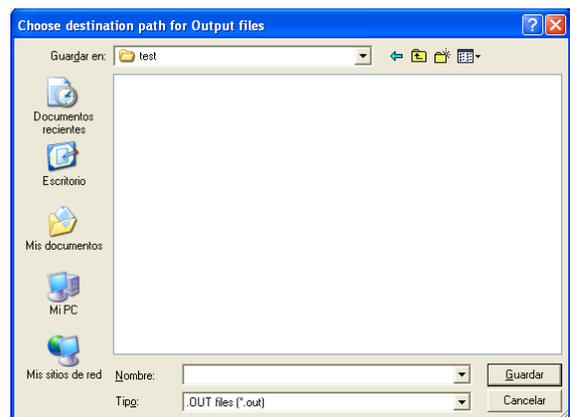


Figure 4-22: File open dialog for selecting the output file

After selecting the output (Figure 4-23) the *RUN* button will execute gLAB DPC with the selected options. While the DPC is running, the *RUN* button will be grey in order to avoid multiple clicks. After some seconds, the processing will end. To analyse the results click on the *Analysis* tab (Figure 4-24).

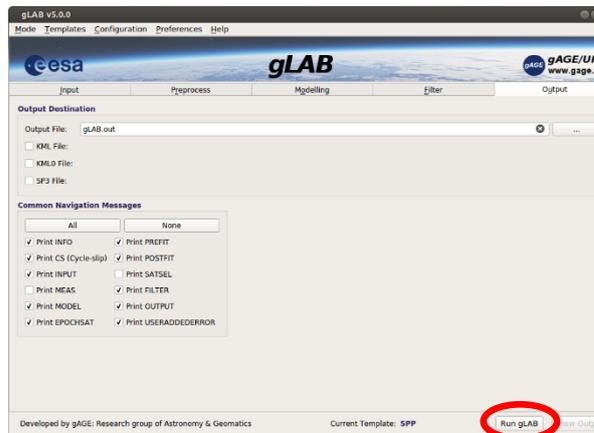


Figure 4-23: Output selected

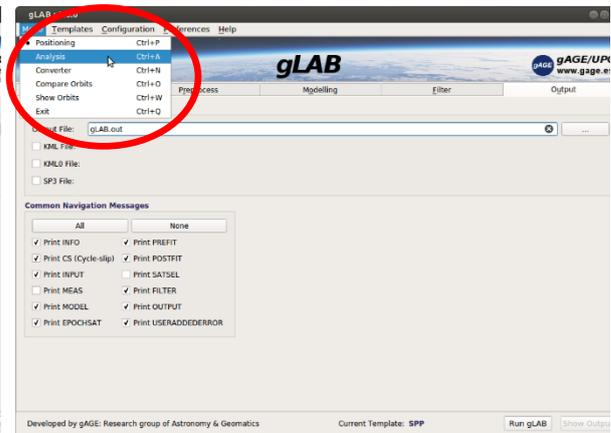


Figure 4-24: DPC has been executed

As explained in section 4.3 the *Analysis* mode (Figure 4-25) contains several templates in order to ease the generation of plots, in this sense, to plot the evolution of the receiver position in North/East/Up components the button *Receiver NEU position error* should be clicked. Figure 4-26 shows the configuration of the *Graphic Details* with this template. The *Source File* is the file selected in the *Output* section of the *Calculus* tab. Clicking the *Plot* button will generate this plot. While the program is processing the source file, the *Plot* button will be kept grey.

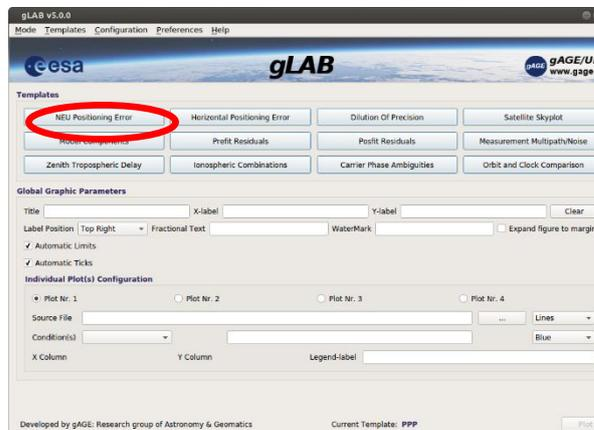


Figure 4-25: Analysis tab

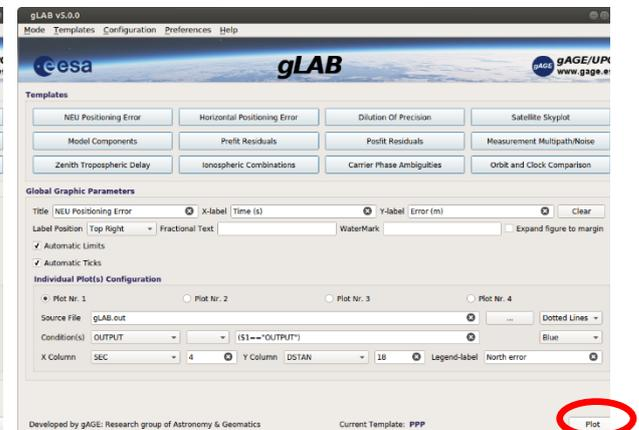


Figure 4-26: Receiver NEU position error configuration

When the processing is finished, a window will open (Figure 4-27) showing the generated plot, and the *Plot* button will be again available.

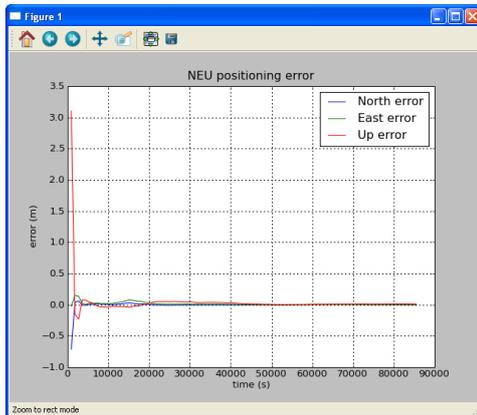


Figure 4-27: Plot sample

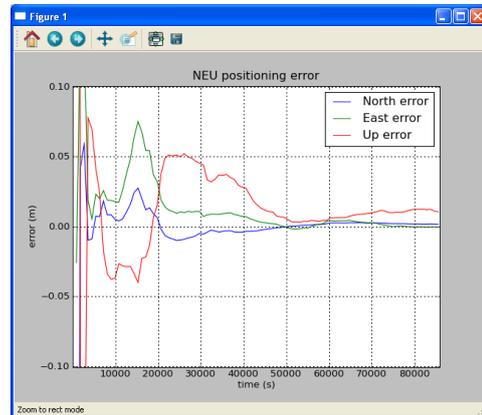


Figure 4-28: Plot sample (zoom)

The plotting utility allows zooming, moving and saving the current plot as a picture. All these functions can be accessed through the top toolbar. Figure 4-28 shows a zoom of the y axis. As would be expected for a PPP processing, the final position error is in the order of 1 cm.

5 gLAB DATA PROCESSING CORE (DPC)

The DPC is the processing tool of gLAB, it has been programmed in C with special care for the following objectives:

- Easy to use for an advanced user.
- Modularized, in order to incorporate future updates.
- Optimized for CPU and memory usage.

The options of the DPC are basically the same as the options of the GUI, with the exceptions taken in consideration in section 4.4 GUI Limitations. The DPC can be executed with the argument '-help', which will provide detailed information of the different arguments that can be used.

The following lines are an extract of the '-help' inline information:

GENERAL OPTIONS:

-help	Shows this help
-messages	Shows the fields of each output message (see below, 'VERBOSE OPTIONS')
-examples	Shows some examples to call the program
-config	Shows some info on the configuration file
-usererrorfile	Shows an example of user-defined error configuration file
-sigmamultipathfile	Shows an example of user multipath model configuration file
-rtcmv2conversioninfo	Shows detailed information of the text files generated from a RTCM v2.x conversion
-referenceposfile	Shows an example of reference position file

INPUT OPTIONS

-input:cfg <file>	Sets the input configuration file
-input:obs <file>	Sets the input RINEX observation file
-input:nav <file>	Sets the input RINEX navigation message file
-input:sp3 <file>	Sets the input SP3 orbits and clocks file
-input:orb <file>	Sets the input SP3 orbits
-input:clk <file>	Sets the input clock file
-input:con <file>	Sets the input constellation status file (default GPSConstellationStatus.txt)
-input:ant <file>	Sets the input ANTEX satellite/receiver antenna data file
-input:klb <file>	Sets the input RINEX navigation file for Klobuchar corrections, if this parameter is avoided, it is used the -input:nav file
-input:neq <file>	Sets the input RINEX navigation file for NeQuick corrections, if this parameter is avoided, it is used the -input:nav file
-input:bds <file>	Sets the input RINEX navigation file for BeiDou corrections, if this parameter is avoided, it is used the -input:nav file
-input:inx <file>	Sets the input IONEX file for ionospheric corrections
-input:fppp <file>	Sets the input FPPP file for ionospheric corrections
-input:neq <file>	Sets the input RINEX navigation file for NeQuick corrections, if this parameter is avoided, it is used the -input:nav file

- input:sbasiono <file> Sets the input RINEX-B or EMS SBAS file for ionospheric corrections
- input:dcb <file> Sets the input DCB source as a .DCB file, a RINEX navigation file, a IONEX file or a FPPP file.
If more than one file is given for the same model, the last one will be used
- input:rec <file> Sets the input GPS receiver types file (default GPS_Receiver_Types) for DCB usage
- input:snx <file> Sets the input SINEX file for receiver position
- input:sbas <file> Sets the SBAS data file (RINEX-B v2.11 or EMS). Activates SBAS processing mode
- input:dgnss <file> Sets the input RINEX observation file of the Reference Station for DGNSS
- input:rtcm <file> Sets the input RTCM binary file, gLAB will automatically detect the RTCM version
- input:rtcm2 <file> Sets the input RTCM v2.x binary file
- input:rtcm3 <file> Sets the input RTCM v3.x binary file
- input:rtcm:initdate <date> Sets the date when the record of the binary file RTCM began (YYYYMMDD), required only when processing or converting RTCM v2.x
- input:rtcm:inithour <hour> Sets the hour in GPST, when the record of the binary file RTCM began (HH 24-hour format), required when processing or converting RTCM v2.x and RTCM v3.x
- input:sigmpath <file> Sets the data file for user sigma multipath model for SBAS (execute 'gLAB -sigmamultipathfile' for details)
- input:usererror <file> Sets the data file for adding user defined error signal to raw measurements (execute 'gLAB -usererrorfile' for details)
The use of '-input:nav' file will preconfigure the parameters to work in the Standard Point Positioning (SPP).
The use of '-input:sp3'/'-input:orb'/'-input:clk' will preconfigure the parameters to work in the Precise Point Positioning (PPP) approach. All the values can be overridden by specifying the parameters. See below for more details on which are the defaults for each mode.
The use of '-input:sbas' will preconfigure the parameters to work in SBAS mode.
The use of any '-input:rtcm' without a '-input:obs' will result into converting the input RTCM to its corresponding output.
- input:refpos <file> Sets the reference position file. It can be a SP3 or a columnar text file (execute 'gLAB -referencefile' for details)
This option will set receiver positioning mode to 'calculate' if non set. See '-pre:setrecpos' option below for details

PREPROCESSING OPTIONS

- pre:starttime <date> Set the start time for processing data. The following date formats are accepted:
YYYYMMDD HH:MM:SS (HH in 24 hour format)
YYYY/MM/DD HH:MM:SS (HH in 24 hour format)

	YYYY/DoY SoD
	GPSWeek SoW
-pre:endtime <date>	Set the end time for processing data. See '-pre:starttime' option above for date formats
-pre:dec #	# = number Decimate input data by # seconds [default 300 for SPP/PPP, 1 for SBAS, 0 for DGNSS] In product comparison mode (see below, in 'WORK MODES'), it sets the time step of the comparisons
-pre:sat [+~]g#[-#]	Exclude satellite from processing [+~] Optional symbols for selecting (with a plus '+') or unselecting (with a minus '-'). If no symbol is provided, the default behaviour is to unselect satellites. g = character determining GNSS system (G->GPS) # = PRN number (If #=0, all satellites of the selected GNSS system will be unselected). [-#] = Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation).
-pre:geoexclude #[,#,...]	Exclude GEO satellite from SBAS. Data from this GEO will be ignored for SBAS corrections # = PRN number [,#,...] Optionally, a list of GEO can be provided by separating the numbers with commas (',')
-pre:geosel #	Select GEO satellite for SBAS corrections # = 0 => Use data from all GEO (all GEO mixed) [default in NPA if mixing GEO data is enabled] # = 1 => Use GEO from the first line of SBAS data read [default in PA] # = 2 => Use the GEO with highest elevation 120 <= # <= 210 => Use the GEO with the given PRN
-pre:snr	Enable SNR (Signal to Noise Ratio) deselection. The SNR is read from the observation file. [default off] If no SNR is present in the observation file, no deselection is done. The default threshold is 30 dBHz
-pre:snrsel g#[-#] <val>	Set a SNR threshold for a given satellite. If this option is given, SNR deselection will be activated g = character determining GNSS system (G->GPS) # = PRN number. If #=0, then the threshold will be applied to all satellites of the selected GNSS system [-#] = Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation). <val> Value for SNR threshold in dBHz. This value is compared to the SNR obtained from the RINEX file in all code and carrier phase measurements. If no SNR value is present in the RINEX file, this value will be omitted.
-pre:elevation <val>	Elevation mask. Satellites below this threshold will be discarded (in degrees) [default 5]

- pre:eclipse Discard satellites under Earth eclipse [default: enabled for PPP, disabled for SPP]
- pre:availf g# Mark frequencies available [default all]
g = character determining GNSS system (G->GPS)
= frequencies available
Sample: '-pre:availf G12' Frequencies 1 and 2 of GPS available
'-pre:availf G1' Frequency 1 of GPS available, 2 unavailable
- pre:smooth <val> Number of epochs of smoothing [default 0 (disabled) for non SBAS processing, default 100 for SBAS processing]
- pre:smoothMeas <n> <meas>
Smooth measurement in filter <n> with measurement type <meas>
In general, <n> is a pseudorange and <meas> a carrier phase, see option '-filter:select' for more information in the selection of measurements to be used in the filter type <meas> for carrier phase smoothing are: L1P, L2P, IF (Iono-free) and DF (divergence-free)
- pre:smoothmin <val> Number of epochs of continuous code smoothing before steady-state operation [default 0 for non SBAS processing, 360 for SBAS processing]
Satellites will be excluded until reaching this steady-state
- pre:dgnss:excludeSmoothingConvergenceUser
Exclude satellites during the smoothing convergence in the User Station [default off]
- pre:dgnss:excludeSmoothingConvergenceUser
Do not exclude satellites during the smoothing convergence in the User Station
- pre:dgnss:excludeSmoothingConvergenceRef
Exclude satellites during the smoothing convergence in the Reference Station,
it will be effective if at least one cycle-slip detector is activated [default on]
- pre:dgnss:excludeSmoothingConvergenceRef
Do not exclude satellites during the smoothing convergence in the Reference Station
- pre:dgnss:smoothmin <val>
Number of seconds of continuous code smoothing before steady-state operation [default 360]
- pre:refpos:deg <val> Set the interpolation degree for the reference position values [default 0]
- pre:setrecpos <val>
<val> = **RINEX** Set the user receiver a priori position as the one specified in the RINEX observation file [default]
RINEX position will be used for modelling and for NEU error.
<val> = **SINEX** Set the user receiver a priori position to be read from a SINEX file (to be specified by the '-input:snx' parameter)
SINEX position will be used for modelling and for NEU error.
<val> = <x> <y> <z>
<val> = **Set** <x> <y> <z> Specify the receiver a priori position in metres
Sample: '-pre:setrecpos 4789032.7143 176594.9690 4195013.2268'
Specified position will be used for modelling and for NEU error.

- <val> = **SetGeod <Lon> <Lat> <Height>** Same as 'SetGeod', but the initial coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- <val> = **SetRef** Read reference position for each epoch from reference position file. Specified position will be used for modelling and for NEU error. See parameters '-referenceposfile', '-input:refpos' and '-pre:refpos:deg' for help on the reference file
- <val> = **calculate** The user receiver a priori position will be calculated by the program and used for modelling, starting from (6378137,0,0). This is especially useful when processing moving receivers (trajectories) or when the approximate receiver position is not known. With this option activated, the differential fields of the OUTPUT message will be zero
- <val> = **calculateRef** Same as 'calculate', but instead of printing (0,0,0) in the output NEU error, it will compute the NEU error using the coordinates from the reference file. See parameters '-referenceposfile', '-input:refpos' and '-pre:refpos:deg' for help on the reference file
- <val> = **calculateRINEX** Same as calculate, but the initial coordinates will be the one read in the RINEX observation header. If RINEX coordinates are (0,0,0), then Earth's surface will be used as initial coordinates
- <val> = **calculateRINEXRef** Same as 'calculateRINEX', but instead of printing (0,0,0) in the output NEU error, it will compute the NEU error using the coordinates from the reference file. See parameters '-referenceposfile', '-input:refpos' and '-pre:refpos:deg' for help on the reference file
- <val> = **calculateUSER <x> <y> <z>** Same as 'calculate', but the initial coordinates will be the one given by the user in this parameter (in metres)
- <val> = **calculateUSERGeod <Lon> <Lat> <Height>** Same as 'calculateUser', but the initial coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- <val> = **calculateUSERRef <x> <y> <z>** Same as 'calculateUSER', but instead of printing (0,0,0) in the output NEU error, it will compute the NEU error using the coordinates from the reference file. See parameters '-referenceposfile', '-input:refpos' and '-pre:refpos:deg' for help on the reference file
- <val> = **calculateUSERGeodRef <Lon> <Lat> <Height>** Same as 'calculateUSERRef', but the initial coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- <val> = **DGNSSbaseline** The user receiver (rover) a priori position will be calculated by the program as in option 'calculate', but the differential fields in the OUTPUT message will be computed against the

- reference antenna position, (baseline vector from user to reference station), and the reference station coordinates will be read from RINEX or RTCM input file.
- <val> = **DGNSSRinexRover** Same as 'DGNSSbaseline', but instead of comparing with the reference station, it will compare the user receiver (rover) coordinates with the coordinates read from the rover RINEX observation file
- <val> = **DGNSSRoverUSER** <RoverX> <RoverY> <RoverZ> Same as 'DGNSSbaseline', but instead of comparing with the reference station, it will compare the user receiver (rover) with the position given in this parameter
- <val> = **DGNSSRoverUSERGeod** <RoverLon> <RoverLat> <RoverHeight> Same as 'DGNSSRoverUSER', but the rover coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- <val> = **DGNSSRoverUSERRef** Same as 'DGNSSbaseline', but instead of comparing with the reference station, it will compare the user receiver (rover) solution with the position given by the reference file. See parameters '-referenceposfile', '-input:refpos' and '-pre:refpos:deg' for help on the reference file
- <val> = **DGNSSUserRoverRef** <RefX> <RefY> <RefZ> Same as 'DGNSSRoverUSERRef', but the reference station coordinates will be provided in this parameter (this mode only works when computing DGNSS with a RINEX file)
- <val> = **DGNSSUserGeodRoverRef** <RefLon> <RefLat> <RefHeight> Same as 'DGNSSUserRoverRef', but the reference station coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- <val> = **DGNSSUserbaseline** <RefX> <RefY> <RefZ> Same as 'DGNSSbaseline', but the reference station coordinates will be provided in this parameter (this mode only works when computing DGNSS with a RINEX file)
- <val> = **DGNSSUserGeodbaseline** <RefLon> <RefLat> <RefHeight> Same as 'DGNSSUserbaseline', but the reference station coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres.
- <val> = **DGNSSUserRinexRover** <RefX> <RefY> <RefZ> Same as 'DGNSSRinexRover', but the reference station coordinates will be provided in this parameter (this mode only works when computing DGNSS with a RINEX file)
- <val> = **DGNSSUserGeodRinexRover** <RefLon> <RefLat> <RefHeight> Same as 'DGNSSUserRinexRover', but the reference station coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres

- <val> = **DGNSSRefRoverUSER** <RefX> <RefY> <RefZ> <RoverX> <RoverY> <RoverZ> Same as 'DGNSSRoverUSER', but the reference station coordinates will be provided in this parameter (this mode only works when computing DGNSS with a RINEX file)
- <val> = **DGNSSRefGeodRoverUSERGeod** <RefLon> <RefLat> <RefHeight> <RoverLon> <RoverLat> <RoverHeight> Same as 'DGNSSRefRoverUSER', but the rover and reference station coordinates are given in geodetic coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- <val> = **DGNSSRefCarRoverUSERGeod** <RefX> <RefY> <RefZ> <RoverLon> <RoverLat> <RoverHeight> Same as 'DGNSSRefRoverUSER', but the rover coordinates are given in geodetic coordinates and the reference station in cartesian coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres.
- <val> = **DGNSSRefGeodRoverUSERCar** <RefLon> <RefLat> <RefHeight> <RoverX> <RoverY> <RoverZ> Same as 'DGNSSRefRoverUSER', but the reference station coordinates are given in geodetic coordinates and the rover in cartesian coordinates. Longitude and latitude are given in degrees, within the ranges [-180..180] and [-90..90] respectively. The height is given in metres
- pre:setrectype <val> <val> = **gpsrt** Set the receiver type as the one specified in the GPS_Receiver_Types file (provided by '-input:rec') [default if '-input:rec' provided]
- <val> = **0** Set the receiver type as 'Unknown' [default]
- <val> = **1** Set the receiver type as 'Cross-correlated'
- In this mode, P2 will be corrected with the DCB of P1-C1
- <val> = **2** Set the receiver type as 'No P1'
- In this mode, C1 will be used instead of P1
- <val> = **3** Set the receiver type as 'Consistent measurements'
- pre:prealign Prealign carrier phase measurements with its corresponding pseudorange [default on]
- pre:checkcodejumps Check for pseudorange jumps and adjust the phase accordingly. See 'Notes for preprocessing' below [default on]
- pre:checkcodejumps Do not check for pseudorange jumps
- pre:cs:datagap <val> Data gap. Maximum period of time, without measurements, allowed before declaring cycle-slip (in seconds) [default 40]
- NOTE: If <val> is shorter than the sampling rate, all measurements will be discarded
- pre:cs:lli Use Loss of Lock Indicator for cycle-slip detection [default off]
- pre:cs:lli Do not use Loss of Lock Indicator for cycle-slip detection [default off]
- pre:cs:ncon Use N-consecutive epochs for cycle-slip detection [default on]
- pre:cs:ncon Do not use N-consecutive epochs for cycle-slip detection [default off]
- pre:cs:ncon:min <val> After a short data gap (i.e., shorter than the value set in '-pre:cs:datagap' with default of 40 seconds) discard the first <val>

- epochs. NOTE: If sampling interval is greater than 15 seconds, gLAB will automatically disable this option [default 2]
- pre:cs:li Use the carrier phase geometry-free combination (LI) for cycle-slip detection (2 frequencies) [default in PPP]
- pre:cs:li Do not use carrier phase geometry-free combination (LI) for cycle-slip detection (2 frequencies) [default in SPP]
Li combination is a slow varying function which only has ambiguity and ionosphere
Each epoch and satellite an expected LI value is computed and compared against the measured one, if this difference is above a certain threshold, a cycle-slip is marked.
This threshold is $(\max + (\min - \max) \cdot \exp(-dt/t))$, being dt the time between epochs
- pre:cs:li:maxjump <val> Maximum jump threshold between two consecutive measured LI values [default 1]
- pre:cs:li:max <val> Maximum threshold between estimated and measured LI values [default 0.08]
- pre:cs:li:t0 <val> Time constant to set the threshold between maximum and minimum [default 60]
- pre:cs:li:samples <val> Minimum number of epochs needed to fit the second-degree polynomial [default 7]
- pre:cs:bw Use Melbourne-Wubbena (BW) for cycle-slip detection (2 frequencies) [default in PPP]
- pre:cs:bw Do not use Melbourne-Wubbena (BW) for cycle-slip detection (2 frequencies) [default in SPP]
BW combination is a mixed combination between carrier phase and pseudoranges.
This combination is free of ionosphere and geometry, thence constant, but has a high noise (due to the pseudorange measurements used). If this noise is low enough, it is straightforward to detect cycle-slips, but in noisy environments
BW is not able to detect cycle-slips. The algorithm using BW computes the mean and the standard deviation of the last epochs in order to obtain an estimated value and the noise level of the combination. The estimated value is compared against the measured value, and the noise level is used for the threshold of this difference.
Difference must be lower than standard deviation multiplied by a number (k-factor).
This threshold has minimum (min) and maximum (max) saturation values.
- pre:cs:bw:siginit <val> Initial standard deviation (in metres) to use in BW after a cycle-slip [default 2]
- pre:cs:bw:sigmin <val> Minimum threshold (in metres) between estimated and measured BW values in relation to its standard deviation [default 0.8]
- pre:cs:bw:timewindow <val> Number of epochs to compute the mobile mean over the Hatch filter [default 300]

- pre:cs:bw:kfactor <val> Relation between estimated and measured BW values in relation to its standard deviation [default 5]
- pre:cs:bw:samples <val> Minimum number of epochs needed to stabilize the mean and sigma in the BW cycle-slip detector [default 2]
- pre:cs:l1c1 Use the L1-C1 combination for cycle-slip detection (1 frequency) [default in PPP]
- pre:cs:l1c1 Do not use the L1-C1 combination for cycle-slip detection (1 frequency) [default in SPP]
- pre:cs:l1c1:unconcheck Use the inconsistency check in L1-C1 cycle-slip detection (1 frequency) [default]
- pre:cs:l1c1:unconcheck Do not use the inconsistency check in L1-C1 cycle-slip detection (1 frequency)
- pre:cs:l1c1:unconcheck:th <val>
 Threshold (in metres) for the inconsistency check in L1-C1 cycle-slip detection (1 frequency) [default 20]
 The L1-C1 averages the difference between carrier phase and pseudorange measurements in F1 for several epochs.
 This cycle-slip detection method is very useful for single-frequency receivers, as it only requires measurements from one frequency. As a counterpart, the ionospheric term is different for C1 and L1 thence, this combination will tend to diverge. It becomes necessary to set a smoothing window to limit this divergence (-pre:cs:l1c1:timewindow). This makes that this method becomes a bit limited with data rates too low. Ideally this method should be used with rates of 1 Hz
- pre:cs:l1c1:kfactor <val> Relation between estimated and measured L1-C1 values in relation to its standard deviation [default 5]
- pre:cs:l1c1:timewindow <val>
 Number of epochs to limit the L1-C1 ionosphere divergence [default 300]
- pre:cs:l1c1:samples <val>
 Minimum number of epochs needed to stabilize the mean and sigma in the L1C1 cycle-slip detector [default 2]
- pre:cs:l1c1:init <val> Initial standard deviation for the threshold calculation in the L1-C1 [default 3] (m)
- pre:usererrorafter Add user defined error after prealigning, checking cycle-slips and smoothing [default off]

MODELING OPTIONS (use -model:... to activate, --model:... to deactivate)

- model:iono <val> <val> = no Do not correct ionosphere [default in PPP] (equivalent to '--model:iono')
- = Klobuchar Correct measurements with Klobuchar model [default in SPP]
- = NeQuick Correct measurements with NeQuick model
- = BeiDou Correct measurements with BeiDou model
- = IONEX Correct measurements with IONEX file data
- = FPPP Correct measurements with FPPP file data

= SBAS Correct measurements with SBAS iono corrections (but do not apply any other SBAS correction)
 If more than one iono model option is given, the last one will be used

-model:trop Correct troposphere delay [default on]
 --model:trop Do not correct troposphere delay
 -model:trop:nominal <val>
 <val> = Simple Compute a simple tropospheric nominal depending on receiver's height over the sea level. [default in PPP]
 <val> = UNB3 Troposphere nominals are calculated from the receiver's height and estimates of five meteorological parameters: pressure, temperature, water vapour pressure, temperature lapse rate and water vapour lapse rate.
 It is adopted by SBAS systems (see RTCA-MOPS, 2006). [default in SPP]
 <val> = TropoGal Use Galileo's tropospheric model

-model:trop:mapping <val>
 <val> = Simple Compute the mapping as the obliquity factor described in Black and Eisner, 1984. This mapping only depends on satellite elevation and it is common for wet and dry components. [default in SPP]
 <val> = Niell Compute the mapping described in A.E. Niell, 1996. This mapping considers different obliquity factors for the wet and dry components [default in PPP]

-model:satclocks Correct the measurements with the satellite clock offsets estimations [default on]
 -model:relclock Correct the measurements with the relativistic clock model [default on]
 -model:satmovinflight Consider satellite movement during signal flight time [default on]
 -model:earthrotinflight Consider Earth rotation during signal flight time [default on]
 -model:satphasecenter Correct satellite phase centre to mass centre corrections [default on in PPP, off in SPP]
 -model:satphasevar Correct satellite phase centre to mass centre corrections variations with zenithal angle [default off for SPP, on for PPP]

-model:recphasecenter <val> <val> = no Do not correct antenna receiver phase centre [default in SPP]
 <val> = ANTEX Use the ANTEX file to correct the antenna phase center [default in PPP]
 <val> = <nfreq> <dN> <dE> <dU> Set dN, dE, dU as the antenna phase centre for the frequency <nfreq>
 <nfreq> = Frequency number (typical for GPS, 1 and 2)
 <dN> = North correction [in metres]
 <dE> = East correction [in metres]
 <dU> = Up correction [in metres]
 Sample: '-model:recphasecenter 1 0 0 0.11 -model:recphasecenter 2 0 0 0.128'
 Typical AOAD/M_T antenna phase centre correction, 11 cm and 12.8 cm in the
 Up component for frequencies 1 and 2

-model:recphasevar	Correct antenna receiver phase centre variations [default off in SPP, on in PPP]
-model:strictradome	When using ANTEX to correct the receiver phase centre, this option will force a perfect match between the antenna name and radome reported in the receiver RINEX file and the ones in the ANTEX file. If this option is disabled, and the radome is not found, the corrections will be used considering the radome "NONE" [default off]
-model:arp <val>	<val> = no Do not apply any Antenna Reference Point (ARP) correction [default in SPP] (equivalent to '--model:arp') <val> = RINEX Use as ARP the information on the RINEX file (field 'ANTENNA: DELTA H/E/N') [default in PPP] <val> = <dN> <dE> <dU> Set dN, dE, dU as the ARP <dN> = North correction [in metres] <dE> = East correction [in metres] <dU> = Up correction [in metres]
-model:dcb:p1c1 <val>	<val> = no Do not correct Differential Code Biases between P1 and C1 codes (equivalent to '--model:dcb:p1c1') Do not identify C1 and P1 never <val> = flexible Do not correct Differential Code Biases between P1 and C1 codes [default on] Identify C1 and P1 when one of them is missing <val> = strict Correct Differential Code Biases between P1 and C1 codes Identify C1 and P1 when applicable (defined by the receiver type)
-model:dcb:p1p2 <val>	<val> = no Do not correct Differential Code Biases between codes P1 and P2 (equivalent to '--model:dcb:p1p2') <val> = RINEX Correct Differential Code Biases between codes P1 and P2 using TGDs from the RINEX navigation file [default in SPP, off in PPP] <val> = DCB Correct Differential Code Biases between codes P1 and P2 from a precise DCB file Identify C1 and P1 when applicable (defined by the receiver type) <val> = IONEX Correct Differential Code Biases between codes P1 and P2 using DCB from IONEX file <val> = FPPP Correct Differential Code Biases between codes P1 and P2 using DCB from FPPP file
-model:windup	Correct the wind up term for carrier phase measurements [default]
-model:solidtides	Correct the Earth surface deformation due to solid tides [default in PPP, off in SPP]
-model:relpath	Correct the path range delay term due to the gravitational gradient between receiver and transmitter [default on in PPP, off in SPP]
-model:sathealth	Only valid when using broadcast products. Use the healthy flag of the navigation message [default on]
-model:brdctranstime	Only valid when using broadcast products. Check that transmission time of message is equal or before the current epoch of current time [default on for non SBAS processing, off for SBAS processing]
-model:maxurabrdc <val>	Only valid when using broadcast products. Set the discard threshold for satellites which have an URA value equal or greater than this value (in metres) [default off]

- model:orbit:deg <val> Precise orbit interpolation degree [default 10]
- model:clock:deg <val> Precise clock interpolation degree [default 0 - no interpolation]
- model:orbmaxgaps <val> Set maximum number of gaps between samples used for precise orbit interpolation [default 8]
- model:clkmaxgaps <val> Set maximum number of gaps between samples used for precise clock interpolation [default 2]
- model:orbtotmaxgaps <val> Set the maximum number of gaps between all samples used for precise orbit interpolation [default 16]
- model:clktotmaxgaps <val> Set the maximum number of gaps between all samples used for precise clock interpolation [default 4]
- model:orbprevsample When a concatenated SP3 file is read for orbit data, if the last epoch of the previous day is the same as the first epoch of the current day, use the last orbit sample of the previous day instead of the first sample of the current day [default off]
This typically occurs with samples at epoch 0h 0m. This option will only have effect if both repeated samples have valid values.
- model:clkprevsample When a concatenated SP3/Clock file is read for clock data, if the last epoch of the previous day is the same as the first epoch of the current day, use the last orbit sample of the previous day instead of the first sample of the current day [default off]
This typically occurs with samples at epoch 0h 0m. This option will only have effect if both repeated samples have valid values.
- model:sbasmaritime Configure SBAS parameters for SBAS maritime mode (see notes on SBAS maritime below) [default off]
- model:alarmmsgtype2 When reading an SBAS message type 0, parse it as type 2 (except if all bits are 0) [default off]
- model:ignoretype0 Ignore all SBAS messages type 0 [default off]
- model:udreithreshold # Set the UDREI threshold (from fast corrections) for discarding satellites. Satellites with UDREI equal or higher than this threshold will be discarded. Threshold values have to be in the range [1-13] [default no threshold]
- model:sigfltnomt10offset # When message type 10 is not available or disabled, the fast correction sigma is computed as UDRE sigma plus an offset of 8 metres. With this parameter the offset of 8 metres can be changed to any value (in metres)
- model:sbasmode <val> Select navigation mode for SBAS processing:
<val> = PA Precision Approach [default]
<val> = NPA Non Precision Approach
- model:geoswitch Enable GEO switch for SBAS processing. See 'Mode and GEO switch notes' below [default off]
- model:selectbestgeo If GEO switching for SBAS processing is enabled, gLAB will compute the protection levels for all GEO available and will select the one with lower protection levels. [default off].
Enabling this option will noticeably increase the computation time (especially if there are many GEOs in the SBAS data file), as gLAB needs to compute the SBAS modelling with each GEO, and then

- select the best one. Read section "Selection of best GEO:" below for details on the criteria of how the best GEO is selected.
- model:maintaingeo If GEO switch for SBAS is enabled, maintain current GEO while possible independently if it is the GEO selected by the user or it has been selected due to a GEO switch [default on]
 - model:geofallback If GEO switch for SBAS is enabled, always try to return to the initial selected GEO [default off]
 - model:sbasmodeswitch Enable navigation mode switching for SBAS processing [default off]
 - model:mixedgeo Enable the usage of mixed GEO data (messages from all GEO are treated as if there were from an unique GEO) [default off]
 - model:initcoordnpa In SBAS mode, if receiver coordinates are to be calculated without giving any initial condition (parameter -pre:setrecpos calculate), compute the first epochs using Klobuchar until the receiver coordinates have converged.
This is useful due to the initial gLAB coordinate may do that the IPPs (Ionospheric Pierce Point) fall outside the SBAS region, making all satellites unavailable due to the lack of ionosphere. This option only has effect if SBAS mode switch is disabled and receiver coordinates are set to 'calculate' [default on]
 - model:sbasreceiver # Set receiver class type for SBAS (for computing variance of the airborne receiver)
= 0 User defined receiver model (defined with parameters '-model:sigmpath', '-model:sigdiv', '-model:signoise' and '-input:sigmpath').
The receiver sigmas not defined by the user (with the previous parameters) will use the default values for class 2 receiver
= 1 Class 1 equipment
= 2,3,4 Class 2,3,4 equipment (all equivalent) [default 2]
 - model:geoacqtime # Set the minimum time (in seconds) to consider that gLAB has received enough SBAS corrections from a GEO counting from the first message received [default 300]
This timer is set to ensure that we have received enough corrections from the GEO we want to switch to.
If this timer is set too low (few seconds), it may happen that we switch to a GEO with not enough data (due to we are in initialization or the GEO has received an alarm message
gLAB will not switch to any GEO before this time, except for when an alarm message is received and there is no other GEO available
 - model:switchtime # Set the minimum time (in seconds) between a GEO or mode switch and the following one [default 20]
This timer is set to avoid continuous switching in the same epoch when all GEO do not have enough data.
If this timer is set to zero, a maximum of 2 switches per epoch (for both mode and GEO) will be done
 - model:sbastmout <n> <val> Set time out value for SBAS messages (except for fast and range rate corrections) in both modes, PA and NPA
<n> is the message type number
<val> is the time out value (in seconds)

- model:sbastmoutpa <n> <val> Set time out value for SBAS messages (except for fast and range rate corrections) in PA mode
<n> is the message type number
<val> is the time out value (in seconds)
- model:sbastmoutnpa <n> <val>
Set time out value for SBAS messages (except for fast and range rate corrections) in NPA mode
<n> is the message type number
<val> is the time out value (in seconds)
- model:sbastmoutfc <val>
Set time out value for fast corrections in both modes, PA and NPA
<val> is the time out value (in seconds)
- model:sbastmoutfcpa <val>
Set time out value for fast corrections in PA mode
<val> is the time out value (in seconds)
- model:sbastmoutfcnpa <val>
Set time out value for fast corrections in NPA mode
<val> is the time out value (in seconds)
- model:sbastmoutrrc <val>
Set time out value for range rate corrections in both modes, PA and NPA
<val> is the time out value (in seconds)
- model:sbastmoutrrcpa <val>
Set time out value for range rate corrections in PA mode
<val> is the time out value (in seconds)
- model:sbastmoutrrcnpa <val>
Set time out value for range rate corrections in NPA mode
<val> is the time out value (in seconds)
- model:sigmpath <val1> <val2> [<val3>]
Set parameters a, b and c for sigma multipath for SBAS airborne receiver, being $\sigma = a + b \cdot e^{-\text{satelevation}/c}$ and satelevation in degrees.
<val1> a value (in metres) [default 0.13 for class 2/3/4 receiver]
<val2> b value (in metres) [default 0.53 for class 2/3/4 receiver]
[<val3>] c value (in degrees) [default 10 for class 2/3/4 receiver]
This argument is optional in order to maintain compatibility with previous versions
- model:sigdiv <val>
Set a fixed value (in metres) for sigma divergence for SBAS airborne receiver
- model:signoise <val>
Set a fixed value (in metres) for sigma noise for SBAS airborne receiver
- model:khpa <val>
Set the Kh factor value used when computing the horizontal protection level in PA mode [default 6]
- model:khnpa <val>
Set the Kh factor value used when computing the horizontal protection level in NPA mode [default 6.18]
- model:kvpa <val>
Set the Kv factor value used when computing the vertical protection level in PA mode [default 5.33]

- model:kvnpa <val> Set the Kv factor value used when computing the vertical protection level in NPA mode [default 5.33]
- model:nofastcor Set SBAS fast and RRC corrections values to 0 [default off]
- model:norrccor Set SBAS RRC correction value to 0 [default off]
- model:noslowcor Set SBAS slow corrections values to 0 [default off]
- model:noionocor Set SBAS ionosphere correction value to 0 [default off]
- model:nofastsigma Set SBAS fast and RRC sigmas (sigma UDRE and degradation terms) values to 0 [default off]
- model:nofastdeg Set SBAS fast degradation term value to 0 [default off]
- model:norrccsigma Set SBAS RRC degradation term value to 0 [default off]
- model:noslowsigma Set SBAS slow correction degradation term to 0 [default off]
- model:noionosigma Set SBAS ionosphere sigma to 0 [default off]
- model:notroposigma Set SBAS troposphere sigma to 0 [default off]
- model:noenroutesigma Set SBAS En Route Through NPA degradation term to 0 [default off]
- model:nodeltaudre Set SBAS Delta UDRE factor to 1 [default off]
- model:nomt10 Disable use of message type 10 in all modes [default off]
- model:nomt2728 Disable use of messages type 27 and 28 in all modes (this is equivalent to parameter '-model:nodeltaudre') [default off]
- model:dgnss:sigmaiflation
The sigma is inflated during the smoother convergence (see DGNSS notes at the end) [default on]
- model:dgnss:sigmaiflation
Do not use the sigma inflation during the smoother convergence
- model:dgnss:maxage <val>
Set the maximum age value (in seconds) to stop applying DGNSS corrections [default 31]
- model:dgnss:maxcorrval <val>
Set the maximum value for a DGNSS correction to be considered valid (in metres) [default 500]
NOTE: When setting any fast, slow, ionosphere correction or their sigmas to 0, gLAB will still check all the conditions for the current mode. For example, if gLAB is in PA mode and the '-model:nofastcor' parameter is set, then it will search for a fast correction, and if it is available, it will set the value to 0 instead of the one given in the SBAS message. If there is no SBAS fast correction available, the satellite will not be used.
NOTE: The SBAS timeouts given by the user will override the defaults stated in MOPS-D.

FILTERING OPTIONS

- filter:sigmaiono Use standard deviation data from IONEX or FPPP or SBAS if these iono models are used [default on] ('--filter:sigmaiono' to disable it)
- filter:stepdetector Check for jumps in measurements using the prefits residuals (only for C1C measurement) [default off]
Use '--filter:stepdetector' to disable it
- filter:prefitoutliers:median <val>
Check for outliers in the prefits residuals using the median, with <val> (in metres) as the threshold [default off]

- Use '--filter:prefitoutliers:median' or '-filter:prefitoutliers:median 0' to disable it. See notes on prefit outlier detectors below
- filter:prefitoutliers:abs <val>**
 Check for outliers in the prefits residuals comparing absolute values, with <val> (in metres) as the threshold [default off]
 Use '--filter:prefitoutliers:abs' or '-filter:prefitoutliers:abs 0' to disable it. See notes on prefit outlier detectors below
- filter:trop**
 Estimate the troposphere of the station [default in PPP with carrier phase] ('--filter:trop' to disable it)
- filter:nav <nav>**
 <nav> = static Process supposing a static receiver [default in PPP]
 = kinematic Process supposing a moving receiver [default in SPP]
- filter:meas <meas>**
 <meas> = pseudorange Use only pseudorange for positioning
 = carrierphase Use pseudorange and carrier phase for positioning [default]
- filter:select <num> <meas1> <meas2> ...**
 Select the measurements or combinations to include in the filtering
 <num> = Number of measurements/combinations
 <measN> = List of measurements/combinations
 [Defaults]: PPP - Pseudorange => 1 PC
 [Defaults]: PPP - Carrierphase => 2 PC LC
 [Defaults]: SPP - Pseudorange => 1 C1C
 [Defaults]: SPP - Carrierphase => 2 C1C L1P
- filter:fixedweight <n> <a>** Apply the specified standard deviation to the measurement 'n', to be used as weight in the filter.
 <n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.
 <a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for the standard deviation of the measurement (metres)
 The filter shall apply as weight = $1/(\langle a \rangle^2)$
 Sample: '-filter:fixedweight 1 2' Set 2 metres of standard deviation to measurement 1 in filter
 '-filter:fixedweight 2 0.01' Set 1 centimetre of standard deviation to measurement 2 in filter
 Defaults: PPP: Pseudorange->1m Carrierphase->0.01m
 SPP: Pseudorange->5m Carrierphase->0.10m
- filter:fixedweightsat g#[-#] <n> <a>** Apply the specified standard deviation to a specific satellite of the measurement 'n'.
 g Character determining GNSS system (G->GPS)
 # PRN number. If #=0, it will be applied to all satellites of the selected GNSS system
 [-#] Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation)
 <n> Measurement number in the filter. If <n> is 0, it will be applied to all measurements in the filter.
 <a> = URA Use the URA value from the broadcast message (not valid in PPP)

= # Value for the standard deviation (in metres).
 The filter shall apply as weight = $1/(\langle a \rangle^2)$
 NOTE: When this option is provided, it will override any other sigmas provided by '-filter:fixedweight' or '-filter:elevweight' or the sigmas provided by SBAS or DGNSS

-filter:elevweight <n> <a> <c> Apply the specified values to compute the standard deviation of the measurement 'n'

$$\text{std} = a + b * e^{(-\text{elevation}/c)}$$
 <n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.
 <a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for minimum standard deviation of the measurement [weight at elevation 90 degrees] (metres)
 Multiplier to e [standard deviation at elevation 0 degrees] (metres)
 <c> Elevation constant (degrees)
 The filter shall apply as weight = $1/(\text{std}^2)$
 Sample (default values): '-filter:elevweight 1 0.13 0.53 10' Apply the standard deviation: $0.13+0.53 * e^{(-\text{elevation}/10)}$
 Note: '-filter:elevweight 1 x 0 y' equals to '-filter:fixedweight 1 x'

-filter:elevweightsat g#[-#] <n> <a> <c> Apply the specified values to a specific satellite to compute the standard deviation of measurement 'n'

$$\text{std} = a + b * e^{(-\text{elevation}/c)}$$
 g Character determining GNSS system (G->GPS)
 # PRN number. If #=0, it will be applied to all satellites of the selected GNSS system
 [-#] Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation)
 <n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.
 <a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for minimum standard deviation of the measurement [weight at elevation 90 degrees] (metres)
 Multiplier to e [standard deviation at elevation 0 degrees] (metres)
 <c> Elevation constant (degrees)
 The filter shall apply as weight = $1/(\text{std}^2)$
 Sample (default values): '-filter:elevweightsat G01 1 0.13 0.53 10' Apply the standard deviation: $0.13+0.53 * e^{(-\text{elevation}/10)}$
 Note: '-filter:elevweightsat g# 1 x 0 y' equals to '-filter:fixedweightsat g# 1 x'

-filter:sinelevweight <n> <a> Apply the specified values to compute the variance of the measurement 'n'

$$\text{std}^2 = a + b/((\sin(\text{elevation}))^2)$$
 <n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.
 <a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for minimum variance of the measurement (m^2)
 Multiplier to fraction (m^2)

The filter shall apply as $\text{weight} = 1/(\text{std}^2)$

Sample (default values): '-filter:sinelevweight 1 0 1' Apply the variance:
 $0+1/((\sin(\text{elevation}))^2)$

-filter:sinelevweightsat g#[-#] <n> <a> Apply the specified values to a specific satellite to compute the variance of the measurement 'n'

$\text{std}^2 = a + b/((\sin(\text{elevation}))^2)$

g Character determining GNSS system (G->GPS)

PRN number. If #=0, it will be applied to all satellites of the selected GNSS system

[-#] Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation)

<n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.

<a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for minimum variance of the measurement (m^2)

 Multiplier to fraction (m^2)

The filter shall apply as $\text{weight} = 1/(\text{std}^2)$

Sample (default values): '-filter:sinelevweight 1 0 1' Apply the variance:
 $0+1/((\sin(\text{elevation}))^2)$

-filter:snrweight <n> <a> Apply the specified values to compute the variance of the measurement 'n'

$\text{std}^2 = a + b * 10^{(-\text{SNR}/10)}$

<n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.

<a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for minimum variance of the measurement [weight at max SNR] (m^2)

 Multiplier to exponential [variance at SNR 0 dBHz] ($\text{m}^2 \cdot \text{Hz}$)

The filter shall apply as $\text{weight} = 1/(\text{std}^2)$

Sample (default L1): '-filter:snrweight 1 0 0.244' Apply the variance:
 $0+0.244*10^{(-\text{SNR}/10)}$

Sample (default L2): '-filter:snrweight 1 0.88E-6 0.77E-3' Apply the variance:
 $0.88E-6+0.77E-3*10^{(-\text{SNR}/10)}$

-filter:snrweightsat g#[-#] <n> <a> Apply the specified values to a specific satellite to compute the variance of the measurement 'n'

$\text{std}^2 = a + b * 10^{(-\text{SNR}/10)}$

g Character determining GNSS system (G->GPS)

PRN number. If #=0, it will be applied to all satellites of the selected GNSS system

[-#] Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation)

<n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.

<a> = URA Use the URA value from the broadcast message (not valid in PPP)
 = # Value for minimum variance of the measurement [weight at max SNR] (m^2)

**** Multiplier to exponential [variance at SNR 0 dBHz] ($m^2 \cdot Hz$)
 The filter shall apply as weight = $1/(std^2)$
 Sample (default L1): '-filter:snrweightsat G01 1 0 0.244' Apply the variance:
 $0 + 0.244 \cdot 10^{(-SNR/10)}$
 Sample (default L2): '-filter:snrweightsat G01 1 0.88E-6 0.77E-3' Apply the
 variance: $0.88E-6 + 0.77E-3 \cdot 10^{(-SNR/10)}$
**-filter:snrelevweight <n> <a> ** Apply the specified values to compute the variance of the
 measurement 'n'
 $std^2 = a + b \cdot 10^{(-SNR/10)} / ((\sin(elevation))^2)$
<n> Measurement number. If <n> is 0, it will be applied to all measurements
 in the filter.
<a> = URA Use the URA value from the broadcast message (not valid in
 PPP)
 = # Value for minimum variance of the measurement [weight at max
 SNR] (m^2)
**** Multiplier to exponential [variance at SNR 0 dBHz] ($m^2 \cdot Hz$)
 The filter shall apply as weight = $1/(std^2)$
 Sample: '-filter:snrelevweight 1 0 1' Apply the variance: $0 + 1 \cdot 10^{(-SNR/10)} / ((\sin(elevation))^2)$
**-filter:snrelevweightsat g#[-#] <n> <a> ** Apply the specified values to a specific satellite to
 compute the variance of the measurement 'n'
 $std^2 = a + b \cdot 10^{(-SNR/10)} / ((\sin(elevation))^2)$
g Character determining GNSS system (G->GPS)
PRN number. If #=0, it will be applied to all satellites of the selected
 GNSS system
[-#] Optionally, a minus sign ('-') and a second PRN number can be provided
 in order to set a range of satellites (of the same constellation)
<n> Measurement number. If <n> is 0, it will be applied to all measurements
 in the filter.
<a> = URA Use the URA value from the broadcast message (not valid in
 PPP)
 = # Value for minimum variance of the measurement [weight at max
 SNR] (m^2)
**** Multiplier to exponential [variance at SNR 0 dBHz] ($m^2 \cdot Hz$)
 The filter shall apply as weight = $1/(std^2)$
 Sample: '-filter:snrelevweightsat g# 1 0 1' Apply the variance: $0 + 1 \cdot 10^{(-SNR/10)} / ((\sin(elevation))^2)$
-filter:snrweight:comb <n> <val> When the weight is computed using any method involving
 the SNR (options '-filter:snrweight' or '-filter:snrelevweight'),
 when computing the weight for combinations, select how to get the
 SNR value:
<n> Measurement number. If <n> is 0, it will be applied to all
 measurements (which are combinations) in the filter.
<val> = SNR_i For a combination with frequencies ij, use SNR from
 measurement of frequency i
<val> = SNR_j For a combination with frequencies ij, use SNR from
 measurement of frequency j
<val> = MaxSNR Use the highest SNR of the two measurements used in
 the combination

<val> = MinSNR Use the lowest SNR of the two measurements used in the combination

<val> = MeanSNR Use the mean SNR value of the two measurements used in the combination [default]

0 <= <val> <= 1 If <val> is a number between [0,1], combine the SNR with the following formula:

$$\text{SNR} = \text{SNR}_i \cdot \langle \text{val} \rangle + \text{SNR}_j \cdot (1 - \langle \text{val} \rangle)$$

NOTE: For a combination with frequencies 'i' and 'j', 'i' is always the smallest frequency number and 'j' the highest, except for frequency '0', which will be always the highest (it is treated as frequency number '10').

For example, for combination PC12, i=1 and j=2. For combination LC10, i=1, j=0

-filter:snrweight:combsat g#[-#] <n> <val> When the weight is computed using any method involving the SNR (options '-filter:snrweight' or '-filter:snrelevweight'), when computing the weight for combinations for a specific satellite, select how to get the SNR value:

g Character determining GNSS system (G->GPS)

PRN number. If #=0, it will be applied to all satellites of the selected GNSS system

[-#] Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation)

<n> Measurement number. If <n> is 0, it will be applied to all measurements (which are combinations) in the filter.

<val> = SNR_i For a combination with frequencies ij, use SNR from measurement of frequency i

<val> = SNR_j For a combination with frequencies ij, use SNR from measurement of frequency j

<val> = MaxSNR Use the highest SNR of the two measurements used in the combination

<val> = MinSNR Use the lowest SNR of the two measurements used in the combination

<val> = MeanSNR Use the mean SNR value of the two measurements used in the combination [default]

0 <= <val> <= 1 If <val> is a number between (0,1), combine the SNR with the following formula:

$$\text{SNR} = \text{SNR}_i \cdot \langle \text{val} \rangle + \text{SNR}_j \cdot (1 - \langle \text{val} \rangle)$$

NOTE: For a combination with frequencies 'i' and 'j', 'i' is always the smallest frequency number and 'j' the highest,

except for frequency '0', which will be always the highest (it is treated as frequency number '10').

For example, for combination PC12, i=1 and j=2. For combination LC10, i=1, j=0

-filter:sbasdgnssweightmode <n> <val> In SBAS and DGNSS modes, select how the provided sigma is combined with the user selected weight computation mode (with options '-filter:fixedweight', '-filter:elevweight', '-filter:sinelevweight', '-filter:snrweight' and '-filter:snrelevweight')

<n> Measurement number. If <n> is 0, it will be applied to all measurements in the filter.

- <val> = ComputedOnly** Use only the variance computed with SBAS or DGNSS corrections [default if user does not select a weight method]
- <val> = ComputedPlusUser** Use the variance computed with SBAS or DGNSS corrections plus the sigma computed with the user selected weight method
- <val> = UserOnly** Use only the variance computed with the user selected weight method [default if user selects a weight method]
- filter:sbasdgnssweightmodesat g#[-#] <n> <val>** In SBAS and DGNSS modes, select how the provided sigma is combined with the user selected weight computation mode (with options '-filter:fixedweight', '-filter:elevweight', '-filter:sinelevweight', '-filter:snrweight' and '-filter:snrelevweight') to a specific satellite and measurement
- g** Character determining GNSS system (G->GPS)
- #** PRN number. If #=0, it will be applied to all satellites of the selected GNSS system
- [-#]** Optionally, a minus sign ('-') and a second PRN number can be provided in order to set a range of satellites (of the same constellation)
- <n>** Measurement number. If <n> is 0, it will be applied to all measurements in the filter.
- <val> = ComputedOnly** Use only the variance computed with SBAS or DGNSS corrections [default if user does not select a weight method]
- <val> = ComputedPlusUser** Use the variance computed with SBAS or DGNSS corrections plus the sigma computed with the user selected weight method
- <val> = UserOnly** Use only the variance computed with the user selected weight method [default if user selects a weight method]
- filter:phi:dr <val>** Specify the Phi value for position unknowns [defaults static:1 kinematic:0]
- filter:phi:clk <val>** Specify the Phi value for clock unknown [default 0]
- filter:phi:trop <val>** Specify the Phi value for troposphere unknown [default 1]
- filter:phi:amb <val>** Specify the Phi value for ambiguity unknowns [default 1]
- filter:q:dr <val>** Specify the Q noise value for position unknowns [defaults static:0 kinematic:1e8] (m²)
- filter:q:clk <val>** Specify the Q noise value for clock unknown [default 9e10] (m²)
- filter:q:trop <val>** Specify the Q noise variation value for troposphere unknown [default 1e-4] (m²/h)
- filter:q:amb <val>** Specify the Q noise value for ambiguity unknowns [default 0] (m²)
- filter:p0:dr <val>** Specify the P0 initial value for position unknowns [default 1e8] (m²)
- filter:p0:clk <val>** Specify the P0 initial value for clock unknown [default 9e10] (m²)
- filter:p0:trop <val>** Specify the P0 initial value for troposphere unknown [default 0.5²] (m²)
- filter:p0:amb <val>** Specify the P0 initial value for ambiguity unknowns (for prealigned carrier phases) [default 20²] (m²)
- filter:backward** Specify that the filter does a backward processing after the forward one is finished. This means that it processes the data backwards. The "turn point" is defined as the latest point where orbits and clocks are

- available or when the observation RINEX ends (whatever is first) ('--filter:backward' to disable it) [default disabled]
- filter:maxhdop <val>** Set the HDOP threshold (in metres) which will make gLAB do the following when the threshold is exceeded:
In SPP: Skip the epoch [default disabled]
In PPP: Skip the epoch [default 30.0]
In SBAS: It will try to switch mode or GEO (if allowed), otherwise it will skip the epoch [default disabled]
In DGNSS: Switch from DGNSS to SPP [default 30.0]
Use '--filter:maxhdop' to disable it
- filter:maxpdop <val>** Set the PDOP threshold (in metres) which will make gLAB do the following when the threshold is exceeded:
In SPP: Skip the epoch [default disabled]
In PPP: Skip the epoch [default 30.0]
In SBAS: It will try to switch mode or GEO (if allowed), otherwise it will skip the epoch [default disabled]
In DGNSS: Switch from DGNSS to SPP [default 30.0]
Use '--filter:maxgdop' to disable it
- filter:hdoporpdop** If HDOP and PDOP thresholds are enabled, set the option to only need to fulfill one the two requirements (HDOP or PDOP) instead of both (i.e. HDOP and PDOP conditions are ORed -logical OR-) [default disabled in all modes except in maritime SBAS mode]
- filter:maxgdop <val>** Set the GDOP threshold (in metres) which will make gLAB do the following when the threshold is exceeded:
In SPP: Skip the epoch [default disabled]
In PPP: Skip the epoch [default 30.0]
In SBAS: It will try to switch mode or GEO (if allowed), otherwise it will skip the epoch [default disabled]
In DGNSS: Switch from DGNSS to SPP [default 30.0]
Use '--filter:maxgdop' to disable it
- filter:stfdesa** Compute values for Stanford-ESA plot (only for SPP, SBAS and DGNSS) [default disabled]
The output data is written in a separate file (which has to be processed with graph.py). See parameter '-output:stfdesa'
- filter:stfdesaloi** If Stanford-ESA computation is enabled, write to file all geometries which produce an integrity ratio equal or higher than the horizontal or vertical thresholds (any of them). See parameters '-output:stfdesaloi' [default enabled]
- filter:stfdesa:xmax <val>** Set the maximum value for the horizontal axis (error axis, in metres) for Stanford-ESA plot [default 50]
- filter:stfdesa:yymax <val>** Set the maximum value for the vertical axis (protection level axis, in metres) for Stanford-ESA plot [default 50]
- filter:stfdesa:xres <val>** Set the horizontal resolution (error axis, in metres) for Stanford-ESA plot [default 0.1]
- filter:stfdesa:yres <val>** Set the vertical resolution (protection level axis, in metres) for Stanford-ESA plot [default 0.1]
- filter:stfdesa:hwir <val>** Set the horizontal integrity ratio threshold for which the geometry info will be written to file [default 0.7]

See parameters '-filter:stfdesaloi' and '-output:stfdesaloi' for more details.

-filter:stfdesa:vwir <val> Set the vertical integrity ratio threshold for which the geometry info will be written to file [default 0.7]

See parameters '-filter:stfdesaloi' and '-output:stfdesaloi' for more details.

OUTPUT OPTIONS

-output:file <file> Sets the output file [default stdout]

--output:file Sets the output to stdout [default]

-output:kml <file> Generate a KML file to be opened with Google Earth [default off]

-output:kml0 <file> Generate a KML file with all height set to 0 (ground projection) to be opened with Google Earth [default off]

-output:kml:egm96geoid Add geoid height from EGM96 model (used by Google Earth). Use '-output:kml:egm96geoid' to disable it. [default on]

-output:kml:refsta Add reference stations in KML file (in DGNSS mode only). Use '--output:kml:refsta' to disable it. [default on]

-output:kml:tstamp Add time stamp in KML file [default off]

-output:kml:tstampdec Decimation (in seconds) for time stamps in KML files [default 30]

-output:kml:tstamprange <val1> <val2> Set a time range for time stamps. Only during this time range KML timestamps will be written [default off]

<val1> Start epoch (in seconds of day). If "-" is given, it will be interpreted as the beginning of the file.

<val2> Start epoch (in seconds of day). If "-" is given, it will be interpreted as the end of the file.

If the observation file spans for more than one day, add an offset of 86400 seconds to the start or end epoch.

To set multiple ranges, set this parameters an number of ranges needed.

This parameter is combinable with '-output:kml:tstampdec' option

-output:sp3 <file> Generate a SP3 file with the computed coordinates [default off]

-output:sp3:letter Constellation letter to be written in the SP3 [default 'L']

-output:sp3:prn PRN number to be written in the SP3 [default '9']

-output:sp3:dgnssonly In DGNSS mode, do not write SPP solutions in the output SP3 file [default on]

--output:sp3:dgnssonly In DGNSS mode, write SPP solutions in the output SP3 file [default off]

-output:refpos <file> Generate a columnar text file with the computed coordinates [default off]

-output:refpos:doY Write timestamp as 'Year DoY SoD' in the output reference position text file [default on]

-output:refpos:gpsweek Write timestamp as 'GPSWeek SoW' in the output reference position text file [default off]

-output:refpos:caltime Write timestamp as 'Year/Month/Day HH:MM:SS.zzz' in the output reference position text file [default off]

-output:refpos:geodetic Write solution in WGS84 geodetic coordinates (Lon, Lat, Height), instead of WGS84 cartesian coordinates (X, Y, Z) [default off]

-output:refpos:dgnssonly In DGNSS mode, do not write SPP solutions in the output reference position text file [default on]

- output:refpos:dgnssonly In DGNSS mode, write SPP solutions in the output reference position text file [default off]
- output:rinx <file> Sets the RINEX output file name
- output:rinxversion <val>
 <val> = 2 Generates a RINEX v2.11 from the binary file RTCM v3.x
 <val> = 3 Generates a RINEX v3.00 from the binary file RTCM v3.x [default]
- output:corrections <file> Sets the ASCII Plain Text output file name for the corrections
- output:antenna <file> Sets the ASCII Plain Text output file name for the antenna information
- output:satvel <val>
 <val> = inertial Prints the inertial velocity in the messages where satellite velocity is given
 <val> = ITRF (ECEF) Prints the ECEF velocity in the messages where satellite velocity is given [default]
- output:rinxsb Generate a RINEX-B file from the SBAS data (only for SBAS) [default off]
- output:ems Generate a EMS file from the SBAS data (only for SBAS) [default off]
- output:pegasus Generate Pegasus file format from the SBAS data (only for SBAS). See notes on Pegasus format below. [default off]
- output:pegstricrinx When generating a RINEX-H file for Pegasus, follow the RINEX 2.11 rules for transmission time, health flag and URA (only active if -output:pegasus has been set) [default off]
- output:pegspace Set the field separator in Pegasus files to space character (' ') instead of a semicolon(';') [default off]
- output:pegfilealign Print Pegasus files with all columns aligned [default off]
- output:sbasdir <name> Set the directory where to write the output SBAS files ('.' for current directory) [default "SBAS"]
- output:stfdesa <file> Set the filename where to write the output data for Stanford-ESA plots [default "observationfilename_stdESA.txt"]
The output file is a columnar text file to be processed with graph program (with '--sf' parameter) for generating the Stanford-ESA plots
The first line of the output file contains, in this order the resolution in X axis (error), resolution in Y axis (protection level), maximum value in X axis and maximum value in Y axis. All the values are in metres.
From the second line until then end, each line contains, in this order, the X coordinate, Y coordinate (both in metres), the number of points in the horizontal component in that coordinate and the number of points in the vertical component in that coordinate.
See an example of the generated figures with graph program in the SBAS manual (file gLAB_SBAS_SUM.pdf)
Setting this option enables Stanford-ESA computation.
- output:stfdesaloi <file> Set the filename where to write the geometries of Stanford-ESA whose integrity ratio are over the horizontal or vertical integrity ratio (any of them). [default "observationfilename_stdESA_LOI.txt"]
This option sets enables the following parameter automatically: '-filter:stfdesaloi'.

-onlyconvert Convert EMS or RINEX-B file to RINEX-B, EMS or Pegasus and exit without processing any GNSS data [default off]
Incorrect messages from RINEX-B or EMS files are messages which grant any of these conditions:
CRC mismatch, invalid header, unknown message type, invalid time of applicability (time is over 86400 seconds)
In case of not setting '-output:rinex', '-output:corrections' and/or '-output:antenna' gLAB will set automatically a name for the output file[s].
These previous options are effective only if an RTCM file is converted. Therefore, there will be no RTCM converted files if the input RTCM file is processed
NOTE: A KML with a 1 second rate data and 1 second time stamp rate may be too big for Google Earth

VERBOSE OPTIONS (use -print:... to activate, --print:... to deactivate)

-print:info Print INFO messages [default on]
-print:cycleslips Print CS messages [default on]
-print:cs Equivalent to parameter '-print:cycleslips'
-print:input Print INPUT messages [default on for non SBAS processing, off for SBAS processing]
-print:meas Print MEAS messages [default off]
-print:model Print MODEL messages [default on for non SBAS processing, off for SBAS processing]
-print:satellites Print EPOCHSAT messages [default on for non SBAS processing, off for SBAS processing]
-print:epochsat Equivalent to parameter '-print:satellites'
-print:sat Equivalent to parameter '-print:satellites'
-print:prefit Print PREFIT messages [default on for non SBAS processing, off for SBAS processing]
-print:postfit Print POSTFIT messages [default on for non SBAS processing, off for SBAS processing]
-print:filter Print FILTER messages [default on for non SBAS processing, off for SBAS processing]
-print:output Print OUTPUT messages [default on]
-print:satdiff Print SATDIFF messages in comparison mode (see below) [default on]
-print:satstat Print SATSTAT messages in comparison mode (see below) [default on]
-print:satstattot Print SATSTATTOT messages in comparison mode (see below) [default on]
-print:satpvt Print SATPVT messages in show product mode (see below) [default on]
-print:satsel Print satellite selection information [default off for non SBAS processing, on for SBAS processing]
-print:sbascor Print SBASCORR messages (only for SBAS) [default off]
-print:sbascorr Equivalent to parameter '-print:sbascor'
-print:sbasvar Print SBASVAR messages (only for SBAS) [default off]
-print:sbasiono Print SBASIONO messages (only for SBAS) [default off]

-print:sbasout	Print SBASOUT messages (only for SBAS) [default on]
-print:sbasunsel	Print SBASUNSEL messages (only for SBAS) [default off]
-print:sbasunused	Print messages from discarded satellites due to SBAS GEO switch (only for SBAS) [default off] The discarded messages are MODEL, SBASCORR, SBASVAR, SBASIONO and SBASUNSEL, but only the ones selected from user parameters will be printed. Also, an asterisk '*' will be added at the end of the first field to indicate that it is a discarded measurement
-print:usererror	Print user added error to raw measurements [default on]
-print:dgnss	Print DGNSS global information (only for DGNSS) [default on]
-print:dgnssunused	Print messages from discarded satellites due to GDOP switch (from DGNSS to SPP) [default off] An asterisk '*' will be added at the end of the first field to indicate that it is a discarded measurement
-print:summary	Print a summary at the end of the files with the statistics of the processing [default on]
-print:progress	Print to terminal the current epoch being processed [default on]
-print:all	Print all messages
-print:none	Do not print anything More information on print messages can be seen with the '-messages' option

SUMMARY OPTIONS

When processing in SPP/PPP/SBAS/DGNSS corrections, if summary enabled a statistical summary will be printed at the end of the output file. If receiver position is not fixed, error percentiles messages will not be shown. The options for generating this summary are:

-summary:percentile <val>	Sets the value for computing the error and protection level percentile [default 95]
-summary:waitfordaystart	If the observation file starts at 22 hours or later, gLAB will assume that from the first epoch until epoch 23 hours 59 minutes 59 seconds are given just to fill the SBAS message buffer and wait for the smoothing and filter converge, and the following epochs from the next day are the ones of interest. During this convergence period, Stanford-ESA values will not be computed and they will not be taken into account for the SBAS summary. This option is useful to avoid false MIs or high error epoch in the summary during the convergence time. [default on] This option can be disabled with '--sbassummary:waitfordaystart' NOTE: The computation of the continuity risk takes into account the sampling rate and data gaps in the observation file. NOTE: The last line of the SBAS summary contains all the values of the previous lines along with the station coordinates. This line is useful for plotting world maps with data from each station. NOTE: An example of a SBAS summary can be seen executing gLAB with '-messages' parameter

- summary:starttime <date> Set the first epoch to be used in the SBAS summary. See parameter '-pre:starttime' for details on date format
- summary:stationnetworkname <name>
Sets the station network name to be printed in the last line of summary. This is useful for doing stations maps with each station network having different marker type, colour or size with the graphical tool (after merging the last line of the summary of several processedstations in a single file) [default 'Other']

ADDITIONAL SUMMARY OPTIONS FOR SBAS

In SBAS mode, there are additional options for the summary:

- summary:hal <val> Sets the Horizontal Alarm Limit (in metres) for computing availability and continuity risk [default 40]
- summary:val <val> Sets the Vertical Alarm Limit (in metres) for computing availability and continuity risk [default 50]
- summary>window size <val>
Sets the sliding window size (in epochs) for computing the continuity risk [default 15]
- summary>window size mar <val>
Sets the fixed window size (in epochs) for computing the continuity risk [default 15]

NOTE: The computation of the continuity risk takes into account the sampling rate and data gaps in the observation file.

SBAS PLOTS OPTIONS

This mode is activated when only a navigation file and a SBAS file are given (see description below in WORK MODES).

The following options are specific for this mode:

- sbasplots:minlat <val> Sets the minimum latitude (in degrees) for the SBAS plots. The minimum resolution is 0.01 [default 25.0]
- sbasplots:maxlat <val> Sets the maximum latitude (in degrees) for the SBAS plots. The minimum resolution is 0.01 [default 70.0]
- sbasplots:minlon <val> Sets the minimum longitude (in degrees) for the SBAS plots. The minimum resolution is 0.01 [default -30.0]
- sbasplots:maxlon <val> Sets the maximum longitude (in degrees) for the SBAS plots. The minimum resolution is 0.01 [default 40.0]
- sbasplots:plotarea <minlon> <maxlon> <minlat> <maxlat>
This parameter is a shorter way to provide the same values as in '-sbasplots:minlon' '-sbasplots:maxlon', '-sbasplots:minlat' and '-sbasplots:maxlat' parameters.
- sbasplots:recheight <val>
Sets the receiver height (in metres) [default 0 (at sea level)]
- sbasplots:hal <val> Sets the Horizontal Alarm Limit (in metres) for computing the Availability plots [default 40]
- sbasplots:val <val> Sets the Vertical Alarm Limit (in metres) for computing the Availability plots [default 50]
- sbasplots:availstep <val>

- Sets the resolution (in degrees) for both longitude and latitude for Availability and Continuity Risk maps. The minimum resolution is 0.01 [default 1.0]
- sbasplots:ionostep <val> Sets the resolution (in degrees) for both longitude and latitude for Ionosphere Corrections Availability map. The minimum resolution is 0.01 [default 0.3]
- sbasplots:ionotimestep <val> Sets the time step (in seconds) for ionosphere availability plot [default 300]
- sbasplots>windowsize <val> Sets the sliding window size (in seconds) for computing the continuity risk [default 15]
- sbasplots>windowsizeimar <val> Sets the fixed window size (in seconds) for computing the continuity risk [default 15]
- output:sbasavailplots <file> Sets the output file for the SBAS Availability plots data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASAvailPlots_sbasfilename.txt"]
- output:sbasriskplots <file> Sets the output file for the SBAS Continuity Risk plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASRiskPlots_sbasfilename.txt"]
- output:sbasriskmarplots <file> Sets the output file for the SBAS Maritime Continuity Risk plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASRiskMarPlots_sbasfilename.txt"]
- output:sbasionoplots <file> Sets the output file for the SBAS Ionosphere availability plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASLonoPlots_sbasfilename.txt"]
- output:sbasriskdisc <file> Sets the output file for the list of SBAS solution discontinuities found during the computation of SBAS Continuity Risk plot. The output file is a columnar text file [default "SBASRiskDisc_sbasfilename.txt"]
- output:sbashdopplots <file> Sets the output file for the SBAS HDOP plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASHDOPPlots_sbasfilename.txt"]
- output:sbaspdopplots <file> Sets the output file for the SBAS PDOP plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASPDOPPlots_sbasfilename.txt"]
- output:sbasgdopplots <file> Sets the output file for the SBAS GDOP plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASGDOPPlots_sbasfilename.txt"]

- output:sbascombdopplots <file> Sets the output file for the xombined SBAS HDOP, PDOP and GDOP plot data. The output file is a columnar text file to be processed by graph program (with '--sbas' parameter) [default "SBASCombDOPPlots_sbasfilename.txt"]
- sbasplots:doppercentile Enable computation of DOP percentile for DOP maps. Warning: Each DOP map requires around 2GB of memory (with the default map size) [default off]
- sbasplots:percentile <val> Sets the value for computing the percentile in DOP maps [default 95]
- sbasplots:hourlymaps Print the hourly availability maps. The files will have the same name as the daily maps, but with '_HHh' added before the file extension (being HH the hour with two digits)
- sbasplots:noavailplot Do not compute the SBAS Availability and Continuity Risk plots [default off]
- sbasplots:noriskplot Do not compute the SBAS Continuity Risk plot [default off]
- sbasplots:noriskmarplot Do not compute the SBAS Maritime Continuity Risk plot [default off]
- sbasplots:noionoplot Do not compute the SBAS Ionosphere corrections availability plot [default off]
- sbasplots:noionomodel Do not use SBAS ionosphere during the computation of Availability and Continuity Risk plot [default off]
This parameter is equivalent to '-model:iono no'

`-sbasplots:exclusionarea <minlon> <maxlon> <minlat> <maxlat>`

Set a square area where SBAS availability and SBAS iono availability will be set to 0 (the area is skipped during computation) This is useful when processing large areas (e.g. areas with multiple SBAS and want to exclude the sea between them)

The user can set any number of exclusion area by providing this parameter as many times as necessary

The area must be given with these four values (in this order): minimum longitude, maximum longitude, minimum latitude, maximum latitude. The four values must be in degrees, with the longitude between -180 and 180 degrees, and the latitude between -90 and 90 degrees

`-sbasplots:inclusionarea <minlon> <maxlon> <minlat> <maxlat>`

Set a square area where SBAS availability and SBAS iono availability will be computed (the rest is skipped). This area must be inside the region defined by parameters '`-sbasplots:minlon`', '`-sbasplots:maxlon`', '`-sbasplots:minlat`' and '`-sbasplots:maxlat`'.

The user can set any number of inclusion area by providing this parameter as many times as necessary

The area must be given with these four values (in this order): minimum longitude, maximum longitude, minimum latitude, maximum latitude. The four values must be in degrees, with the longitude between -180 and 180 degrees, and the latitude between -90 and 90 degrees

If both inclusion and exclusion areas are provided, then an area which is processed must be inside of any inclusion area and outside of any exclusion area.

The default region defined in gLAB corresponds to EGNOS coverage area. The available output messages in this mode are INFO [default on], SBASIONO [default off] and SBASUNSEL [default off]

Most of the options applied for normal SBAS processing can also be applied for this mode, except for those which apply to measurement corrections (due to there are none in this mode) and the option to use Klobuchar while solution converges ('`-model:initcoordNPA`') as we consider we are always in strict PA mode. An example of the generated figures with graph program is in the SBAS manual (file `gLAB_SBAS_SUM.pdf`)

DATE CONVERSION OPTIONS

This mode is for converting a date format to all other GNSS date formats and exit.

The accepted date formats are: YYYY/MM/DD HH:MM:SS.zzz ('zzz' are milliseconds), Year/DoY/SoD, GPSWeek/SoW, MJDN/SoD (MJDN is Modified Julian Day Number)

Minimum accepted date is 1980/01/06 (YYYY/MM/DD) or 1980/006 (Year/DoY) or 0/0 (GPSWeek/SoW) or 44244/0 (MJDN/SoD)

This mode is activated when any of the following parameter is provided:

- dateconv:calendar <year> <month_number> <day> <hour> <minute> <seconds>
<year> has to be equal or greater than 1980, <hour> is in 24 hour format and <seconds> can have decimal values.
- dateconv:doy <year> <DoY> <SoD>
<year> has to be equal or greater than 1980, <DoY> is in range 1 to 366.
- dateconv:gpsweek <GPSWeek> <SoW>
- dateconv:mjdn <MJDN> <SoD>
<MJDN> must be equal or greater than 44244.

COORDINATE CONVERSION OPTIONS

This mode is for converting a coordinate system to all supported coordinate systems (cartesian, geodetic -or ellipsoidal- and spherical) and exit.

This mode is activated when any of the following parameter is provided:

- coordconv:cartesian <x> <y> <z>
X, Y and Z coordinates unit is metres.
- coordconv:geodetic <lon> <lat> <height>
Longitude is in degrees (range [-180..180]), latitude is in degrees (range [-90..90]) and height is in metres.
- coordconv:spherical <lon> <lat> <radius>
Longitude is in degrees (range [-180..180]), latitude is in degrees (range [-90..90]) and radius is in metres.

WORK MODES

gLAB can work in six different modes:

- Positioning Mode: 'Standard' mode, where all the processing is done, and a solution for a receiver is provided as OUTPUT messages. The minimum parameters required for this mode are an input observation file ('-input:obs') and orbit and clock products ('-input:nav', '-input:sp3' or '-input:orb'/'-input:clk'). Using precise products will also require the use of an ANTEX file ('-input:ant'). For SBAS processing, an additional input SBAS file ('-input:sbas') is needed. For DGNSS processing, an additional input file ('-input:dgnss' or '-input:rtcm') is needed
- Show Input Mode: This mode only reads an input RINEX observation file and print its measurements. The parameter required for this mode is '-input:obs', and specifically, no orbit and clock products should be provided (if provided, gLAB will switch to Positioning Mode)
- Product Comparison Mode: This mode reads and compares two different sources of orbit and clock products. In order to use this mode, '-input:obs' must be avoided, and two different orbit and clock products should be provided. This mode outputs the SATDIFF, SATSTAT and STASTATTOT messages
- Show Product Mode: This mode reads a single source of orbit and clock products. In order to use this mode, '-input:obs' must be avoided, and a single orbit and clock product should be provided. This mode output SAT messages
- Convert mode: Only for SBAS. If the parameter '-onlyconvert' is given, gLAB will just generate a RINEX-B 2.11 or EMS or Pegasus files (depending on the parameters) and it will not process any GNSS data. The minimum parameters for this mode are an SBAS file ('-input:sbas'), the '-onlyconvert' parameter and an output file format ('-output:rinxeb', '-output:ems', '-output:pegasus')

- SBAS Plots Mode: This mode is activated when only a navigation file and a SBAS file are given. In this mode, three plots are computed: SBAS Availability, SBAS Continuity Risk and SBAS Ionosphere Corrections Availability. The three plots are computed in PA mode in the delimited (squared) region and resolution during one day (the Availability and Continuity Risk are computed at a one second rate, while the Ionosphere Corrections Availability is computed at a 300 seconds rate by default). For the three plots the values are computed for a Fault-Free receiver (no data gaps, no cycle-slips). For SBAS Availability plot, an epoch at a given latitude and longitude and height (by default is sea level -0 metres-) is considered to be available when both the Horizontal and Vertical Protection Levels are below their respective thresholds. For SBAS Continuity Risk plot, it is computed the probability of having a discontinuity (i.e. no SBAS PA solution) during the next 15 seconds (i.e. using a sliding window of 15 seconds). For SBAS Ionosphere Corrections Availability plot, each coordinate in the map is considered as a pierce point at 350 km height, and it is considered as available when a SBAS ionosphere can be computed at the given pierce point. The minimum parameters to activate this mode are the input navigation file ('-input:nav') and the input SBAS message file ('-input:sbas'). The output files have to be processed with graph program (with '--sbas' parameter) in order to generate the plots. The available output messages in this mode are INFO [default on], SBASIONO [default off] and SBASUNSEL [default off]. NOTE: With the default configuration, the computation time is around 2 hours. Increasing resolution or map size will significantly increase computation time
- Date Conversion: When '-dateconv:calendar' or '-dateconv:doy' or '-dateconv:gpsweek' or '-dateconv:mjdn' are provided, gLAB will read the date from user input and convert it to all other date formats, print them in screen and exit.
- Coordinate Conversion: When '-coordconv:cartesian' or '-coordconv:geodetic' or '-coordconv:spherical' are provided, gLAB will read the coordinates from user input and convert it to all other coordinate systems, print them in screen and exit.

NOTES FOR PEGASUS OUTPUT FORMAT

Pegasus is GNSS data processing from Eurocontrol. Pegasus does not read the RINEX-B or EMS SBAS files, it converts them to columnar text files and later processes with these text files. Each text file contains one message type -except for fast correction messages, which are all grouped in the same file; and the GEO navigation data, which is RINEX 2 format-.

Each columnar text file has a header line with the name of each value, and the values are printed in decimal format.

A full explanation of the Pegasus format can be found in appendixes I.5-I.16 in their ICD at <http://www.icao.int/Meetings/AMC/MA/2004/GNSS/icd.pdf>

NOTES FOR PREPROCESSING

Pseudorange Jumps: Some receivers, after updating the clock, they adjust the code but not the carrier phase measurement, producing a jump in the code but not in the carrier phase. Therefore, code and carrier phase are not consistent (the difference between code and carrier phase is not continuous). If the carrier phase is not adjusted, it will be detected as a cycle-slip.

NOTES FOR SBAS PROCESSING

When processing with SBAS corrections, gLAB will use MOPS-D standard values (see AD-07) and configuration by default

Most of these parameters and configuration can be modified by the user, regardless if these parameters are MOPS compliant or not.

The specific SBAS parameters that can be modified by the user are:

- **Smoothing:** Can be disabled or changed the number of epochs [default 100 epochs]
- **Steady-state:** Can be disabled or changed the number of epochs [default 360 epochs]
- **Ionosphere:** Any ionosphere model available in gLAB (e.g. IONEX) can be applied instead of the SBAS ionosphere model.
- **Time outs:** Time outs for all corrections can be user defined
- **Mode switch:** Switching from PA to NPA can be enabled or disabled [default disabled]
- **GEO switch:** GEO switching can be enabled or disabled [default disabled]. Furthermore, after a GEO switch, the user can decide if to stay in the new GEO or try to fallback to the initial GEO when possible.
- **Decimation:** gLAB can process at any data rate. In order to keep integrity of results with 1Hz SBAS data rate, messages will be read every second, and special events will be handled every second.
- **The special events are:** receive an alarm message or an UDREI \geq 14, miss 4 consecutive messages or receive 4 consecutive messages with wrong CRC. Decimation is useful for studying slow varying corrections, such as long term corrections or ionosphere.

Navigation: Both kinematic and static navigation mode can be selected. Default is kinematic.

Mode and GEO switch notes:

- If both mode and GEO switch are enabled, GEO switch is tried first always, as switching GEO keeps PA mode.
- If option '-model:geofallback' is enabled, gLAB will try to switch to the first GEO used in processing after the time between switches (defined by parameter '-model:switchtime') after a GEO switch occurs.
- If option '-model:maintaingeo' is enabled gLAB will maintain the current GEO (independently if it was selected by the user or by a GEO switch) during all the processing while it can provide a PA solution.
- If both options '-model:maintaingeo' and '-model:geofallback' are enabled, '-model:geofallback' option behaviour will prevail.
- If both options '-model:maintaingeo' and '-model:geofallback' are disabled, after a GEO switch, gLAB will try to switch to the previous GEO independently if it was the first one used or not. If there are only two GEOs available (and the use of mixed GEO data is disabled), this behaviour is equivalent as in the '-model:geofallback' option, due to the previous GEO will be always the first GEO used.

SBAS Maritime mode:

Maritime mode is a special configuration for SBAS. In this configuration, message type 10 (degradation parameters), type 27 (service message)

and type 28 (clock ephemeris covariance matrix) are not used. Therefore, the sigma of fast and long term corrections is computed with the following formula:

$$\text{Sigmaflt} = \text{SigmaUDRE} + 8 \text{ (all units are in metres)}$$

Also, alarm limits in maritime mode are not used (in gLAB alarm limits cannot be disabled, so they are set to 100Km), and a filter for HDOP (Horizontal Dilution of Precision) and PDOP (Position Dilution of Precision). A valid epoch must have a HDOP<4 or a PDOP<6 (it only needs to fulfil one of these two conditions).

Furthermore, for maritime mode, another mode for computing the continuity risk is used. Instead of a sliding windows of 15 seconds, it is used a fixed window of 15 minutes (900 seconds). That is, every time a discontinuity event occurs, it will affect the previous 15 minutes, independently if there had been a discontinuity within the previous 15 minutes (where as in aviation mode, each discontinuity only affects the last seconds until the previous discontinuity -up to the window size-). This is an optimistic computation of the continuity risk, but maritime mode has more relaxed requirements, as seen above. If desired, the user can change the size of the 15 minute window to any value. The disadvantages of this mode of continuity risk computation are that if several discontinuities occur in a time span smaller than the window size (which usually happens in the SBAS coverage border), then epochs with discontinuities may be counted more than one, which may do that the continuity risk ends up being greater than 1 (this effect can be mitigated by using large time spans). The other disadvantage is that if some discontinuities occur but each of them have a duration larger than the window size, the total continuity risk will be much smaller compared to the aviation continuity risk, as only the epochs of the size of the window will be counted for the discontinuity, but the other epochs in a discontinuity but greater than the window will not be counted. This effect is also maximized as the continuity risk is computed using the number of epochs processed, not the number of epochs with solution in PA mode.

The formula to compute the maritime continuity risk is:

$$\begin{aligned}\text{Maritime Continuity Risk} &= \text{CTI}/\text{MTBF} \\ &= \text{Window_Size}/(\text{Num}_{\text{EpochsProcessed}}/\text{Num}_{\text{Discontinuities}}) \\ &= \text{Window_Size} * \text{Num}_{\text{Discontinuities}}/\text{Num}_{\text{EpochsProcessed}}\end{aligned}$$

Where:

CTF: Continuity Time Interval, which is the window size

MTBF: Mean Time Between Failures, which is computed as the total epochs processed divided by the number of discontinuities

This formula is from IALA (International Association of Marine Aids to Navigation and Lighthouse Authorities), available in the following document:

<http://www.iala-aism.org/product/performance-and-monitoring-of-dgnss-services-in-the-frequency-band-283-5-325khz-1112/>

Maritime mode is configured with parameter '-model:sbasmaritime', which is a shortcut for providing these parameters: '-model:nomt10', '-model:nomt2728', '-model:geoswitch', '-filter:maxhdop 4', '-filter:maxpdop 6', '-filter:hdoporpdop', '-summary:hal 100000', '-summary:val 100000', '-summary>window size 900' and '-summary>window size mar 900'.

Furthermore, parameter '-model:sbasmaritime' will also set maritime options in SBAS plots mode.

NOTES FOR DOP MAPS:

When computing the mean and percentile in DOP maps, since version 5.4.0, only the epochs whose protection levels are below the alarm limits are used. In version 5.3.0, any epoch with solution, independently of the protection levels, was always taken into account for the mean and percentile computation. In this case, if an epoch had a very big DOP (e.g. more than 1 million), this value (a clear outlier) would totally bias the mean value to a higher value.

NOTES FOR SBAS PLOTS:

See option '-sbasplotsinfo' for detailed help on how to generate SBAS plots.

NOTES FOR PREFIT OUTLIER DETECTION

There are two prefit outlier detectors in gLAB:

- Prefit outlier detector comparing against the median (by default disabled):

The procedure for this detector is:

Compute the median of all prefits

For each satellite:

Compute absolute value of the difference between the prefit and the median

If the difference is higher than the threshold, unselect the satellite

- Prefit outlier detector comparing the absolute values (by default disabled):

The procedure for this detector is:

For each satellite available:

Compute the absolute value of its prefit (ReferencePrefit)

Set a range for all other satellite prefits defined as:

Range=[abs(ReferencePrefit)-threshold,abs(ReferencePrefit)+threshold]

For each satellite (except the reference one):

Check if prefits are inside the range

If half or more of the satellites are invalid, then the current satellite is an outlier

Else discard the satellites with prefits outside the range.

If receiver position is fixed, gLAB will allow the outlier detector to discard all satellites in the current epoch

If receiver position is not fixed, if more than half of the available satellites are discarded, then, the prefit outlier detector will not discard any satellite, as it will assume that the solution still has to converge

A recommended value for the thresholds of the prefit outlier detectors is 30 metres

NOTES FOR DGNSS PROCESSING

Sigma inflation: During the transient period until the smoother converges, the measurement noise sigma is inflated according to the next equation:

$\text{Sigma_inflat} = f(n)/f(N\text{stdy}) * \text{sigma}$

$n < N \quad f(n) = \sqrt{1/n}$

$n \geq N \quad f(n) = \sqrt{1/(2*N-1) * (1 + ((N-1)/N)^{2*(n-N)+1})}$

where:

n: number of processed samples

N: number of samples of the smoothing window

Nstdy: number of samples when reaching the steady state: In gLAB, $N\text{stdy} = (\text{int})(3.6*N)$

For instance, with 1 second sampling rate and $N=100$, the stationary state (Nstdy) is assumed to be reached after 360 seconds

5.1 PROCESSING EXAMPLE

The following example gives an overview of a simple processing using the gLAB DPC component. The sample covers a precise static positioning to obtain the precise coordinates of a station and provides exactly the same results as the sample generated in section 4.5.

Opening a command line window in the gLAB directory (in Windows this can be directly done by the option “Command line in directory” in the program group installed in the Start menu). Using this option a command line window will open (Figure 5-1) in the proper directory.

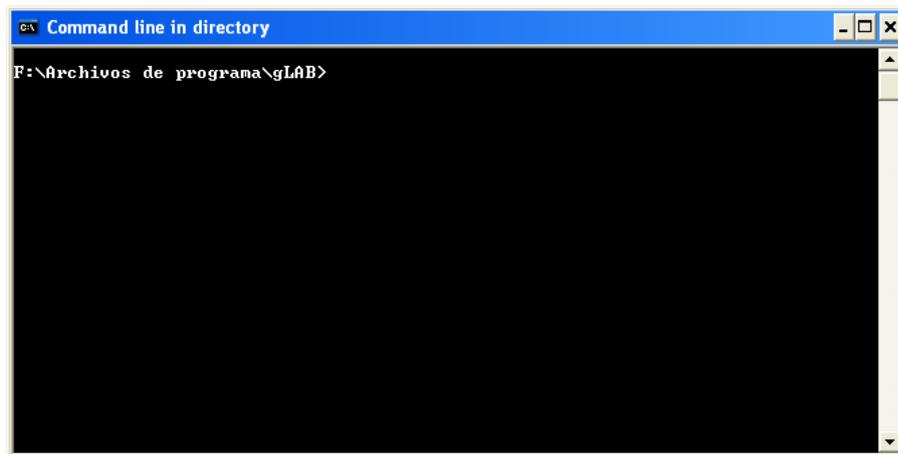


Figure 5-1: Command line screenshot

In order to generate the selected processing, the following command should be executed:

```
win\gLAB.exe -input:obs test\madr2000.06o -input:ant  
test\igs_pre1400.atx -input:SP3 test\igs13843.SP3 -output  
gLAB_DPC.out
```

After a few seconds the file “gLAB_DPC.out” will be generated with the all the output details.

6 gLAB DATA ANALYSIS TOOL (DAT)

The DAT is an advanced plotting utility prepared to graph different combinations of columns taking into account several user-defined conditions. Figure 6-1 shows a screenshot of the DAT.

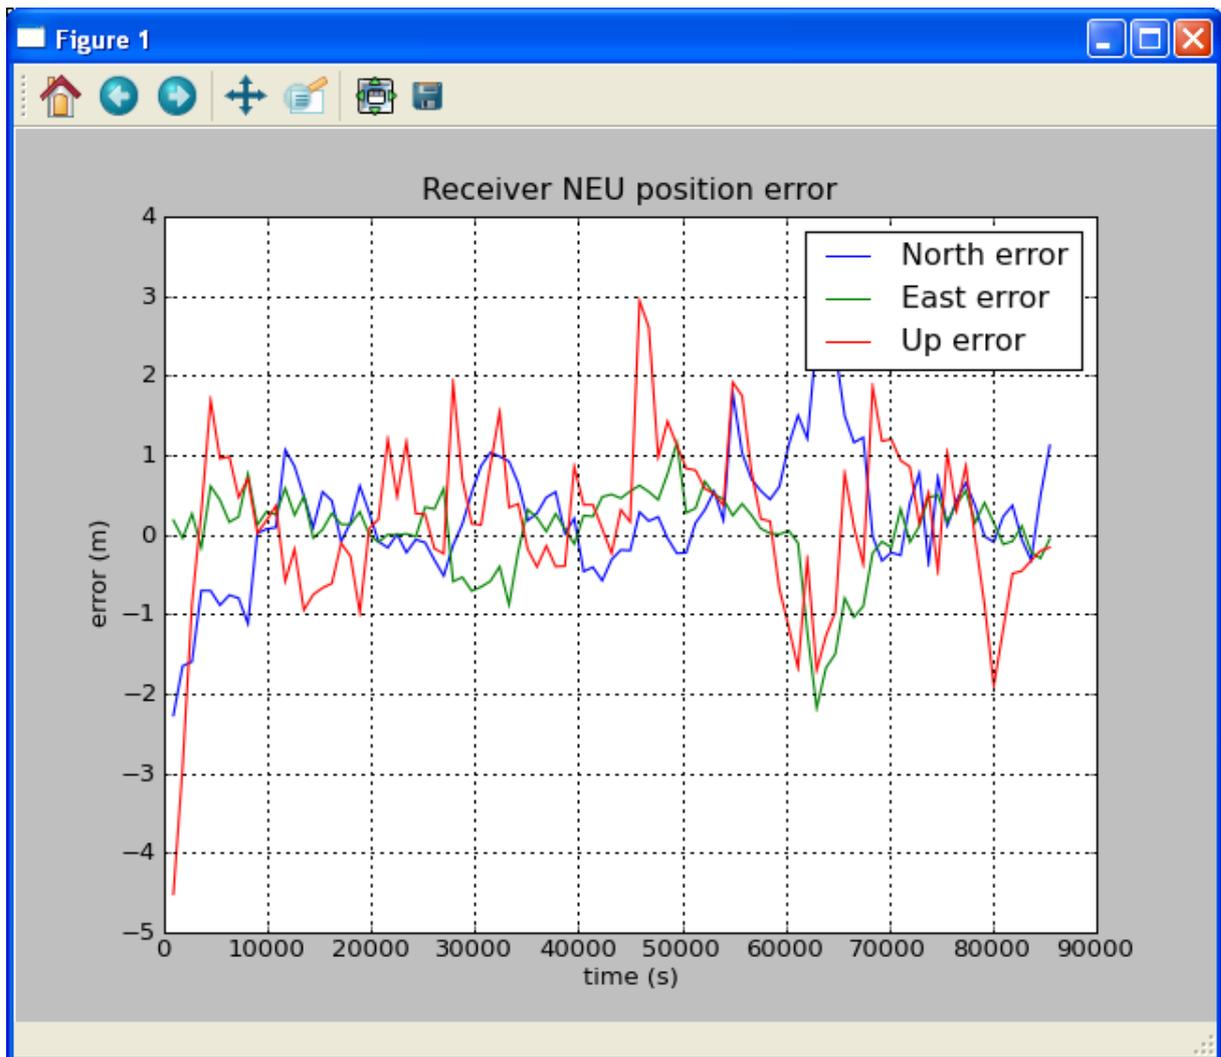


Figure 6-1: DAT screenshot. It can be seen the position error for a PPP kinematic positioning for a single-frequency receiver.

- `--XTicksList, --xtickslist, #,#,...` Set the list of ticks for x axis. The list does not to be ordered and must be comma (',') separated. (this parameter is incompatible `--Xticks` and `--XticksStep`).
- `--xtl`
- `--YTicksList, --ytickslist, #,#,...` Set the list of ticks for y axis. The list does not to be ordered and must be comma (',') separated. (this parameter is incompatible `--Yticks` and `--YticksStep`).
- `--ytl`
- `--Ftitle, --ftitle, --ft <text>` Add a fractional title to the upper left corner.
- `--wm, --watermark <text>` Add a watermark with the given text.
- `--wmc, --watermarkcolor <colour>` Sets the watermark colour [DEFAULT 'black']. See option '`--color`' for the full list of colours.
- `--wms, --watermarksize #` Set the size of the watermark text [DEFAULT 8]
- `--wmp, --watermarkposition #,#` Set the X and Y position of the watermark. The Position must be given relative to the lower left corner of the plot, and with the X and Y values given a comma (',') separated string. For example, to set the default position of the watermark in SBAS plots (lower right corner), the parameter values should be provided as ".87,.03"
- `--textmark <text>` Add an text mark with the given text. For adding multiple text marks, set this option as many times as necessary
- `--textmarkc, <colour>` Sets the text mark colour [DEFAULT 'black']. Set this option for each text mark set with option '`--textmark`'. See option '`--color`' for the full list of colours.
- `--textmarkcolor`
- `--textmarks, --textmarksizes #` Set the size of the text mark [DEFAULT 10]. Set this option for each annotation text set with option '`--textmark`'.
- `--textmarkp, #,#` Set the X and Y position of the text mark. Set this option for each annotation text set with option '`--textmark`'. The position must be given relative to the lower left corner of the plot, and with the X and Y values given a comma (',') separated string. For example, to set the default position of the text mark in the center of the image, the parameter values should be provided as ".5,.5"
- `--textmarkposition`
- `--atm, --adjusttomargin` Expand the figure to fit the image margin (works for python versions greater or equal to 2.7).
- `--AdjustToMargin`

`--no-lock-file` Do not create the ".plot.lock" file. This file is necessary to synchronize graph.py with the GUI, but not in command line. This option is recommended when multiple instances of this tool are executed in parallel.

`--colormap, <colourmapname>` Set the colour map used [DEFAULT: 'jet']
`--ColorMap` See full list of colormaps in the following link:
<https://matplotlib.org/users/colormaps.html>

PLOT DEPENDENT OPTIONS (default options):

The Plot Dependent Options are specific to each plot.
One new plot is considered from the point that a '-f' or '--file' is found.
All the options coming after this parameter belong to that specific plot.

`-f, --file <file>` Set the input file name for the specific plot.

`-x, -X, --Xcol <val>` Set the source of the x axis:
`-x 4` or `-x '$4'` : will take as x axis the 4th column of the input file.

Operations can be done in this parameter, such as:
`-x '$4-$5'`: This will take the difference between the 4th and the 5th column

Mathematical functions and constants are supported:
`-x '(math.sin($12*math.pi/180))'`

`-y, -Y, --Ycol <val>` Set the source of the y axis
Identical properties as x column

`-c, --cond <condition>` Specify the plotting condition:
`-c '$6>=10'` Include the 6th column if it is equal or greater than 10

`-c '$1=="OUTPUT"'` Include the 1st column by a specific string: surrounding the string by "

Mathematical functions, booleans and constants are supported:
`-c '$1=="POSTFIT"&(math.e($12+$5)>5.0)'`

NOTE: Windows users have to exchange the ' for " and the " for ' when specifying a condition. For example, the following condition:

`-c '$1=="POSTFIT"&(math.e($12+$5)>5.0)'`

is valid in Linux, but in Windows it should be written like this:

`-c "($1=='POSTFIT')&(math.e($12+$5)>5.0)"`

`-l, --label, --plotlabel <text>` Enables the label for the current plot

`--npl, --numpointslabel #` Set the number of points to be shown in the label.
If no value is provided, it is set to 2 [DEFAULT]

`--lp, --labelpos, --labelPos <val>`

Set the position of the label in the plot.

The following values are supported:

'tl' top left

'tc' top center

'tr' top right [DEFAULT]

'bl' bottom left

'bc' bottom center

'br' bottom right

'cl' center left

'c' center

'cr' center right

'coordX,coordY' user defined position

coordX values must be between [-0.05,1.3]

coordY values must be between [-0.05,1.15]

`-s, --style <style>` Sets the style for the current plot
The following styles are supported:

'.' circle marker [DEFAULT]

'-' solid line style

'--' dashed line style

'-.' dash-dot line style

'.-' dots joined with lines

'o' point marker

's' square marker

'p' pentagon marker

'+' plus marker

'x' x marker

'^' triangle up marker

'>' triangle right marker

'<' triangle left marker

'v' triangle down marker

'*' star marker

'h' hexagon1 marker (top part with edge)

'H' hexagon2 marker (top part straight)

'D' diamond marker

'd' thin diamond marker

'|' vertical line marker

'_' horizontal line marker

'1' tri_down marker

'2' tri_up marker

'3' tri_left marker

'4' tri_right marker

For a full list of styles, see http://matplotlib.org/api/pyplot_api.html#matplotlib.pyplot.plot

`--color, --cl <color>` Sets the colour for the current plot
The following colours are supported:
'b' blue [DEFAULT]
'g' green
'r' red
'c' cyan
'm' magenta
'y' yellow
'k' black
'w' white

For a full list of colours, see http://matplotlib.org/api/pyplot_api.html#matplotlib.pyplot.plot

`--markersize, --ms #` Sets the plot maker size 5 by [DEFAULT]
`--linewidth, --lw #` Sets the plot maker size 0 by [DEFAULT]
`-g, --grid <val>` Set the plot with grid by [DEFAULT]
It could be turn off by 'off' or 'no'

Example:

```
graph.py -f /home/gLAB/Example -x '(math.sin($1*math.pi/180))' -y 2  
-l "Plot Label" --style p --color cyan
```

MULTIPLE PLOTS:

Each graphic window can contain several plots. One new plot is considered from the point that a '-f' or '--file' is found:

Graphic General Options: will apply to all the plots present
Plot Dependent options: parameters specific to each plot.

Example:

```
graph.py -f /home/gLAB/Example -x '1' -y '2' -f /home/gLAB/Example -x '2' -y '1'
```

SAVE CURRENT GRAPHIC:

User can save the entire graphic window into the path specified. If no path is specified, it will be allocated in the current working directory.
The graphic output format is deduced from the extension of the file name, if no extension is provided a 'png' extension type will be used:

`--save, --sv <filename>` Stores the graphic window given a file name. The graphic output format is deduced from the extension of the file name. Supported formats are: emf, eps, jpeg, jpg, pdf, png [DEFAULT], ps, raw, rgba, svg, svgz.

Example:

```
graph.py -f /home/gLAB/Example -x 1 -y 2 --save Figure_Example
graph.py -f /home/gLAB/Example -x 1 -y 2 --sv /home/Desktop/Figure_Example.eps
```

STANFORD PLOT:

In this mode:

For GRAPHIC GENERAL OPTIONS, all the options work the same way as in the default plots,

except the options "`--Ftitle`" (add a fractional title), "`--xt`" and "`--yt`" (for setting ticks) which are disabled.

For PLOT DEPENDENT OPTIONS, the options "`-f`", "`-x`", "`-y`", "`-c`", "`-g`" work the same way as in the default plots,

while the other options in this part are disabled in this mode.

"`-x`" and "`-y`" options can also be written as "`--error`" and "`--pl`" respectively.

MULTIPLE PLOTS are disabled in this mode.

For SAVE CURRENT GRAPHIC, it works the same way as for the other kind of plots.

`--stanford, --sf, --sp` Make a stanford plot.

`--AL, --al #` Set the alarm limit for the protection level, if no value is provided, AL is set to 40 [DEFAULT].

`--clean` Make a stanford Plot without failure patches.

`--xr, --xresolution #` Set the resolution in x-direction of the plot. If no value is provided, it is set to 0.5 [DEFAULT].

`--yr, --yresolution #` Set the resolution in y-direction of the plot. If no value is provided, it is set to 0.5 [DEFAULT].

`--percentilex, --percentileX` Show ticks where the percentiles 68, 95 and 99.9 of the points are reached in the horizontal axis.

`--percentiley, --percentileY` Show ticks where the percentiles 68, 95 and 99.9 of the points are reached in the vertical axis.

`--percentilexlist, #,#,...` Show ticks where the user provided percentiles of the points are reached in the horizontal axis. The list of points must be a comma separated list. If this parameter is provided along with parameter '`--percentilex`', the latter will be ignored.

--percentilelist, #,#,... Show ticks where the user provided percentiles of
--percentileYList the points are reached in the vertical axis.
The list of points must be a comma separated list.
If this parameter is provided along with parameter
'--percentileY', the latter will be ignored.

Example:

```
graph.py -f /home/gLAB/Example -x 1 -y 2 --sf
```

STANFORD-ESA PLOT:

In this mode:

The input file should have this fixed format (this is gLAB's output format):

The first three lines have the header with this format (numerical values can vary according to the plot):

```
#XSTEP YSTEP XMAX YMAX  
0.100 0.100 50.0 50.0  
# XPOS YPOS NUM_HOR NUM_VER
```

Since the fourth row, each row should provide the values: positioning error, protection level, number of horizontal values (at the given coordinate), number of vertical values

For GRAPHIC GENERAL OPTIONS, all the options work the same way as in the default plots

except the option "--Ftitle" (add a fractional title), "--xt" and "--yt" (for setting ticks) which are disabled.

For PLOT DEPENDENT OPTIONS, the options "-f" works the same way as in the default plots,

while the other options in this part are disabled in this mode.

MULTIPLE PLOTS are disabled in this mode.

For SAVE CURRENT GRAPHIC, since it has two plots, then two save paths should be provided. If only one path is provided,

only the vertical plot will be saved.

--stanfordESA, --sfesa, --spesa Make a stanford-ESA plot.

Example:

```
graph.py -f /home/gLAB/Example --sfesa --sv /home/Desktop/Figure_Vertical.eps --sv  
/home/Desktop/Figure_Horizontal.eps
```

Example:

```
graph.py -f /home/gLAB/Example --sfesa
```

WORLD MAP / STATION NAME MAP / WORST INTEGRITY RATIO PLOTS:

In this mode: One, two or three plots can be generated depending on the input.

The input file should contain the following fields: station name, geodetic coordinates (in degrees) and the values to be plotted.

Parameter "-x": longitude (degrees)

Parameter "-y": latitude (degrees)

For GRAPHIC GENERAL OPTIONS, all the options work as in the default plots

except:

the setting of "--xmax", "--xmin", "--ymax", "--ymin" only works properly with the 'Equidistant Cylindrical Projection'.

the option "--Ftitle", add a fractional title, is disabled.

the options "--xt" and "--yt" (for setting ticks) which are disabled.

the option "--AdjustToMargin" will only take effect on station maps.

For PLOT DEPENDENT OPTIONS, the options "-f", "-x", "-y", "--ms" work as in the default plots, while the other options in this part are blocked in this mode.

For SAVE CURRENT GRAPHIC:

In the case of one plot, it works the same way as for default plots

In the case of two plots, two save paths should be provided. If only one path is provided, only the vertical map will be saved.

In the case of three plots, three save paths should be provided. If only one path is provided, only the vertical map will be saved. If only two path are provided, only the vertical and horizontal maps will be saved.

- map --Map Make a world map plot with the given values.
- wir, --WIR Make a worst integrity ratio plot. This is a world map, but sets a fixed scale (with a minimum of 0 and a maximum of 2 independently of user input), and a fixed set of colors for the colourbar.
- rv, --ratioV, --RV <val> Set the source of the vertical values or worst integrity ratio. Identical properties as x,y column in the default plots.
- rh, --ratioH, --RH <val> Set the source of the horizontal values or worst integrity ratio. Identical properties as x,y column in the default plots.
- miv, --MIV <val> Set the source of the vertical MIs. Identical properties as x,y column in the default plots.

- `--mih, --MIH <val>` Set the source of the horizontal MIs.
Identical properties as x,y column in the default plots.
- `--projection, --pj <projection>` Set the projection of the map.
'Equidistant Cylindrical Projection' is set as [DEFAULT]
User can set the value of projection as 'lcc' or 'lambert'
to switch to "Lambert Conformal Projection".
- `--cbarMin, --cbarmin, --cmin #` The minimum value for the colourbar, if no value is provided,
automatic limits are set.
- `--cbarMax, --cbarmax, --cmax #` The maximum value for the colourbar, if no value is
provided, automatic limits are set.
- `--cbarInterval, --cbarN, --cn #` The value of interval for colourbar's tick, if no value is
provided, 8 is set as [DEFAULT]
- `--continentColor, --cc <color>` The continent's colour, if no value is provided, 'yellow' is
set as [DEFAULT]
- `--lakeColor, --lc <color>` The lake's colour, if no value is provided, 'white' is
set as [DEFAULT]
- `--boundaryColor, --bc <color>` The continent's colour, if no value is provided, 'white' is
set as [DEFAULT]
- `--mapres, --MapResolution <val>` Sets the world map resolution. Valid values are 'c',
'l' [DEFAULT], 'i', 'h' or 'f' (ordered from lower to higher
resolution).
- `--sn, --staName, --SN <val>` Set the source for the station name. Setting this value will
make a new plot with the stations positions. The plot may have
the name or a marker (or both) in the station coordinates
- `--stanetwithnames, --staNetWithNames` Add the station name in the station map. This is the default
behaviour if this option ('--stanetwithnames') and marker option
('--stanetwithmarkers') are not set. Also, this option is
automatically set if options '--stanetdefaultnamesize',
'--stanetdefaultnamecolor', '--stanetdefaultnamealign', '--
stanetnamesize', '--stanetnamecolor' or
'--stanetnamealign' are provided.
- `--stanetdefaultnamesize, # --staNetDefaultNameSize` Change the default letter size for the station names
[DEFAULT 9]
- `--stanetdefaultnamecolor, <color> --staNetDefaultNameColor` Change the default letter colour for the station names
[DEFAULT blue]

- `--stanetdefaultnamealign,` `<val1> <val2>`
`--staNetDefaultNameAlign`
- Change the default letter alignment for the station names. There are two alignments, horizontal and vertical alignment. The two values must be provided, first the horizontal alignment and then the vertical alignment. The possible values for horizontal alignment are:
- 'left'
 - 'right'
 - 'center' [DEFAULT]
- The possible values for vertical alignment are:
- 'top' [DEFAULT]
 - 'bottom'
 - 'center'
 - 'baseline'
- `--stanetwithmarkers,` Add a marker for each station in the station map. The marker properties can be set with the following options: `--stanetdefaultmarkertype`, `--stanetdefaultmarkersize`, `--stanetdefaultmarkercolor` and `--stanetmarkersize` shown below. This option is automatically set if any of the marker properties option are set. If this option is set but no marker properties are set, the default values for the markers are to be a circular shape, with blue color and size 5
- `--staNetWithMarkers`
- `--stanetdefaultmarkertype,` `<val>` Change the default marker type [DEFAULT 'o']
`--staNetDefaultMarkerType`
- `--stanetdefaultmarkersize,` `<val>` Change the default marker size [DEFAULT '5']
`--staNetDefaultMarkerSize`
- `--stanetdefaultmarkercolor,` `<val>` Change the default marker color [DEFAULT 'blue']
`--staNetDefaultMarkerColor`
- `--stanet,``--staNetwork,` Set the source for the station network name. This option is for allowing to add labels in the plot with the station map, as gLAB will be able to read from this column to what network each station belongs to.
`--staNetwork`
- `--stanetautolabel,` Add an automatic label for each station network, which will be read from the column set in parameter `--stanet`
`--stanetAutoLabel`
- `--stanetlabelnumsta,` Add to the label of each station network the number of stations read. The number will added at the end of the label name, adding a space (' ') and the number of station between parenthesis. This options works even if user sets a custom label for any network.
`--staNetLabelNumSta`

- `--stanetdefaultlabel,` `<label>` Change the default label for the station network
`--staNetDefaultLabel` `[DEFAULT 'Other']`
- `--stanetlabel,` `<stanetname> <label>`
`--staNetworkLabel` Set the label for a station network. Two values must be provided:

the name read from the input data (in the column specified with Parameter '--stanet') and the label to be applied. To set a label to each station network that appears on the file, set this parameter as many times as necessary
- `--stanetmarkertype,` `<stanetname> <val>`
`--staNetworkMarkerType` Set the marker type for a station network. Two values must be provided: the name read from the input data (in the column specified with parameter '--stanet') and the marker type to be applied (see parameter '-s' for marker options).
In order to set a marker type to each station network that appears on the file, set this parameter as many times as necessary
- `--stanetmarkercolor,` `<stanetname> <val>`
`--staNetworkMarkerColor` Set the marker colour for a station network. Two values must be provided: the name read from the input data (in the column specified with parameter '--stanet') and the marker colour to be applied (see parameter '--cl' for colours). In order to set a marker colour to each station network that appears on the file, set this parameter as many times as necessary
- `--stanetmarkersize,` `<stanetname> #`
`--staNetworkMarkerSize` Set the marker size for a station network. Two values must be provided: the name read from the input data (in the column specified with parameter '--stanet') and the marker size to be applied. In order to set a marker size to each station network that appears on the file, set this parameter as many times as necessary
- `--stanetnamecolor,` `<stanetname> <val>`
`--staNetNameColor` Set the colour for the station name for a given network. All the station name from the same network will have the same letter colour. Two values must be provided: the name read from the input data (in the column specified with parameter '--stanet') and the letter colour to be applied.
In order to set a letter colour to each station network that appears on the file, set this parameter as many times as necessary

- `--stanetnamesize, <stanetname> #`
`--staNetNameSize` Set the letter size for the station name for a given network. All the station name from the same network will have the same letter size. Two values must be provided: the name read from the input data (in the column specified with parameter '`--stanet`') and the letter size to be applied. In order to set a letter size to each station network that appears on the file, set this parameter as many times as necessary
- `--stanetnamealign, <stanetname> <va1> <val2>`
`--staNetNameAlign` Set the letter alignment for the station name for a given network. All the station name from the same network will have the same alignment. Three values must be provided: the name read from the input data (in the column specified with parameter '`--stanet`') the horizontal and vertical alignment -in this order- (see parameter '`--stanetdefaultnamealign`'). In order to set a letter alignment to each station network that appears on the file, set this parameter as many times as necessary

NOTES on World Maps / Worst Integrity Ratio Maps:

If only one of the parameters '`--rh`' or '`--rv`' is given, only the horizontal or vertical plots will be shown.

If both parameters '`--rh`' or '`--rv`' are given, two plots will be shown.

If any of '`--mih`' or '`--miv`' parameters are given. a coloured ring around the coloured circles will appear on the corresponding plot.

If only '`--sn`' parameter is given, a single plot with the station map will be shown.

It is recommended to save station name maps in pdf format, as station names will be searchable inside the file.

Example:

Generate one plot: `graph.py -f /home/gLAB/Example --wir -x 5 -y 7 --rh 11`

Generate two plots: `graph.py -f /home/gLAB/Example --wir -x 5 -y 7 --rh 11 --rv 13 --mih 17 --grid off`

Generate three plots: `graph.py -f /home/gLAB/Example --wir -x 5 -y 7 --rh 11 --rv 13 --sn 3 --mih 17 --miv 19`

Example for saving the plots:

`graph.py -f /home/gLAB/Example --wir -x 5 -y 7 --rv 13 --miv 19 --rh 11 --mih 17 --xmin -30 --xmax 40 --ymin 25 --ymax 75 --sv /home/Desktop/Figure_V.eps --sv /home/Desktop/Figure_H.eps --sv /home/Desktop/Figure_Station_Map.pdf`

SBAS AVAILABILITY AND CONTINUITY PLOT:

In this mode:

The input file should have this fixed format (this is gLAB's output format):

The first three lines have the header with this format (numerical values can vary according to the plot):

The first three lines have the header with this format (numerical values can vary according to the plot):

For SBAS Availability map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK
25.00 70.00 -30.00 40.00 1.00 0.00 40.00 50.00 315 2016 86400 120
5.00
# LAT LON AVAIL% NUMAVAIL NUMEPOCHS
  
```

NOTE: Previous versions of gLAB (5.2.0 and below) only had 4 fields in the third header line of the availability

map (e.g. '# LAT LON AVAIL%'). This old file format is also accepted.

For SBAS Continuity Risk map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK WINDOW_SIZE
25.00 70.00 -30.00 40.00 1.00 0.00 40.00 50.00 315 2016 86400 120
5.00 15
# LAT LON CONT-RISK NUMRISK NUMEPOCHS
  
```

NOTE: Previous versions of gLAB (5.2.0 and below) only had 4 fields in the third header line of the continuity risk

map (e.g. '# LAT LON CONT-RISK'). This old file format is also accepted.

For SBAS Maritime Continuity Risk map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK WINDOW_SIZE
25.00 70.00 -30.00 40.00 1.00 0.00 100000 100000 315 2016 86400
120 5.00 900
# LAT LON CONT-RISK NUMDISCONT NUMEPOCHS
  
```

For SBAS Ionosphere Availability map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION DoY YEAR NUMEPOCHS
GEO-PRN
65.00 73.00 30.00 40.00 0.10 255 2016 288 120
# LAT LON AVAIL% NUMAVAIL NUMEPOCHS
  
```

NOTE: Previous versions of gLAB (5.2.0 and below) only had 4 fields in the third header line of the ionosphere

availability map (e.g. '# LAT LON AVAIL%'). This old file format is also accepted.

For SBAS HDOP map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK
25.00 70.00 -30.00 40.00 1.00 0.00 40.00 50.00 026 2018 86400 0
5.00
# LAT LON MEANHDOP TOTALHDOP NUMEPOCHS PERCENT95
  
```

For SBAS PDOP map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK
25.00 70.00 -30.00 40.00 1.00 0.00 40.00 50.00 026 2018 86400 0
5.00
# LAT LON MEANPDOP TOTALPDOP NUMEPOCHS PERCENT95
  
```

For SBAS GDOP map:

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK
25.00 70.00 -30.00 40.00 1.00 0.00 40.00 50.00 026 2018 86400 0
5.00
# LAT LON MEANGDOP TOTALGDOP NUMEPOCHS PERCENT95
  
```

For SBAS combined DOP map (file with HDOP, PDOP and GDOP):

```

#MINLAT MAXLAT MINLON MAXLON RESOLUTION REC-HEIGHT HAL VAL DoY
YEAR NUMEPOCHS GEO-PRN ELEV-MASK
25.00 70.00 -30.00 40.00 1.00 0.00 40.00 50.00 026 2018 86400 0
5.00
# LAT LON MEANHDOP TOTALHDOP PERCENT95 MEANPDOP
TOTALPDOP PERCENT95 MEANGDOP TOTALGDOP PERCENT95
NUMEPOCHS
  
```

Graph program will automatically detect which type of input file is given using the header, and will read the map size from the header.

Since the fourth row, each row should provide the following values: latitude, longitude, value

For GRAPHIC GENERAL OPTIONS, only the option to set the title "--title" is enabled. If non set,

a title will be set automatically. The plot region will be automatically set from the header values.

For PLOT DEPENDENT OPTIONS, the options "-f" works the same way as in the default plots,

while the other options in this part are disabled in this mode.

MULTIPLE PLOTS are disabled in this mode.

For SAVE CURRENT GRAPHIC, it works the same way as for the default plots.

--sbas, --SBAS		Make a SBAS map
--bineqcond, --binequalcondition, --BinEqualCondition		When assigning values to the bins, the condition thresholds will be 'equal or greater than' (for availability and ionosphere plots) and 'equal or less than' (for continuity and DOP plots) instead of 'greater than' or 'less than'
--disablebineqcond, --DisableBinEqCond, --disablebinequalcondition --DisableBinEqualCondition		Option '--bineqcond' is by default disabled, but the '--sbasserviceformat', '--sbasservicemaritimeformat', '--sbasservicebinaryformat' or '--sbasservicemaritimebinaryformat' will enable '--bineqcond' option. With this option you can force the program to keep it disabled.
--disablenotavailbin, --DisableNotAvailBin		Disable the bin at the bottom of the colourbar with the text "NA" (Not Available) The values in this bin were set according to this criteria: <ul style="list-style-type: none">- In availability and ionosphere availability maps, all values larger than 100 or with the number of epochs equal to 0- In continuity and continuity risk maps, all values larger than 1 or with the number of epochs equal to 0- In DOP maps, all values with the number of epochs equal to 0
--notavailbincolor, --NotAvailBinColor	<color>	Set the colour for the "NA" (Not Available) bin. The colour must be using the rgb code with a hash ('#') at the beginning or with one values shown in the '--color' option.
--notavailbintext, --NotAvailBinText	<text>	Set the text for the "NA" (Not Available) bin to be shown in the colourbar.
--contriskaspercentage, --ContRiskAsPercentage		In continuity risk and maritime continuity risk plots, continuity percentage instead of the continuity risk. That is the bin values shown will computed as: $100 \cdot (1 - \text{binvalue})$, converting also the symbols "<" and ">=" respectively.
--availmapbins, --AvailMapBins		Set a custom list of bins for the availability plot. The list must be comma separated. The program will automatically add a bin in the beginning as all values smaller or equal than the smallest bin value provided. Values may be provided in any order, as they will be automatically sorted. DEFAULT: 20.0,50.0,75.0,90.0,95.0,97.5,99.0,99.5,99.9
--contriskmapbins, --ContRiskMapBins	#,#,...	Set a custom list of bins for the continuity risk plot. The list must be comma separated. The program will automatically add a bin in the beginning as all values equal or greater than the greater bin value provided. Values may be provided in any order, as they will be automatically sorted. DEFAULT: 1e-2,7.5e-3,5e-3,2.5e-3,1e-3,7.5e-4,5e-4,2.5e-4,1e-4,1e-5

- contriskmarmapbins, #,#,... Set a custom list of bins for the maritime continuity risk plot.
--ContRiskMarMapBins The list must be comma separated. The program will automatically add two bins: one for all values greater than one ('1') and a bin with all values equal or greater than the greater bin value provided but smaller than 1. Values may be provided in any order, as they will be automatically sorted.
DEFAULT: 1e-2,7.5e-3,5e-3,2.5e-3,1e-3,7.5e-4,5e-4,2.5e-4,1e-4,1e-5
- ionoavailmapbins, #,#,... Set a custom list of bins for the ionosphere availability plot. The list must be comma separated. The program will automatically add a bin in the beginning as all values smaller or equal than the smallest bin value provided. Values may be provided in any order, as they will be automatically sorted.
--IonoAvailMapBins DEFAULT: 20.0,50.0,75.0,90.0,95.0,97.5,99.0,99.5,99.9
- hdopmapbins, #,#,... Set a custom list of bins for the Horizontal DOP (HDOP) plot. The list must be comma separated. The program will automatically add a bin in the beginning as all values greater or equal than the greater bin value provided. Values may be provided in any order, as they will be automatically sorted.
--HDOPMapBins DEFAULT: 4,2
- pdopmapbins, #,#,... Set a custom list of bins for the Position DOP (PDOP) plot. The list must be comma separated. The program will automatically add a bin in the beginning as all values greater or equal than the greater bin value provided. Values may be provided in any order, as they will be automatically sorted.
--PDOPMapBins DEFAULT: 6,3.5
- gdopmapbins, #,#,... Set a custom list of bins for the Geometric DOP (GDOP) plot. The list must be comma separated. The program will automatically add a bin in the beginning as all values greater or equal than the greater bin value provided. Values may be provided in any order, as they will be automatically sorted.
--GDOPMapBins DEFAULT: 7,5
- availmapbinstext, <text1>;<text2>;...
--AvailMapBinsText Set a custom list with the text to be shown in the bins of the colourbar for the availability plot. The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--availmapbins'. The additional bin is to account for the bin that gLAB adds for all values smaller than the minimum bin provided.
- contriskmapbinstext, <text1>;<text2>;...
--ContRiskMapBinsText Set a custom list with the text to be shown in the bins of the colourbar for the continuity risk plot.

The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--contriskmapbins'. The additional bin is to account for the bin that gLAB adds for all values greater than the maximum bin provided.

--contriskmarmapbinstext, <text1>;<text2>;...

--ContRiskMarMapBinsText Set a custom list with the text to be shown in the bins of the colourbar for the maritime continuity risk plot. The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--contriskmarmapbins'. The additional bin is to account for the bin that gLAB adds for all values greater than the maximum bin provided.

--ionoavailmapbinstext, <text1>;<text2>;...

--IonoAvailMapBinsText Set a custom list with the text to be shown in the bins of the colourbar for the ionosphere availability plot. The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--ionoavailmapbins'. The additional bin is to account for the bin that gLAB adds for all values smaller than the minimum bin provided.

--hdopmapbinstext, <text1>;<text2>;...

--HDOPMapBinsText Set a custom list with the text to be shown in the bins of the colourbar for Horizontal DOP (HDOP) plot. The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--hdopmapbins'. The additional bin is to account for the bin that gLAB adds for all values greater than the maximum bin provided.

--pdopmapbinstext, <text1>;<text2>;...

--PDOPMapBinsText Set a custom list with the text to be shown in the bins of the Colourbar for the Position DOP (PDOP) plot. The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--pdopmapbins'. The additional bin is to account for the bin that gLAB adds for all values greater than the maximum bin provided.

- gdopmapbinstext, <text1>;<text2>;...
--GDOPMapBinsText Set a custom list with the text to be shown in the bins of the colourbar for the Geometric DOP (GDOP) plot. The list must be semicolon (;) separated, with the same number of items plus one as in the default colourbar or the same number plus one as set with parameter '--gdopmapbins'. The additional bin is to account for the bin that gLAB adds for all values greater than the maximum bin provided.
- availcontourlevels, #,#,... Set the levels list for drawing the availability map contour lines. The list must be comma separated, and the values provided must be in the list of bins provided with '--availmapbins' parameter (or the default bins if not provided). Values may be provided in any order, as they will be automatically sorted. DEFAULT: 95.0,97.5,99.9
--AvailContourLevels
- contriskcontourlevels, #,#,... Set the levels list for drawing the continuity risk map contour lines. The list must be comma separated, and the values provided must be in the list of bins provided with '--contriskmapbins' parameter (or the default bins if not provided). Values may be provided in any order, as they will be automatically sorted. DEFAULT: 1e-3,5e-4
--ContRiskContourLevels
- contriskmarcontourlevels, #,#,... Set the levels list for drawing the continuity maritime risk map contour lines. The list must be comma separated, and the values provided must be in the list of bins provided with '--contriskmarmapbins' parameter (or the default bins if not provided). Values may be provided in any order, as they will be automatically sorted. DEFAULT: 1e-3,5e-4
--ContRiskMarContourLevels
- availbincolors, #,#,... Set the colours to be used in the colour bar in a comma separated list for each bin in the availability map. The number of colours must be the number of bins plus 1 provided in the '--availmapbins' parameter (by default 10 colours). The extra colour is due to gLAB adds an extra bin for all values smaller than the minimum bin provided. The list of colours MUST be ordered, starting with the colour of the smallest bin and ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning.
--AvailBinColors
- contriskbincolors, #,#,... Set the colours to be used in the colour bar in a comma separated list for each bin in the continuity risk map. The number of colors must be the number of bins plus 1 provided in the '--contriskmapbins' parameter (by default 10 colors). The extra color is due to gLAB adds an extra bin for all values smaller than the minimum bin provided. The list of colors MUST be ordered, starting with the color of the smallest bin and

ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning.

- `--contriskmarbincolors, #,#,...` Set the colours to be used in the colour bar in a comma separated list for each bin in the maritime continuity risk map. The number of colours must be the number of bins plus 2 provided in the '`--contriskmarmapbins`' parameter (by default 11 colours). gLAB adds an extra bin for all values smaller than the minimum bin provided plus another bin with all values greater than 1. The list of colours MUST be ordered, starting with the colour of the smallest bin and ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning. For example, the default colours used for the maritime continuity risk map are:
"#000000,#000080,#0000F3,#004DFF,#00B3FF,#29FFCE,#7BFF7B,#CEFF29,#FFC600,#FF6800,#F30900"
- `--ionoavailbincolors, #,#,...` Set the colours to be used in the colour bar in a comma separated list for each bin in the ionosphere availability map. The number of colours must be the number of bins plus 1 provided in the '`--ionoavailmapbins`' parameter (by default 10 colours). The extra colour is due to gLAB adds an extra bin for all values smaller than the minimum bin provided. The list of colours MUST be ordered, starting with the colour of the smallest bin and ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning.
- `--hdopbincolors, #,#,...` Set the colours to be used in the colour bar in a comma separated list for each bin in the HDOP map. The number of colours must be the number of bins plus 1 provided in the '`--hdopmapbins`' parameter (by default 10 colours). The extra colour is due to gLAB adds an extra bin for all values smaller than the minimum bin provided. The list of colours MUST be ordered, starting with the color of the smallest bin and ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning.
- `--pdopbincolors, #,#,...` Set the colours to be used in the colour bar in a comma separated list for each bin in the PDOP map. The number of colours must be the number of bins plus 1 provided in the '`--pdopmapbins`' parameter (by default 10 colours). The extra colour is due to gLAB adds an extra bin for all values smaller than the minimum bin provided. The list of colours MUST be ordered, starting with the colour of the smallest bin and ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning.

--gdopbincolors, #,#,...
--GDOPBinColors

Set the colours to be used in the colour bar in a comma separated list for each bin in the GDOP map. The number of colors must be the number of bins plus 1 provided in the '--gdopmapbins' parameter (by default 10 colours). The extra colour is due to gLAB adds an extra bin for all values smaller than the minimum bin provided. The list of colours MUST be ordered, starting with the colour of the smallest bin and ending with the colour of the highest bin. The colour must be set using the rgb code with a hash ('#') at the beginning.

--sbasserviceformat,
--SBASServiceFormat

Set the SBAS maps to an alternative format. In this format, contour lines are disabled by default, but can be enabled by manually setting the contour levels with any of these parameters: '--availcontourlevels', '--contriskcontourlevels' or '--contriskmarcontourlevels'.

Availability Maps:

Bin values: $\geq 99.9, \geq 99, \geq 98, \geq 95, \geq 90, \geq 80, \geq 70, < 70$

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

Continuity Risk Maps:

Bin values:

$\leq 1e-4, \leq 5e-4, \leq 1e-3, \leq 5e-3, \leq 1e-2, \leq 2e-2, \leq 3e-2, > 3e-2$

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

Maritime Continuity Risk Maps:

Bin values:

$\leq 1e-4, \leq 5e-4, \leq 1e-3, \leq 5e-3, \leq 1e-2, \leq 2e-2, \leq 3e-2, > 3e-2$

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

Ionosphere Availability Maps:

Bin values: $\geq 99.9, \geq 99, \geq 98, \geq 95, \geq 90, \geq 80, \geq 70, < 70$

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

HDOP Maps:

Bin values: $< 2, < 4, \geq 4$ (same as the default ones)

Bin colours: #00008b,#ffa500,#8b0000

Not Avail bin is enabled and with default colour

PDOP Maps:

Bin values: $< 3.5, < 6, \geq 6$ (same as the default ones)

Bin colours: #00008b,#ffa500,#8b0000

Not Avail bin is enabled and with default colour

GDOP Maps:

Bin values: <5,<7,>=7 (same as the default ones)
Bin colours: #00008b,#ffa500,#8b0000
Not Avail bin is enabled and with default colour

NOTES:

- If user manually sets the bin values or bin colours, the user options will prevail
- The user change the bin thresholds from ">=" or "<=" to ">" or "<" respectively by setting the option '--disablebineqcond'

--sbasserviceformat,
--SBASServiceMaritimeFormat

Set the SBAS maps to an alternative format. In this format, contour lines are disabled by default, but can be enabled by manually setting the contour levels with any of these parameters: '--availcontourlevels', '--contriskcontourlevels' or '--contriskmarcontourlevels'.

Availability Maps:

Bin values: >=99.8,>=99.5,>=99,>=97.5,>=95,>=90,>=70,<70

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

Continuity Risk Maps:

Bin values:

<=3e-4,<=4e-4,<=5e-4,<=7e-4,<=1e-3,<=1e-2,>1e-1

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

Maritime Continuity Risk Maps:

Bin values:

<=3e-4,<=4e-4,<=5e-4,<=7e-4,<=1e-3,<=1e-2,>1e-1

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

Ionosphere Availability Maps:

Bin values:

>=99.8,>=99.5,>=99,>=97.5,>=95,>=90,>=70,<70

Bin colours:

#00008b,#0040ff,#00ffff,#00ff00,#ffff00,#ffa500,#ff0000,#8b0000

Not Avail bin is enabled and with default colour

HDOP Maps:

Bin values: <2,<4,>=4 (same as the default ones)

Bin colours: #00008b,#ffa500,#8b0000

Not Avail bin is enabled and with default colour

PDOP Maps:

Bin values: <3.5,<6,>=6 (same as the default ones)

Bin colours: #00008b,#ffa500,#8b0000
Not Avail bin is enabled and with default colour
GDOP Maps:
Bin values: <5,<7,>=7 (same as the default ones)
Bin colours: #00008b,#ffa500,#8b0000
Not Avail bin is enabled and with default colour

NOTES:

- If user manually sets the bin values or bin colours, the user options will prevail
- The user change the bin thresholds from ">=" or "<=" to ">" or "<" respectively by setting the option '--disablebineqcond'

--sbasservicebinaryformat,
--SBASServiceBinaryFormat

Set the SBAS maps to an alternative format that only has two bins (plus the 'Not Avail' bin). The bin texts are 'Not \n Compliant' and 'Compliant' This format is useful for visually checking if a condition is met or not (e.g. availability >=99.8). The user may change the bin value to set the desired condition. Also, contour lines are disabled by default, but can be enabled by manually setting the contour levels with any of these parameters: '--availcontourlevels', '--contriskcontourlevels' or '--contriskmarcontourlevels'.
The default values for this format are:

Availability Maps:

Bin values: >=99.9,<99.9
Bin colours: #ffffff,#006400
Colourbar title: " >=99.9%" (the spaces are for padding the text to the right)

Continuity Risk Maps:

Bin values: <=1e-4,>1e-4
Bin colours: #ffffff,#006400
Colourbar title: " <=1e-4" (the spaces are for padding the text to the right)

Maritime Continuity Risk Maps:

Bin values: <=1e-4,>1e-4
Bin colours: #ffffff,#006400
Colourbar title: " <=1e-4" (the spaces are for padding the text to the right)

Ionosphere Availability Maps:

Bin values: >=99.9,<99.9
Bin colours: #ffffff,#006400
Colourbar title: " >=99.9%" (the spaces are for padding the text to the right)

HDOP Maps:

Bin values: <4,>=4

Bin colours: #ffffff,#006400

Colourbar title: " <4" (the spaces are for padding the text to the right)

PDOP Maps:

Bin values: <6,>=6

Bin colours: #ffffff,#006400

Colourbar title: " <6" (the spaces are for padding the text to the right)

GDOP Maps:

Bin values: <7,>=7

Bin colours: #ffffff,#006400

Colourbar title: " <7" (the spaces are for padding the text to the right)

NOTES:

- If user manually sets the bin values, bin colours or bin texts, the user options will prevail
- If user changes the bin value, the colourbar title will show the user defined bin value
- The user change the bin thresholds from ">=" or "<=" to ">" or "<" respectively by setting the option '--disablebineqcond'

--sbasservicemaritimebinaryformat,

--SBASServiceMaritimeBinaryFormat

Set the SBAS maps to an alternative format that only has two bins (plus the 'Not Avail' bin). The bin texts are 'Not \n Compliant' and 'Compliant' This format is useful for visually checking if a condition is met or not (e.g. availability >=99.8). The user may change the bin value to set the desired condition. Also, contour lines are disabled by default, but can be enabled by manually setting the contour levels with any of these parameters: '--availcontourlevels', '--contriskcontourlevels' or '--contriskmarcontourlevels'. The default values for this format are:

Availability Maps:

Bin values: >=99.8,<99.8

Bin colours: #ffffff,#006400

Colourbar title: " >=99.8%" (the spaces are for padding the text to the right)

Continuity Risk Maps:

Bin values: <=3e-4,>3e-4

Bin colours: #ffffff,#006400

Colourbar title: " <=3e-4" (the spaces are for padding the text to the right)

Maritime Continuity Risk Maps:

Bin values: $\leq 3e-4, > 3e-4$

Bin colours: #ffffff,#006400

Colourbar title: " $\leq 3e-4$ " (the spaces are for padding the text to the right)

Ionosphere Availability Maps:

Bin values: $\geq 99.8, < 99.8$

Bin colours: #ffffff,#006400

Colourbar title: " $\geq 99.8\%$ " (the spaces are for padding the text to the right)

HDOP Maps:

Bin values: $< 4, \geq 4$

Bin colours: #ffffff,#006400

Colourbar title: " < 4 " (the spaces are for padding the text to the right)

PDOP Maps:

Bin values: $< 6, \geq 6$

Bin colours: #ffffff,#006400

Colourbar title: " < 6 " (the spaces are for padding the text to the right)

GDOP Maps:

Bin values: $< 7, \geq 7$

Bin colours: #ffffff,#006400

Colourbar title: " < 7 " (the spaces are for padding the text to the right)

NOTES:

- If user manually sets the bin values, bin colours or bin texts, the user options will prevail
- If user changes the bin value, the colourbar title will show the user defined bin value
- The user change the bin thresholds from " \geq " or " \leq " to " $>$ " or " $<$ " respectively bysetting the option '--disablebineqcond'

--availcbartitle, --AvailCbarTitle	<text>	Set the title for the colourbar in the availability maps
--contriskcbartitle, --ContRiskCbarTitle	<text>	Set the title for the colourbar in the continuity risk maps
--contriskmarcbartitle, --ContRiskMarCbarTitle	<text>	Set the title for the colourbar in the maritime continuity risk maps
--ionoavailcbartitle, --IonoAvailCbarTitle	<text>	Set the title for the colourbar in the ionosphere availability maps
--hdopcbartitle, --HDOPCbarTitle	<text>	Set the title for the colourbar in the Horizontal DOP (HDOP) maps

- pdopcbartitle, <text> Set the title for the colourbar in the Position DOP
--PDOPCbarTitle (PDOP) maps
- gdopcbartitle, <text> Set the title for the colourbar in the Geometric DOP
--GDOPCbarTitle (GDOP) maps
- nocontourlines, Do not show contour lines in Availability and
--NoContourLines, Continuity Risk maps
--nocontourlevels,
--NoContourLevels
- nocbarpercent, Do not put the '%' sign in top of the colourbar
- NoCbarPercent
--doppercentileplot, In DOP maps, also do percentile DOP plots
--DOPPercentilePlot
- CbarLabel, --cbarlabel <text> Add a label next to the colourbar
- SBASSystemname, <text> Set the name of the SBAS system in the title,
--sbassystemname replacing the default "SBAS" text in the default title.
- PRNtext, --prntext <text> Replace the "PRN <number>" text in the default title with the
given text. This is useful when the plot is from multiple PRNs,
where the default PRN is 0.
- PRNtextnewline, --prntextnewline Move the "PRN <number>" to a newline below (instead
of being next to the alarm limits and the pixel resolution)
- firuser, --FIRUser <filename>
Add a user defined FIR area through a text file. The text file must
Contain no header and each line at least two columns (separated
by any number of spaces): one with the longitude and another with
the latitude (in degrees, in ellipsoidal coordinates). Additional
columns will be ignored. Also, lines starting with a hash ('#') will be
ignored.
In order to be able to compute the degradation percentage inside
the area, the FIR area must be closed by repeating the initial point
at the end of the file.
For setting multiple FIR areas, set this parameter as many times as
necessary

--fireu, --FIREu, --FIREU

Add the external borders of the European FIR (Flight Information Region) area in the map (the European FIR coordinates are hardcoded in the program)

--firconus, --FIRCONUS

Add the external borders of the CONUS FIR (Flight Information Region) area in the map (the CONUS FIR coordinates are hardcoded in the program)

--firalaska, --FIRAlaska

Add the external borders of the Alaska FIR (Flight Information Region) area in the map (the Alaska FIR coordinates are hardcoded in the program)

--fircanada, --FIRCanada

Add the external borders of the Canada FIR (Flight Information Region) area in the map (the Canada FIR coordinates are hardcoded in the program)

--firmexico, --FIRMexico

Add the external borders of the Mexico FIR (Flight Information Region) area in the map (the Mexico FIR coordinates are hardcoded in the program)

--firlinetype,
--FIRLineType

<val>

Set the linewidth for FIR area border (see option '-s')
[DEFAULT '--']

Set this option for each user defined FIR area drawn (option '--firuser'). If only one FIR area is drawn (including the European FIR area), this option will be set for that area (so it keeps compatibility with previous versions).

--firlinetypeeu,
--FIRLineTypeEu

<val>

Same as '--firlinetype', but only applies to the European FIR area defined in option '--fireu'.

--firlinetypeconus,
--FIRLineTypeCONUS

<val>

Same as '--firlinetype', but only applies to the CONUS FIR area defined in option '--firconus'.

--firlinetypealaska,
--FIRLineTypeAlaska

<val>

Same as '--firlinetype', but only applies to the Alaska FIR area defined in option '--firalaska'.

--firlinetypecanada,
--FIRLineTypeCanada

<val>

Same as '--firlinetype', but only applies to the Canada FIR area defined in option '--fircanada'.

--firlinetypemexico,
--FIRLineTypeMexico

<val>

Same as '--firlinetype', but only applies to the Mexico FIR area defined in option '--firmexico'.

<p>--firlinewidth, # --FIRLineWidth</p>	<p>#</p>	<p>Set the linewidth for FIR area border [DEFAULT 2] Set this option for each user defined FIR area drawn (option '--firuser'). If only one FIR area is drawn (including the European FIR area), this option will be set for that area (so it keeps compatibility with previous versions).</p>
<p>--firlinewidtheu, --FIRLineWidthEu</p>	<p>#</p>	<p>Same as '--firlinewidth', but only applies to the European FIR area defined in option '--fireu'.</p>
<p>--firlinewidthconus, --FIRLineWidthCONUS</p>	<p>#</p>	<p>Same as '--firlinewidth', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firlinewidthalaska, --FIRLineWidthAlaska</p>	<p>#</p>	<p>Same as '--firlinewidth', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--firlinewidthcanada, --FIRLineWidthCanada</p>	<p>#</p>	<p>Same as '--firlinewidth', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firlinewidthmexico, --FIRLineWidthMexico</p>	<p>#</p>	<p>Same as '--firlinewidth', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firlinecolor, --FIRLineColor</p>	<p><color></p>	<p>Set the colour for the FIR area border [DEFAULT 'white' for availability maps, 'black' for world maps] Set this option for each user defined FIR area drawn (option '--firuser'). If only one FIR area is drawn (including the European FIR area), this option will be set for that area (so it keeps compatibility with previous versions).</p>
<p>--firlinecoloreu, --FIRLineColorEu</p>	<p><color></p>	<p>Same as '--firlinecolor', but only applies to the European FIR area defined in option '--fireu'.</p>
<p>--firlinecolorconus, --FIRLineColorCONUS</p>	<p><color></p>	<p>Same as '--firlinecolor', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firlinecoloralaska, FIRLineColorAlaska</p>	<p><color></p>	<p>Same as '--firlinecolor', but only applies to the Alaska -- FIR area defined in option '--firalaska'.</p>
<p>--firlinecolorcanada, --FIRLineColorCanada</p>	<p><color></p>	<p>Same as '--firlinecolor', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firlinecolormexico, --FIRLineColorMexico</p>	<p><color></p>	<p>Same as '--firlinecolor', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firmarkersize, --FIRMarkerSize</p>	<p>#</p>	<p>Set the marker size for FIR area border [DEFAULT 5] Set this option for each user defined FIR area drawn (option '--firuser'). If only one FIR area is drawn (including the European FIR area), this Option will be set for that area (so it keeps compatibility with previous versions).</p>

<p>--firmarkersizeeu, --FIRMarkerSizeEu</p>	<p>#</p>	<p>Same as '--firmarkersize', but only applies to the European FIR area defined in option '--fireu'.</p>
<p>--firmarkersizeconus, --FIRMarkerSizeCONUS</p>	<p>#</p>	<p>Same as '--firmarkersize', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firmarkersizealaska, --FIRMarkerSizeAlaska</p>	<p>#</p>	<p>Same as '--firmarkersize', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--firmarkersizecanada, --FIRMarkerSizeCanada</p>	<p>#</p>	<p>Same as '--firmarkersize', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firmarkersizemexico, --FIRMarkerSizeMexico</p>	<p>#</p>	<p>Same as '--firmarkersize', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--nofirborder, --NoFIRBorder</p>	<p>#</p>	<p>Do not show the user defined FIR in the map. This option is useful if the user is only interested in computing the degradation percentage inside the FIR area (and printing it in the plot), but not the FIR area border itself. The parameter must come with the number of the user defined FIR that shall not be plotted. For instance, if user define two FIR areas, and the second FIR area does not have to be plotted, then the parameter should be '--nofirborder 2'. This parameter must be provided for each user defined FIR area that shall not be plotted.</p> <p>NOTE: If the number provided is 0, all user defined FIR areas will not be plotted</p>
<p>--nofirbordereu, --NoFIRBorderEu</p>		<p>Same as '--nofirborder', but only applies to the European FIR area defined in option '--fireu'.</p>
<p>--nofirborderconus, --NoFIRBorderCONUS</p>		<p>Same as '--nofirborder', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--nofirborderalaska, --NoFIRBorderAlaska</p>		<p>Same as '--nofirborder', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--nofirbordercanada, --NoFIRBorderCanada</p>		<p>Same as '--nofirborder', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--nofirbordermexico, --NoFIRBorderMexico</p>		<p>Same as '--nofirborder', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firdegradation, --FIRDegradation</p>		<p>Compute the availability degradation inside the FIR area and plot it in the map (for availability and continuity maps only)</p>

<code>--firdegtextheader,</code> <code>--FIRDegTextHeader</code>	<code><text></code>	Set the header for the FIR availability degradation. This text will be printed once for each availability area defined by the user, on top of the degradation text. Set this option for each user defined FIR area (option '--firuser'). If option '--firdegtexttable' is set, it will change the header title for this FIR
<code>--firdegtextheadereu,</code> <code>--FIRDegTextHeaderEu</code>	<code><text></code>	Set the header for the European FIR availability degradation. This text will be printed on top of the If option '--firdegtexttable' is set, it will change the header title for this FIR European area degradation text.
<code>--firdegtextheaderconus,</code> <code>--FIRDegTextHeaderCONUS</code>	<code><text></code>	Set the header for the CONUS FIR availability degradation. This text will be printed on top of the CONUS area degradation text. If option '--firdegtexttable' is set, it will change the header title for this FIR
<code>--firdegtextheaderalaska,</code> <code>--FIRDegTextHeaderAlaska</code>	<code><text></code>	Set the header for the Alaska FIR availability degradation. This text will be printed on top of the Alaska area degradation text. If option '--firdegtexttable' is set, it will change the header title for this FIR
<code>--firdegtextheadercanada,</code> <code>--FIRDegTextHeaderCanada</code>	<code><text></code>	Set the header for the Canada FIR availability degradation. This text will be printed on top of the Canada area degradation text. If option '--firdegtexttable' is set, it will change the header title for this FIR
<code>--firdegtextheadermexico,</code> <code>--FIRDegTextHeaderMexico</code>	<code><text></code>	Set the header for the Mexico FIR availability degradation. This text will be printed on top of the Mexico area degradation text. If option '--firdegtexttable' is set, it will change the header title for this FIR
<code>--firdegtextheaderfirsum,</code> <code>--FIRDegTextHeaderFIRSum</code>	<code><text></code>	Set the header for all FIR availability degradation. This text will be printed on top of all FIR area degradation text. This option also sets '--firsumdeg'. If option '--firdegtexttable' is set, it will change the header title for this FIR
<code>--firdegtextfooter,</code> <code>--FIRDegTextFooter</code>	<code><text></code>	Set the footer for the FIR availability degradation. This text will be printed once for each availability area

defined by the user, below the last degradation text. Set this option for each user defined FIR area drawn (option '--firuser').

<pre>--firdegtextfootereu, <text> --FIRDegTextFooterEu</pre>	<p>Set the footer for the European FIR availability degradation. This text will be printed below the European area degradation text.</p>
<pre>--firdegtextfooterconus, <text> --FIRDegTextFooterCONUS</pre>	<p>Set the footer for the CONUS FIR availability degradation. This text will be printed below the CONUS area degradation text.</p>
<pre>--firdegtextfooteralaska, <text> --FIRDegTextFooterAlaska</pre>	<p>Set the footer for the Alaska FIR availability degradation. This text will be printed below the Alaska area degradation text.</p>
<pre>--firdegtextfootercanada, <text> --FIRDegTextFooterCanada</pre>	<p>Set the footer for the Canada FIR availability degradation. This text will be printed below the Canada area degradation text.</p>
<pre>--firdegtextfootermexico, <text> --FIRDegTextFooterMexico</pre>	<p>Set the footer for the Mexico FIR availability degradation. This text will be printed below the Mexico area degradation text.</p>
<pre>--firdegtextfooterfirsum, <text> --FIRDegTextFooterFIRSum</pre>	<p>Set the footer for all FIR availability degradation. This text will be printed below the all FIR area degradation text. This option also sets '--firsumdeg'.</p>
<pre>--firdegtext, <text> --FIRDegText</pre>	<p>Set the text for the FIR availability degradation (only if option '--firdegtexttable' is not set). This text will be printed for each bin defined with parameter '--firdegtextbins', or if none defined, using the bin at the top of the colourbar. The default text is: '>{2:.1f}: {0:.2f}% <={2:.1f}: {1:.2f}%.' Note that '{0:.2f}' sets to write the availability percentage value with two decimals, '{1:.2f}' sets to write the unavailability percentage with two decimals and '{2:.1f}' sets to write the current bin value with one decimal. If any of these are not set, the value missing will not be printed. For example, to print only the availability percentage with one decimal and no other text but a percentage, the string would be: '{0:.1f}%' For example, to print the unavailability percentage with one decimal to get text such as "<99.9: 1.2%", the string would be: '<{2:.1f}: {1:.1f}%' NOTES: - To print a literal curly-brace ('{' or '}'), set double number of curly braces. For example, if the desired text is 'Avail {80%}', the string to be</p>

passed by parameter shall be 'Avail {{{0:.0f}%}}'.

- The total number of points inside the FIR area, the number of points Over the bin value and below the bin value (inside the FIR area) can be also printed (the values used to compute the percentages). Use the following formats:
 - {0:.1f} -> Percentage of points over the bin value inside the FIR area
 - {1:.1f} -> Percentage of points below the bin value inside the FIR area
 - {2:.1f} -> Value of the current bin (for continuity risk bins, use the exponential format, for instance: {2:.1e})
 - {3:d} -> Number of points over the bin value inside the FIR area
 - {4:d} -> Number of points below the bin value inside the FIR area
 - {5:d} -> Total number of points inside the FIR area
 - {6:d} -> Total number of points in the whole plot

--firdegtexteu, --FIRDegTextEu	<text>	Same as '--firdegtext', but only applies to the European FIR area defined in option '--fireu'.
--firdegtextconus, --FIRDegTextCONUS	<text>	Same as '--firdegtext', but only applies to the CONUS FIR area defined in option '--firconus'.
--firdegtextalaska, --FIRDegTextAlaska	<text>	Same as '--firdegtext', but only applies to the Alaska FIR area defined in option '--firalaska'.
--firdegtextcanada, --FIRDegTextCanada	<text>	Same as '--firdegtext', but only applies to the Canada FIR area defined in option '--fircanada'.
--firdegtextmexico, --FIRDegTextMexico	<text>	Same as '--firdegtext', but only applies to the Mexico FIR area defined in option '--firmexico'.
--firdegtextfirsum, --FIRDegTextFIRSum	<text>	Same as '--firdegtext', but applies to the degradation which is the total sum of all FIR areas defined and set to be added. When setting this option (computing the total degradation of all FIR areas), the bins used in each FIR area must be the same for all of them. This option also sets '--firsumdeg'.
--firsumdeg, --FIRSumDeg		Compute the total degradation for all FIR areas defined and print the result. If any of the options '--firdegtextfirsum', '--firdegtextsizefirsum', '--firdegtextcolorfirsum' or '--firdegtextpositionfirsum' are set, default values will be set.

NOTES:

- If none of these options '--firsumdegeu', '--firsumdegconus', '--firsumdegAlaska', '--firsumdegcanada', '--firsumdegmexico', '--firsumdeguserfir' are provided, it will select all FIR areas enabled.
 Otherwise, if any of these options are provided, only the

selected FIR areas will be used

- If several FIR areas overlap, each overlapped point will count only once, and the value used will be the best of all FIRs (as it is enough for any area in the map to be covered by one system or GEO).
- If this option is set and the degradation text is not printed in a table, all degradation bins must have the same values.
- If option '--firsumdegtxttitle' is not set. the default title is "All FIRs".

--firsumdegeu, --FIRSumDegEu		Select Eu FIR area to be added to the total degradation sum.
--firsumdegconus, --FIRSumDegCONUS		Select CONUS FIR area to be added to the total degradation sum.
--firsumdegalaska, --FIRSumDegAlaska		Select Alaska FIR area to be added to the total degradation sum.
--firsumdegcanada, --FIRSumDegCanada		Select Canada FIR area to be added to the total degradation sum.
--firsumdegmexico, --FIRSumDegMexico		Select Mexico FIR area to be added to the total degradation sum.
--firsumdeguserfir, --FIRSumDegUserFIR	##,...	Select user defined FIR areas (defined with parameter '--firuser') to be added to the total degradation sum (in a comma separated list). If value is 0, it will select all user defined FIR areas.
--firdegtextbins, --FIRDegTextBins	##,...	Set the bins for which the degradation will be computed and written (using the text provided with '--firdegtext' or the default value). The bins values must be comma (',') separated, and must be any of the bins provided with parameters '--availmapbins', '--contriskmapbins', '--contriskmarmapbins', '--ionoavailmapbins', '--hdopmapbins', '--pdopmapbins' or '--gdopmapbins'. The order is not important as they will be automatically sorted.
		NOTE: If option '--contriskaspercentage' is set and it is a Continuity Risk or Maritime Continuity Risk plot, the bins can also be set as a percentage.
--firdegtextbinseu, --FIRDegTextBinsEu	##,...	Same as '--firdegtextbins', but only applies to the European FIR area defined in option '--fireu'.

<p>--firdegtextbinsconus, #. #,...</p> <p>--FIRDegTextBinsCONUS</p>	<p>Same as '--firdegtextbins', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firdegtextbinsalaska, #. #,...</p> <p>--FIRDegTextBinsAlaska</p>	<p>Same as '--firdegtextbins', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--firdegtextbinscanada, #. #,...</p> <p>--FIRDegTextBinsCanada</p>	<p>Same as '--firdegtextbins', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firdegtextbinsmexico, #. #,...</p> <p>--FIRDegTextBinsMexico</p>	<p>Same as '--firdegtextbins', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firdegtextsize, #</p> <p>--FIRDegTextSize</p>	<p>Set the text size for the FIR availability degradation [DEFAULT 5] Set this option for each user defined FIR area drawn (option '--firuser'). If only one FIR area is drawn (including the European FIR area), this Option will be set for that area (so it keeps compatibility with previous versions).</p>
<p>--firdegtextsizeeu, #</p> <p>--FIRDegTextSizeEu</p>	<p>Same as '--firdegtextsize', but only applies to the European FIR area defined in option '--fireu'.</p>
<p>--firdegtextsizeconus, #</p> <p>--FIRDegTextSizeCONUS</p>	<p>Same as '--firdegtextsize', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firdegtextsizealaska, #</p> <p>--FIRDegTextSizeAlaska</p>	<p>Same as '--firdegtextsize', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--firdegtextsizecanada, #</p> <p>--FIRDegTextSizeCanada</p>	<p>Same as '--firdegtextsize', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firdegtextsizemexico, #</p> <p>--FIRDegTextSizeMexico</p>	<p>Same as '--firdegtextsize', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firdegtextsizefirsum, #</p> <p>--FIRDegTextSizeFIRSum</p>	<p>Same as '--firdegtextsize', but only applies to the text for the sum of the degradation for all of the FIR areas defined This option also sets '--firsumdeg'.</p>
<p>--firdegtextcolor, <color></p> <p>--FIRDegTextColor</p>	<p>Set the text colour for the FIR availability degradation [DEFAULT 'white'] Set this option for each user defined FIR area drawn (option '--firuser'). If only one FIR area is drawn (including the European FIR area), this option will be set for that area (so it keeps compatibility with previous versions).</p>
<p>--firdegtextcoloreu, <color></p> <p>--FIRDegTextColorEu</p>	<p>Same as '--firdegtextcolor', but only applies to the European FIR area defined in option '--fireu'.</p>

<p>--firdegtextcolorconus, <color> --FIRDegTextColorCONUS</p>	<p>Same as '--firdegtextcolor', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firdegtextcoloralaska, <color> --FIRDegTextColorAlaska</p>	<p>Same as '--firdegtextcolor', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--firdegtextcolorcanada, <color> --FIRDegTextColorCanada</p>	<p>Same as '--firdegtextcolor', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firdegtextcolormexico, <color> --FIRDegTextColorMexico</p>	<p>Same as '--firdegtextcolor', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firdegtextcolorfirsum, <color> --FIRDegTextColorFIRSum</p>	<p>Same as '--firdegtextcolor', but only applies to the text for the sum of the degradation for all of the FIR areas defined. This option also sets '--firsumdeg'.</p>
<p>--firdegtextposition, #,# --FIRDegTextPosition</p>	<p>Set the text position for the FIR availability degradation. Position must be given in x and y coordinates, separated by a comma (',') (for example "0.3,0.5"). The coordinate are respect to the lower left corner of the plot [DEFAULT 0.245,0.88] Set this option for each user defined FIR area drawn option '--firuser'). If only one FIR area is drawn (including the European FIR area), this option will be set for that area (so it keeps compatibility with previous versions).</p>
<p>--firdegtextpositioneu, #,# --FIRDegTextPositionEu</p>	<p>Same as '--firdegtextposition', but only applies to the European FIR area defined in option '--fireu'.</p>
<p>--firdegtextpositionconus, #,# --FIRDegTextPositionCONUS</p>	<p>Same as '--firdegtextposition', but only applies to the CONUS FIR area defined in option '--firconus'.</p>
<p>--firdegtextpositionalaska, #,# --FIRDegTextPositionAlaska</p>	<p>Same as '--firdegtextposition', but only applies to the Alaska FIR area defined in option '--firalaska'.</p>
<p>--firdegtextpositioncanada, #,# --FIRDegTextPositionCanada</p>	<p>Same as '--firdegtextposition', but only applies to the Canada FIR area defined in option '--fircanada'.</p>
<p>--firdegtextpositionmexico, #,# --FIRDegTextPositionMexico</p>	<p>Same as '--firdegtextposition', but only applies to the Mexico FIR area defined in option '--firmexico'.</p>
<p>--firdegtextpositionfirsum, #,# --FIRDegTextPositionFIRSum</p>	<p>Same as '--firdegtextposition', but only applies to the text for the sum of the degradation for all of the FIR areas defined. This option also sets '--firsumdeg'.</p>
<p>--nofirdegtext, #,#,... --NoFIRDegText</p>	<p>Do not print the degradation text in the map. This option is useful if the user is only interested in showing the FIR border</p>

but does not want any degradation text to be printed (this FIR will also be skipped in the degradation table if option '--firdegtxttable').

The parameter must come with a comma separated list with the number of the user defined FIR that shall not have degradation text. For instance, if user defines two FIR areas, and the second FIR area does not have to be plotted, then the parameter should be '--nofirdegtxt 2'.

NOTE: If the number provided is 0, all user defined FIR areas will not have degradation text printed.

--nofirdegtxt <u>eu</u> , --NoFIRDegText <u>Eu</u>	Same as '--nofirdegtxt', but only applies to the European FIR area defined in option '--fireu'.
--nofirdegtxt <u>conus</u> , --NoFIRDegText <u>CONUS</u>	Same as '--nofirdegtxt', but only applies to the CONUS FIR area defined in option '--firconus'.
--nofirdegtxt <u>alaska</u> , --NoFIRDegText <u>Alaska</u>	Same as '--nofirdegtxt', but only applies to the Alaska FIR area defined in option '--firalaska'.
--nofirdegtxt <u>canada</u> , --NoFIRDegText <u>Canada</u>	Same as '--nofirdegtxt', but only applies to the Canada FIR area defined in option '--fircanada'.
--nofirdegtxt <u>mexico</u> , --NoFIRDegText <u>Mexico</u>	Same as '--nofirdegtxt', but only applies to the Mexico FIR area defined in option '--firmexico'.
--firdegtxtmonospacefont, --FIRDegTextMonospaceFont	Set the FIR degradation type (for all FIRs texts in the plots) font to monospace. The monospace font preserves the alignment of text (default 'sans-serif' font has, for instance, different widths for '1' and '0' characters). The monospace font is always used when option '--firdegtxttable' is set.

- `--firdegtexttable,`
`--FIRDegTextTable` Show all degradation text FIR values in a table. The names for the user defined areas will be the filename (without extension). Each row of data will be for each bin defined with parameter '`--firdegtextbins`', and each column will be a different FIR area. Use parameters '`--firdegtextsize`', '`--firdegtextcolor`' and '`--firdegtextposition`' for setting its properties. If these parameters are set multiple times, the values provided the first time will prevail.
- `--printfirdegtext,`
`--PrintFIRDegText` Print the degradation text to standard output (does not work on Windows). If the FIR values are shown in table format (parameter '`--firdegtexttable`' is set), the whole table will be printed. Otherwise, each line of data will have its name of the FIR region prepended to the line, so as it can be distinguished from which FIR regions the current line belongs to. This option is compatible with '`--writetofilefirdegtext`' option.
- NOTE: Output text is encoded with 'utf-8'.
- `--writetofilefirdegtext, <filename>`
`--WriteToFileFIRDegText` Same as '`--printfirdegtext`' option, but instead of printing the FIR values to standard output, it will be written to the file provided (the output file will be truncated). This option is compatible with '`--printfirdegtext`' option.
- NOTE: Output text is encoded with 'utf-8'.
- `--onlyprintfirdegtext,`
`--OnlyPrintFIRDegText` Do not show the plots, just print the degradation text to standard output or to a file (as in options '`--printfirdegtext`' and '`--writetofilefirdegtext`'). If option '`--sv`' is set (save picture to file), then this option has no effect, as with '`--sv`' option plots are not shown.
- `--sbasplotsize, #,#`
`--SBASPlotSize` Set the plotting area size, by providing the horizontal and vertical size (in centimetres). The two values must be comma (',') separated. [DEFAULT 20.32,15.24]
- `--sbastopfiguremargin, #`
`--SBASTopFigureMargin` Set the top figure margin by providing the fraction of image size to be left as margin (starting from the top). The range values are [0-0.5], being 0 no top margin. Adding top margin makes the figure move downwards in the plot area (shrinking if necessary).

- sbasbottomfiguremargin, # Set the bottom figure margin by providing the fraction
--SBASBottomFigureMargin of image size to be left as margin (starting from the
bottom). The range values are [0-0.5], being 0 no
bottom margin. Adding bottom margin makes the
figure move upwards in the plot area (shrinking if
necessary).
- sbasleftfiguremargin, # Set the left figure margin by providing the fraction of
--SBASLeftFigureMargin image size to be left as margin (starting from the left).
The range values are [0-0.5], being 0 no left margin.
Adding left margin makes the figure move to the right in
the plot area (shrinking if necessary).
- sbasrightfiguremargin, # Set the right figure margin by providing the fraction of
--SBASRightFigureMargin image size to be left as margin (starting from the right).
The range values are [0-0.5], being 0 no right margin.
Adding right margin makes the figure move to the left in
the plot area (shrinking if necessary).
- countries, Draw the country borders in the map
--Countries
- usastates, Draw the USA states borders in the map
--USASates

Example:

```
graph.py -f /home/gLAB/Example --sbas --sv /home/Desktop/SBASAvailMap.eps
```

Example:

```
graph.py -f /home/gLAB/Example --SBAS
```

Options:

-h, --help show this help message and exit

6.1 SETTING THE AXIS

As seen in section 4.3 Analysis (DAT Interface) in general the axis source will be one column, and this can be specified that way:

-x 4

This will take as x axis the 4th column of the input file. This can also be expressed as:

-x '\$4'

This also means 4th column of the input file (The ' signs have been included for linux users. Windows users do not need to used them). Operations can be done in this parameter, such as:

-x '(\$4-\$5)'

This will take as x axis origin the difference between the 4th and 5th columns. This operation is also valid:

-x '(\$4*2-1)'

Mathematical functions and constants can be also used here, such as:

-x '(math.sin(\$12*math.pi/180)*(90-\$11)/90)'

6.2 SETTING THE CONDITIONS

As seen in section 4.3 Analysis (DAT Interface), the conditions are a way to insert one or more conditionals in order to select which lines of the source file are going to be used in the plotting.

The rules for this are as follows:

-c (\$6>=10)

This will only include the line if the 6th column is equal or greater than 10. It is also possible to specify a ser of conditions using AND [&] and OR [[]] operators, such as:

-c (\$6>=10)&(\$6<=20)|(\$8==2)

It is possible to specify that a column matches a specific string by surrounding the string by "\", such as:

-c (\$1=="OUTPUT")

It is possible to specify mathematical operations and constants, as: math.pi, math.e, math.sin() and math.cos(), as example:

-c (\$1=="POSTFIT")&(math.cos(\$11+5)>0.707)

It is possible to specify a specific character inside a column, by using \$x[y], being x the column and y the character position beginning by 0, such as:

-c (\$1=="POSTFIT")&(\$7[0]=="P") [First character of seventh column is 'P']

It is possible to operate between columns, such as:

-c ((\$9-\$11)<2)

Linux users, should use the ' signs to surround the parameter. Besides they should use “ instead of \” when comparing strings. Sample:

```
-c '($1=="OUTPUT")'
```

This is due to the difference when treating arguments between Windows and Linux Operating Systems.

6.3 PROCESSING EXAMPLE

The following example gives an overview of a simple plot generated using the gLAB DAT component. The sample uses a.out file generated by the DPC. In particular, uses the one generated in the example of section 5.1.

This example generates the same plot that would generate the template button of *Receiver NEU position error* of the GUI (Analysis tab).

Opening a command line window in the gLAB directory (in Windows this can be directly done by the option “Command line in directory” in the program group installed in the Start menu. Using this option a command line window will open (Figure 5-1) in the proper directory.

In order to generate the plot, the following command should be executed:

```
win\graph.exe -t "Receiver NEU position error" --xl="time (s)"  
--yl="error (m)" -f gLAB_DPC.out -x 4 -y 18 -c "($1=='OUTPUT')"  
-l "North error" -f gLAB_DPC.out -x 4 -y 19 -c "($1=='OUTPUT')"  
-l "East error" -f gLAB_DPC.out -x 4 -y 20 -c "($1=='OUTPUT')"  
-l "Up error"
```

This will generate the plot seen in Figure 4-27.

End of Document